

Kuppler


mit Ventil

Coupleur

avec Soupape

Coupler

with valve

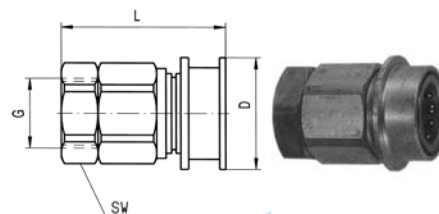B-VEAC


Type -G	Mat.-Nr.	bar	SW	L	D	kg/10
B-VEAC4-G $\frac{1}{4}$ i	YBD.EA42.1040	100	22.0	42.0	28.8	1.080
B-VEAC6-G $\frac{3}{8}$ i	YBD.EA42.1060	100	25.4	48.0	33.3	1.570
B-VEAC8-G $\frac{1}{2}$ i	YBD.EA42.1080	100	30.0	53.0	36.5	1.900
B-VEAC12-G $\frac{3}{4}$ i	YBD.EA42.1090	100	38.0	61.5	47.6	2.100
B-VEC16-G1i	YBD.OE42.1100	35	47.6	67.8	55.5	3.380

Stecker mit Innengewinde


mit Ventil

Embout avec filetage femelle

avec soupape

Nipple with female thread

with valve


B-VEAN

Type -G	Mat.-Nr.	bar	SW	L	kg/10
B-VEAN4-G $\frac{1}{4}$ i	YBD.EA44.1040	100	22	25.4	0.700
B-VEAN6-G $\frac{3}{8}$ i	YBD.EA44.1060	100	25	29.0	1.050
B-VEAN8-G $\frac{1}{2}$ i	YBD.EA44.1080	100	30	32.0	1.550
B-VEAN12-G $\frac{3}{4}$ i	YBD.EA44.1090	100	38	35.6	2.700

Stecker mit Innengewinde


mit Ventil

Embout avec filetage femelle

avec soupape

Nipple with female thread

with valve


B-VEN

Type -G	Mat.-Nr.	bar	SW	L	kg/10
B-VEN16-G1i	YBD.OE44.1100	35	47	43.4	4.530

Kuppler mit Innengewinde


ohne Ventil

Coupleur avec filetage femelle

sans soupape

Coupling with female thread

without valve



B-PHC

Type -G	Mat.-Nr.	bar	SW	L	D	kg/10
B-PHC4-G $\frac{1}{4}$ i	YBD.OH41.1040	280	22	34.0	25.4	0.770
B-PHC6-G $\frac{3}{8}$ i	YBD.OH41.1060	280	25	38.1	30.2	1.150
B-PHC8-G $\frac{1}{2}$ i	YBD.OH41.1080	280	30	41.2	35.3	1.550
B-PHC12-G $\frac{3}{4}$ i	YBD.OH41.1090	245	38	48.5	41.4	2.500
B-PHC16-G1i	YBD.OH41.1100	210	47	52.6	50.8	4.180

Kuppler mit Innengewinde


mit Ventil

Coupleur avec filetage femelle

avec soupape

Coupling with female thread

with valve

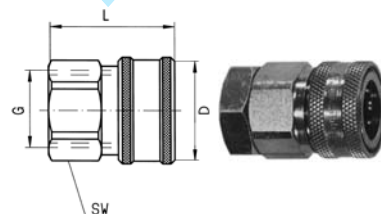

B-VHC

Type -G	Mat.-Nr.	bar	SW	L	D	kg/10
B-VHC4-G $\frac{1}{4}$ i	YBD.OH42.1040	155	22	41.9	25.4	1.070
B-VHC6-G $\frac{3}{8}$ i	YBD.OH42.1060	155	25	48.3	30.2	1.560
B-VHC8-G $\frac{1}{2}$ i	YBD.OH42.1080	140	30	53.1	35.3	2.180
B-VHC12-G $\frac{3}{4}$ i	YBD.OH42.1090	140	38	61.5	41.4	3.700
B-VHC16-G1i	YBD.OH42.1100	125	47	67.8	50.8	6.070

Kuppler mit Innengewinde NPT


mit Ventil

Coupleur avec filetage femelle NPT

avec soupape

Coupling with female thread NPT

with valve

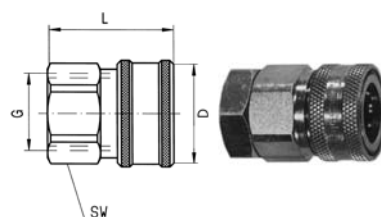

B-VHC-NPT

Type -G	Mat.-Nr.	bar	SW	L	D	kg/10
B-VHC4- $\frac{1}{4}$ NPSi	YBD.OH42.2040	155	22	41.9	25.4	0.940
B-VHC6- $\frac{3}{8}$ NPSi	YBD.OH42.2060	155	25	48.3	30.2	1.500
B-VHC8- $\frac{1}{2}$ NPSi	YBD.OH42.2080	140	30	53.1	35.2	2.080
B-VHC12- $\frac{3}{4}$ NPSi	YBD.OH42.2090	140	38	61.5	41.4	3.420
B-VHC16-1 NPSi	YBD.OH42.2100	125	47	67.8	50.8	5.660

Stecker mit Innengewinde


ohne Ventil

Embout avec filetage femelle

sans soupape

Nipple with female thread

without valve



B-PHN

Type -G	Mat.-Nr.	bar	SW	L	kg/10
B-PHN4-G $\frac{1}{4}$ i	YBD.OH43.1040	280	16	18.5	0.250
B-PHN6-G $\frac{3}{8}$ i	YBD.OH43.1060	280	20	20.3	0.380
B-PHN8-G $\frac{1}{2}$ i	YBD.OH43.1080	280	25	25.4	0.720
B-PHN12-G $\frac{3}{4}$ i	YBD.OH43.1090	245	30	26.1	1.020
B-PHN16-G1i	YBD.OH43.1100	210	38	30.2	1.800

Stecker mit Innengewinde NPT


ohne Ventil

Embout avec filetage femelle NPT

sans soupape

Nipple with female thread NPT

without valve



B-PHN-NPT

Type -G	Mat.-Nr.	bar	SW	L	kg/10
B-PHN4- $\frac{1}{4}$ NPSi	YBD.OH43.2040	280	16	18.5	0.250
B-PHN6- $\frac{3}{8}$ NPSi	YBD.OH43.2060	280	20	20.3	0.360
B-PHN8- $\frac{1}{2}$ NPSi	YBD.OH43.2080	280	25	25.4	0.660
B-PHN12- $\frac{3}{4}$ NPSi	YBD.OH43.2090	245	30	26.1	0.930
B-PHN16-1 NPSi	YBD.OH43.2100	210	38	30.2	1.650

Stecker mit Innengewinde


mit Ventil

Embout avec filetage femelle

avec soupape

Nipple with female thread

with valve



B-VHN

Type -G	Mat.-Nr.	bar	SW	L	kg/10
B-VHN4-G $\frac{1}{4}$ i	YBD.OH44.1040	155	22	25.4	0.700
B-VHN6-G $\frac{3}{8}$ i	YBD.OH44.1060	155	25	28.4	0.985
B-VHN8-G $\frac{1}{2}$ i	YBD.OH44.1080	140	30	32.0	1.530
B-VHN12-G $\frac{3}{4}$ i	YBD.OH44.1090	140	38	35.6	2.600
B-VHN16-G1i	YBD.OH44.1100	125	47	41.7	4.440

Stecker mit Innengewinde NPT


mit Ventil

Embout avec filetage femelle NPT

avec soupape

Nipple with female thread NPT

with valve



B-VHN-NPT

Type -G	Mat.-Nr.	bar	SW	L	kg/10
B-VHN4-1/4 NPSi	YBD.0H44.2040	155	22	25.4	0.690
B-VHN6-3/8 NPSi	YBD.0H44.2060	155	25	28.4	0.950
B-VHN8-1/2 NPSi	YBD.0H44.2080	140	30	32.0	1.500
B-VHN12-3/4 NPSi	YBD.0H44.2090	140	38	35.6	2.600
B-VHN16-1 NPSi	YBD.0H44.2100	125	47	41.7	4.350

Kuppler mit Innengewinde


mit Ventil

Coupleur avec filetage femelle

avec soupape

Coupling with female thread

with valve

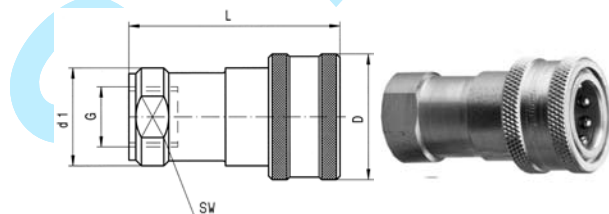

B-V72C

Type -G	Mat.-Nr.	bar	SW	L	D	kg/10
B-V72C4-G 1/4i	YBD.7242.1040	260	19	58.8	30.0	1.370
B-V72C6-G 3/8i	YBD.7242.1060	190	25	67.3	34.8	2.000
B-V72C8-G 1/2i	YBD.7242.1080	210	31	76.9	44.5	5.000
B-V72C12-G 3/4i	YBD.7242.1090	155	38	91.6	53.9	8.000
B-V72C16-G 1i	YBD.7242.1100	105	44	108.2	63.5	11.000

Stecker mit Innengewinde


mit Ventil

Embout avec filetage femelle

avec soupape

Nipple with female thread

with valve

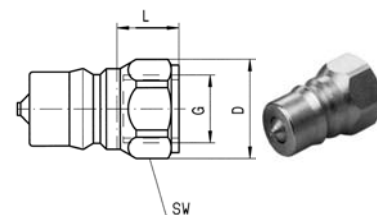

B-V72N

Type -G	Mat.-Nr.	bar	SW	L	D	kg/10
B-V72N4-G 1/4i	YBD.7244.1040	260	19	14.2	21.0	1.000
B-V72N6-G 3/8i	YBD.7244.1060	190	22	14.2	24.4	2.500
B-V72N8-G 1/2i	YBD.7244.1080	210	28	19.3	31.5	2.000
B-V72N12-G 3/4i	YBD.7244.1090	155	35	17.3	38.4	2.210
B-V72N16-G 1i	YBD.7244.1100	105	41	22.3	45.8	4.000

Stecker mit SERTO-Anschluss


ohne Ventil

Coupleur avec raccordement SERTO

sans soupape

Nipple with SERTO connection

without valve

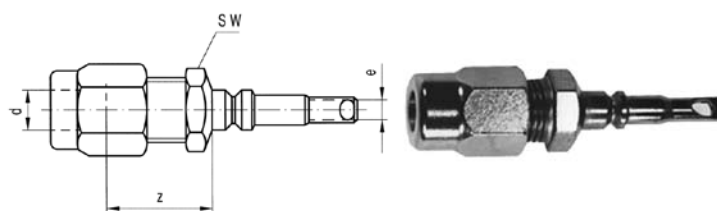
B-PTN-SERTO

Type -d	Mat.-Nr.	bar	SW	z	e	kg/100
B-PTN2-SG.3	YDD.0T43.10300	20	11	17.0	4.0	1.840
B-PTN2-SG.4	YDD.0T43.10400	20	11	17.0	4.0	1.840
B-PTN2-SG.5	YDD.0T43.10500	20	11	17.0	4.0	1.740
B-PTN2-SG.6	YDD.0T43.10600	20	11	17.0	4.0	1.940
B-PTN2-SG.3,2	YDD.0T43.13200	20	11	17.0	4.0	1.800
B-PTN2-SG.6,35	YDD.0T43.10700	20	11	17.0	4.0	1.840