

## Clevis Bracket - MP2




Intended for flexible mounting of cylinder.  
Can be combined with clevis bracket MP4 and pivot bracket with rigid bearing AB7.

### Materials:

Clevis bracket: Aluminium  
(none surface treatment)  
Pin: Surface hardened steel  
Locking pin: Spring steel  
Circlips according to DIN 471:  
Spring steel  
Mounting screws acc. to DIN 912:  
Zinc-plated steel 8.8

Supplied complete with mounting screws  
for attachment to the cylinder.

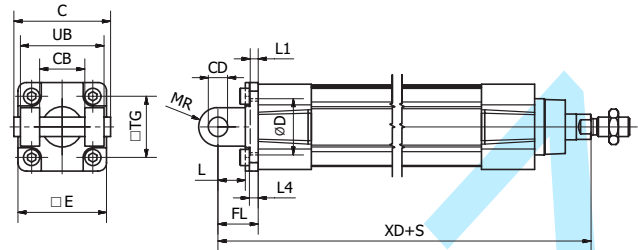

### According to ISO 15552

Cyl.-bore	C	E	UB	CB	TG	FL	L1	L	L4	D	CD	MR	XD*	Weight	Order code
[mm]	[mm]	[mm]	[mm]	[mm]	[mm]	[mm]	[mm]	[mm]	[mm]	[mm]	[mm]	[mm]	[mm]	[kg]	
Ø32	53	45	45	26	32.5	22	5	13	5.5	30	10	10	142	0.08	<b>P1C-4KMTB</b>
Ø40	60	52	52	28	38	25	5	16	5.5	35	12	12	160	0.10	<b>P1C-4LMTB</b>
Ø50	68	65	60	32	46.5	27	5	16	6.5	40	12	12	170	0.18	<b>P1C-4MMTB</b>
Ø63	78	75	70	40	56.5	32	5	21	6.5	45	16	16	190	0.24	<b>P1C-4NMTB</b>
Ø80	98	95	90	50	72	36	5	22	10	45	16	16	210	0.49	<b>P1C-4PMTB</b>
Ø100	118	115	110	60	89	41	5	27	10	55	20	20	230	0.73	<b>P1C-4QMTB</b>
Ø125	139	140	130	70	110	50	7	30	10	60	25	25	275	1.37	<b>P1C-4RMTB</b>

\*Does not apply to cylinders with piston rod extension or lock units.

## Clevis Bracket - MP4




Intended for flexible mounting of cylinder. Clevis bracket MP4 can be combined with clevis bracket MP2.

### Materials:

Clevis bracket: Aluminium  
(none surface treatment)  
Bush: Steel and PTFE  
Mounting screws acc. to DIN 912:  
Zinc-plated steel 8.8

Supplied complete with mounting screws  
for attachment to the cylinder.

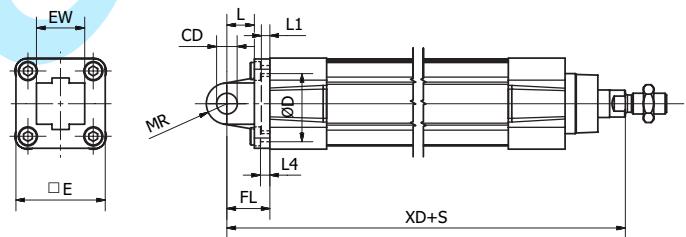

### According to ISO 15552

Cyl.-bore	CD	D	E	EW	FL	L	L1	L4	MR	TG	XD*	Weight	Order code
[mm]	[mm]	[mm]	[mm]	[mm]	[mm]	[mm]	[mm]	[mm]	[mm]	[mm]	[mm]	[kg]	
Ø32	10	30	47	26	22	12	6.5	6	10.5	32.5	142	0.08	<b>P1C-4KMEB</b>
Ø40	12	35	52	28	25	16	5	5.5	12	38	160	0.11	<b>P1C-4LMEB</b>
Ø50	12	40	65	32	27	16	5	6.5	12	46.5	170	0.18	<b>P1C-4MMEB</b>
Ø63	16	45	78	40	32	21	5	6.5	16	56.5	190	0.28	<b>P1C-4NMEB</b>
Ø80	16	45	95	50	36	22	5	10	16	72	210	0.52	<b>P1C-4PMEB</b>
Ø100	20	55	115	60	41	27	5	10	20	89	230	0.79	<b>P1C-4QMEB</b>
Ø125	25	60	140	70	50	30	7	10	25	110	275	1.46	<b>P1C-4RMEB</b>

\*Does not apply to cylinders with piston rod extension or lock units.