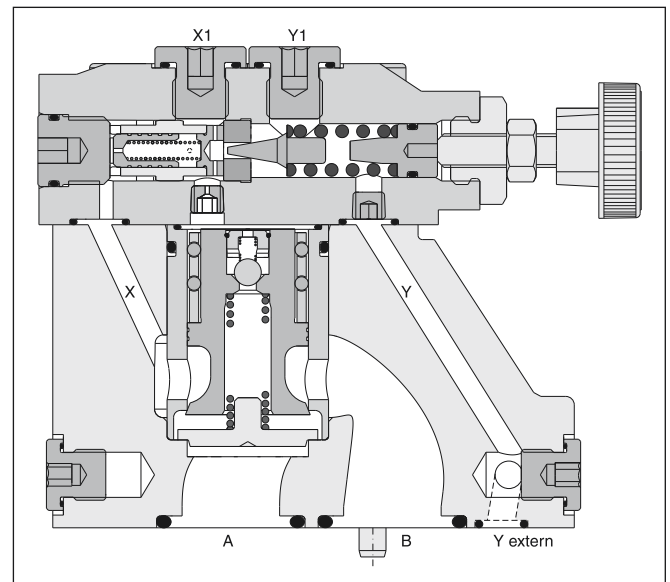



Subplate mounted pressure reducing valves are available with both Parker (series PR) and Denison (series R4R) model codes.

These valves are used to control the pressure in the secondary part of the hydraulic system. Independent of the primary pressure the secondary pressure is reduced to the pressure setting. In order to avoid undesired motion the valves are normally closed.

Features

- Pilot operated with manual adjustment
- Subplate mounting acc. to ISO 5781
- Normally closed to avoid unintended motion
- 4 pressure stages
- 3 adjustment modes
 - hand knob
 - acorn nut with lead seal
 - DIN lock

**4****Technical data**

General				
Nominal size		10	25	32
Interface		Subplate mounting acc. ISO 5781		
Mounting position		as desired, horizontal mounting preferred		
Ambient temperature	[°C]	-20...+80		
Weight	[kg]	4.8	7.2	13.5
Hydraulic				
Max. operating pressure	[bar]	Ports A, B and X 350, port Y depressurized		
Pressure stages	[bar]	105, 175, 250, 350 (series PR), 105, 210, 350 (series R4R)		
Nominal flow	[l/min]	150	350	650
Fluid		Hydraulic oil according to DIN 51524 ... 525		
Viscosity, recommended	[cSt] / [mm²/s]	30 ... 50		
permitted	[cSt] / [mm²/s]	20 ... 380		
Fluid temperature	[°C]	-20 ... +70		
Filtration		ISO 4406 (1999); 18/16/13		

Parker

PR		M			1	P		9	
Pressure reducing valve	Nominal size	Interface	Pressure stages	Adjustment	Pilot oil: external drain	Poppet spring	Seals	Normally closed	Design series (not required for ordering)


Code	Nominal size
10	NG10
25	NG25
32	NG32

Code	Interface
M	Subplate mounting ISO 5781

Code	Pressure stages
10	up to 105 bar
17	up to 175 bar
25	up to 250 bar
35	up to 350 bar

Code	Seals
N	NBR
V	FPM

Code	Adjustment
S	Hand knob (Standard)
L	DIN lock
A	Acorn nut with lead seal



The Parker model code should be used for all new applications. Otherwise also refer to Denison model code.

Denison

R	4	R		5	9			B		
Pressure valve	Interface	Reducing function	Nominal size		Pilot ports G1/4"	Pressure stages	Adjustment	Pilot oil	Design series	Seals

Code	Interface
4	Subplate mounting ISO 5781


Code	Nominal size
03	NG10
06	NG25
10	NG32

Code	Pressure stages
1	up to 105 bar
3	up to 210 bar
5	up to 350 bar

Code	Seals
1	NBR
5	FPM

Pilot oil		
Code	Pilot	Drain
1	Internal	External from Y
2	Internal	Internal from Y1


Code	Adjustment
1	Hand knob 32mm dia. (Standard)
3	Acorn nut with lead seal
4	DIN lock




The Denison model code is available for existing applications. Otherwise also refer to Parker model code.

Reduced pressure pA versus flow Q

PR10M ¹⁾

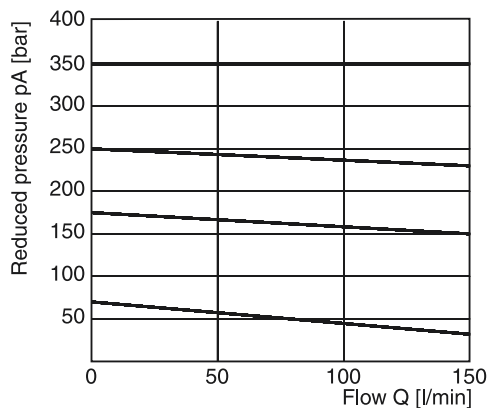


Minimum pressure curve

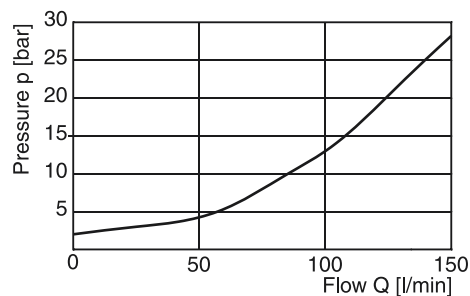


Reduced pressure pA versus flow Q

PR25M ¹⁾

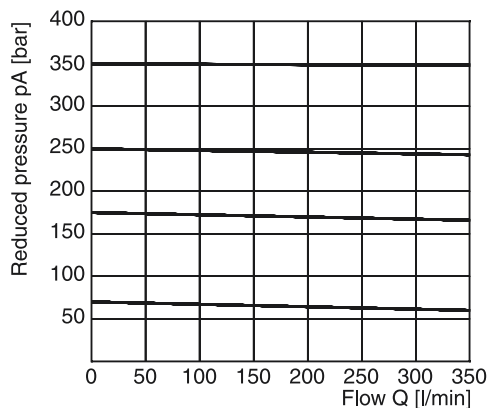


Minimum pressure curve

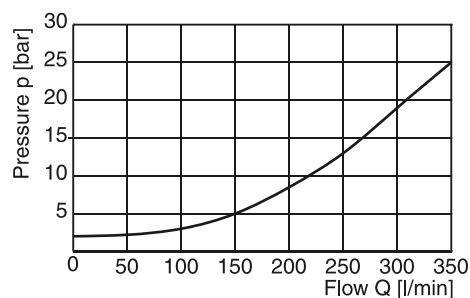


Reduced pressure pA versus flow Q

PR32M ¹⁾

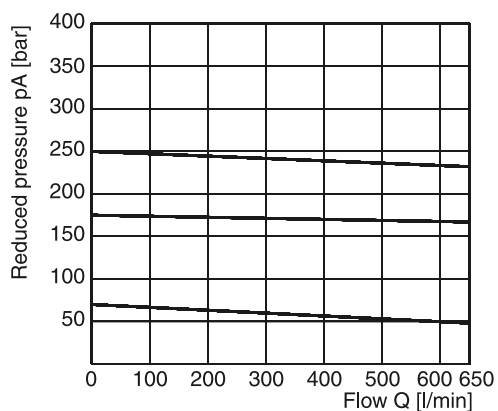


Minimum pressure curve

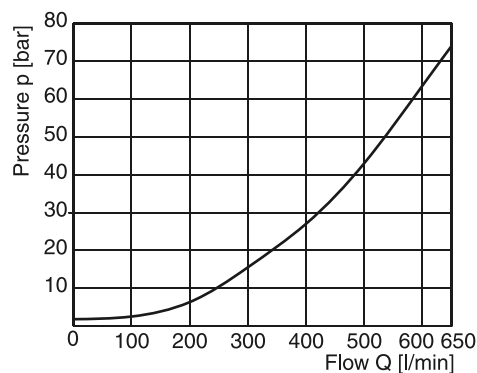

¹⁾ Measured at 350 bar primary pressure pB.

PR*M

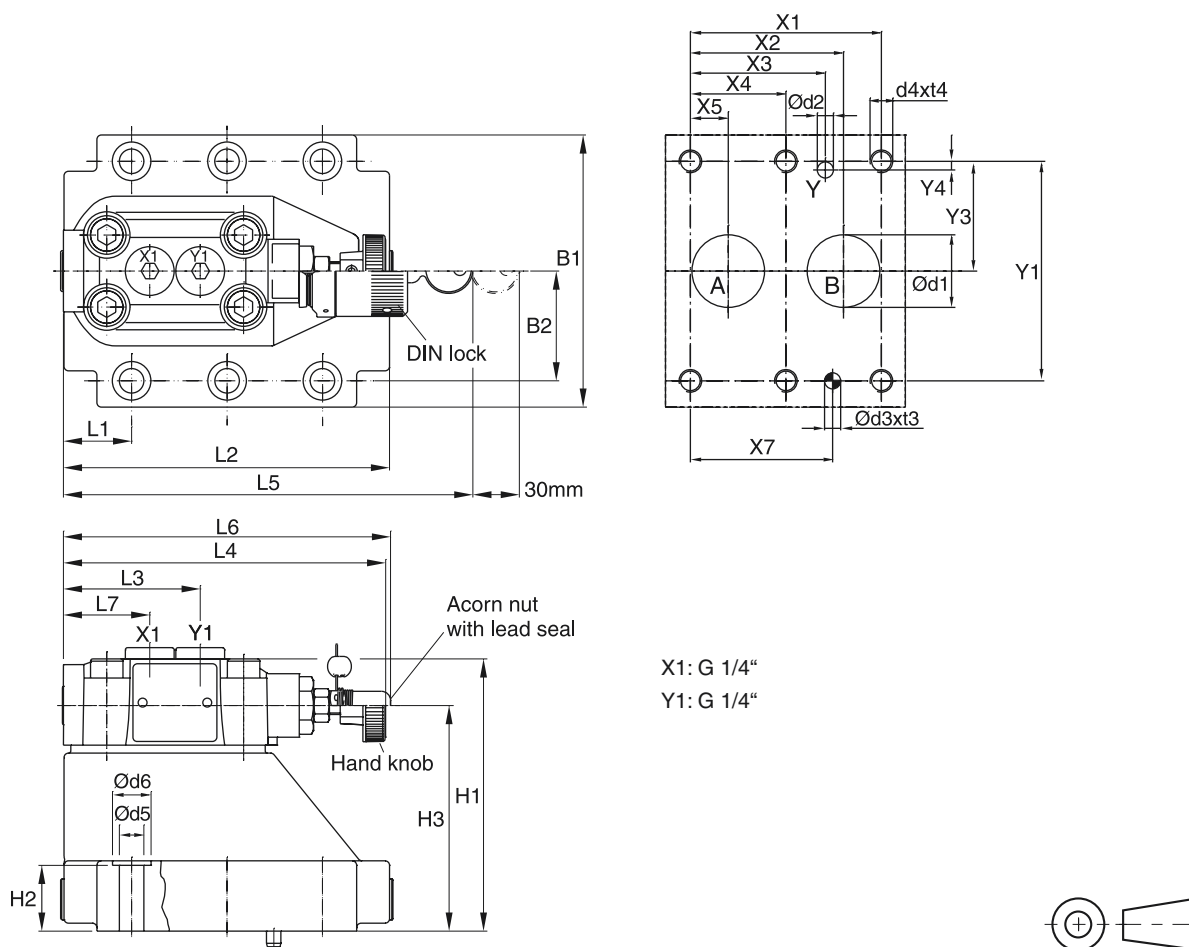

NG	ISO-code	x1	x2	x3	x4	x5	x6	x7	y1	y2	y3	y4	y5	y6
10	5781-06-07-0-00	42.9	35.8	21.5	—	7.2	—	31.8	66.7	—	33.4	7.9	—	—
25	5781-08-10-0-00	60.3	49.2	39.7	—	11.1	—	44.5	79.4	—	39.7	6.4	—	—
32	5781-10-13-0-00	84.2	67.5	59.5	42.1	16.7	—	62.7	96.8	—	48.4	3.8	—	—

Tolerance for all dimensions ± 0.2

NG	ISO-code	B1	B2	H1	H2	H3	H4	H5	H6	L1	L2	L3	L4	L5	L6	L7
10	5781-06-07-0-00	87.3	33.35	83	21	62.5	—	—	—	29	94.8	60.8	143	181	144.8	38.6
25	5781-08-10-0-00	105	39.7	109.5	29	89	—	—	—	34.7	126.8	60.8	143	181	144.8	38.6
32	5781-10-13-0-00	120	48.4	120	29	99.5	—	—	—	30.6	144.3	60.8	143	181	144.8	38.6

NG	ISO-code	d1max	d2max	d3	t3	d4	t4	d5	d6
10	5781-06-07-0-00	15	7	7.1	8	M10	16	10.8	17
25	5781-08-10-0-00	23.4	7.1	7.1	8	M10	18	10.8	17
32	5781-10-13-0-00	32	7.1	7.1	8	M10	20	10.8	17

NG	ISO-code	Bolt kit - DIN912 12.9		Kit		Surface finish
				NBR	FPM	
10	5781-06-07-0-00	BK-M10 x 35-4pcs	63 Nm $\pm 15\%$	SK-PR10MN50	SK-PR10MV50	
25	5781-08-10-0-00	BK-M10 x 45-4pcs	63 Nm $\pm 15\%$	SK-PR25MN50	SK-PR25MV50	
32	5781-10-13-0-00	BK-M10 x 45-6pcs	63 Nm $\pm 15\%$	SK-PR32MN50	SK-PR32MV50	