


Push-Button Couplers

KP-Series - A new self-venting coupler is born in Parker Rectus safety range

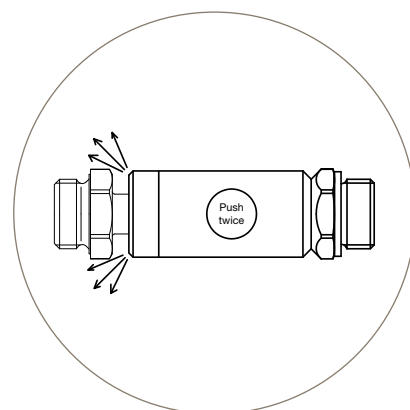

Easy-to-use and **ergonomics** for an intuitive and effortless handling, with one hand

Security

No unintentional disconnection and whiplash effect to prevent the risk of work accident

Interchangeability

EURO - ISO C - ISO B

Silicone-free



Long-term reliability

Flexibility

Orientable, to facilitate assembly and disassembly

Recognizability

Profile marked on the body to prevent damages due to a bad connection

Regulations

Compliant with ISO 4414, RoHS, REACH

Robustness and lightweight

Aluminium material

For use with all compressed air networks, all industries
Connection on pneumatic tools, blowguns, special machines, assembly lines



KP-Couplers are part of our Safety Program



ENGINEERING YOUR SUCCESS.

All new KP-Couplers at a Glance



www.parker.com/LPCE

Technical Characteristics

Max. Working Pressure 12 bar

Working Temperature -20°C up to +100°C

Component Materials
Coupling: Anodised aluminium, nickel plated brass
Plug: Nickel plated steel, zinc plated steel (Series 26KP)
Seal: NBR

Series 26KP

DN 7.4

Flow Rate: 1.225 l/min.*

European Profile

Series 18KP

DN 5.5

Flow Rate: 810 l/min.*

ISO 6150 C-10 Profile

Series 84KP

DN 8.0

Flow Rate: 2.100 l/min.*

ISO 6150 C-14 Profile

Series 24KP

DN 5.5

Flow Rate: 675 l/min.*

ISO 6150 B-12 Profile

Series 30KP

DN 8.0

Flow Rate: 1.470 l/min.*

ISO 6150 B-15 Profile



Male Thread

Coupler

| | |
|-------|-------------|
| G 1/4 | 26KPAW13APX |
| G 3/8 | 26KPAW17APX |
| G 1/2 | 26KPAW21APX |

Plug

| | |
|-------|-------------|
| R 1/4 | 25SFAK13SXZ |
| R 3/8 | 25SFAK17SXZ |
| R 1/2 | 25SFAK21SXZ |

Female Thread

Coupler

| | |
|-------|-------------|
| G 1/4 | 26KPIW13APX |
| G 3/8 | 26KPIW17APX |
| G 1/2 | 26KPIW21APX |

Plug

| | |
|-------|-------------|
| G 1/4 | 25SFIW13SXZ |
| G 3/8 | 25SFIW17SXZ |
| G 1/2 | 25SFIW21SXZ |

Hose Barb (I.D.)

Coupler

| | |
|-------|-------------|
| 6 mm | 26KPTF06APX |
| 8 mm | 26KPTF08APX |
| 10 mm | 26KPTF10APX |
| 13 mm | 26KPTF13APX |

Plug

| | |
|-------|-------------|
| 6 mm | 25SFTF06SXZ |
| 8 mm | 25SFTF08SXZ |
| 10 mm | 25SFTF10SXZ |
| 13 mm | 25SFTF13SXZ |

| | |
|-------|-------------|
| G 1/4 | 18KPAW13APX |
| G 3/8 | 18KPAW17APX |
| G 1/2 | 18KPAW21APX |

| | |
|-------|-------------|
| G 1/4 | 18SFAW13SXN |
| G 3/8 | 18SFAW17SXN |

| | |
|-------|-------------|
| G 1/4 | 18KPIW13APX |
| G 3/8 | 18KPIW17APX |
| G 1/2 | 18KPIW21APX |

| | |
|-------|-------------|
| G 1/4 | 18SFIW13SXN |
| G 3/8 | 18SFIW17SXN |

| | |
|-------|-------------|
| 6 mm | 18KPTF06APX |
| 8 mm | 18KPTF08APX |
| 9 mm | 18KPTF09APX |
| 13 mm | 18KPTF13APX |

| | |
|-------|-------------|
| 6 mm | 18SFTF06SXN |
| 8 mm | 18SFTF08SXN |
| 10 mm | 18SFTF10SXN |
| 13 mm | 18SFTF13SXN |

| | |
|-------|-------------|
| G 1/4 | 84KPAW13APX |
| G 3/8 | 84KPAW17APX |
| G 1/2 | 84KPAW21APX |

| | |
|-------|-------------|
| G 1/4 | 84SFAW13SXN |
| G 3/8 | 84SFAW17SXN |
| G 1/2 | 84SFAW21SXN |

| | |
|-------|-------------|
| G 1/4 | 84KPIW13APX |
| G 3/8 | 84KPIW17APX |
| G 1/2 | 84KPIW21APX |

| | |
|-------|-------------|
| G 1/4 | 84SFIW13SXN |
| G 3/8 | 84SFIW17SXN |

| | |
|-------|-------------|
| 10 mm | 84KPTF10APX |
| 13 mm | 84KPTF13APX |

| | |
|-------|-------------|
| 10 mm | 84SFTF10SXN |
| 13 mm | 84SFTF13SXN |

| | |
|-------|-------------|
| G 1/4 | 24KPAW13APX |
| G 3/8 | 24KPAW17APX |
| G 1/2 | 24KPAW21APX |

| | |
|-------|-------------|
| R 1/4 | 23SFAK13SXN |
| R 3/8 | 23SFAK17SXN |
| R 1/2 | 23SFAK21SXN |

| | |
|-------|-------------|
| G 1/4 | 24KPIW13APX |
| G 3/8 | 24KPIW17APX |
| G 1/2 | 24KPIW21APX |

| | |
|-------|-------------|
| G 1/4 | 23SFIW13SXN |
| G 3/8 | 23SFIW17SXN |
| G 1/2 | 23SFIW21SXN |

| | |
|-------|-------------|
| 6 mm | 24KPTF06APX |
| 8 mm | 24KPTF08APX |
| 10 mm | 24KPTF10APX |

| | |
|-------|-------------|
| 6 mm | 23SFTF06SXN |
| 8 mm | 23SFTF08SXN |
| 10 mm | 23SFTF10SXN |

| | |
|-------|-------------|
| G 1/4 | 30KPAW13APX |
| G 3/8 | 30KPAW17APX |
| G 1/2 | 30KPAW21APX |

| | |
|-------|-------------|
| G 1/4 | 30SFAW13SXN |
| G 3/8 | 30SFAW17SXN |
| G 1/2 | 30SFAW21SXN |

| | |
|-------|-------------|
| G 1/4 | 30KPIW13APX |
| G 3/8 | 30KPIW17APX |
| G 1/2 | 30KPIW21APX |

| | |
|-------|-------------|
| G 1/4 | 30SFIW13SXN |
| G 3/8 | 30SFIW17SXN |
| G 1/2 | 30SFIW21SXN |

| | |
|-------|-------------|
| 8 mm | 30KPTF08APX |
| 10 mm | 30KPTF10APX |

| | |
|-------|-------------|
| 8 mm | 30SFTF08SXN |
| 10 mm | 30SFTF10SXN |

* Measurement data generated at input pressure 6 bar, pressure drop 0.6 bar



Check here your plug. Scale 1:1



ENGINEERING YOUR SUCCESS.