


## Doppelnippel NPT-NPT

### Mamelon double NPT-NPT

### Male threaded adaptor NPT-NPT

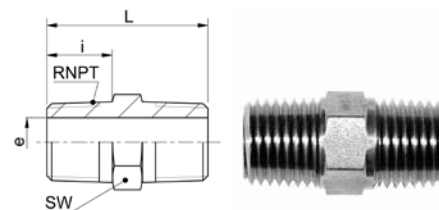

#### AD HN 50 NPT-NPT

Type -RNPT	Mat.-Nr.	bar	SW	L	i	e	kg/100
RNPT=NPT Gewinde	RNPT=Filetage NPT						
AD HN 50-1/8 NPT-1/8 NPT	TAD.5111.042	400	12	25.0	9.5	6.0	1.110
AD HN 50-1/4 NPT-1/4 NPT	TAD.5111.104	400	14	31.0	12.5	8.0	2.140
AD HN 50-3/8 NPT-3/8 NPT	TAD.5111.166	330	17	33.0	12.5	10.5	3.340
AD HN 50-1/2 NPT-1/2 NPT	TAD.5111.228	330	22	43.0	17.5	13.0	6.940
AD HN 50-3/4 NPT-3/4 NPT	TAD.5111.292	330	27	48.0	19.0	21.0	7.450
AD HN 50-1 NPT-1 NPT	TAD.5111.414	200	36	52.0	21.0	26.0	13.690

## Doppelnippel G-G


60°-Innenkonus

### Mamelon double G-G

cône intérieur 60°

### Male threaded adaptor G-G

60° inner cone

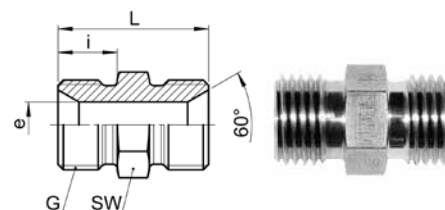

#### ADH HNC 50

Type -G	Mat.-Nr.	bar	SW	L	i	e	kg/100
G=Rohrgewinde (zylindrisch)	G=Filetage-gaz BSP (cylindrique)						
ADH HNC 50-1/4 -1/4	496.5100.104	400	14	26.0	10.0	7.5	1.490
ADH HNC 50-3/8 -3/8	496.5100.166	400	17	28.0	11.0	8.5	2.560

## Doppelnippel G-R


60° Innenkonus / kegeliges Aussengewinde

### Mamelon double G-R

cône intérieur 60° / filetage conique

### Male threaded adaptor G-R

60° inner cone / tapered male thread

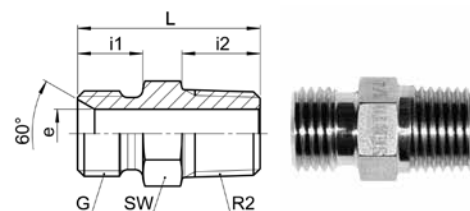

#### ADH HNIC 50

Type -G -R2	Mat.-Nr.	bar	SW	L	i1	i2	e	kg/100
G=Rohrgewinde (zylindrisch)	G=Filetage-gaz BSP (cylindrique)							
R2=Rohrgewinde (kegelig)	R2=Filetage-gaz BSP (conique)							
ADH HNIC 50-1/8 -1/8	496.5210.042	400	10	22.0	9.0	8.0	4.0	0.760
ADH HNIC 50-1/4 -1/4	496.5210.104	400	14	28.0	11.0	12.0	7.5	1.120
ADH HNIC 50-3/8 -3/8	496.5210.166	400	17	30.0	11.5	12.0	10.0	3.280
ADH HNIC 50-1/2 -1/2	496.5210.228	400	22	34.0	12.0	14.0	12.0	5.480
ADH HNIC 50-3/4 -3/4	496.5210.292	200	27	38.0	13.0	16.0	17.0	9.000