

Kugelhahn

mit Innengewinde


Vanne à bille

avec taraudage

Ball valve

with female thread

SO BV 58A00

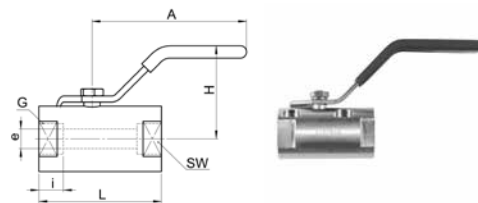

Type -G	Mat.-Nr.	bar	SW	L	A	H	i	e	kv	kg/100
G=Rohrgewinde (zylindrisch)		G=Filetage-gaz BSP (cylindrique)		G=BSP thread (parallel)						
SO BV 58A00-1/4	068.8041.040	55	26	59.5	115.0	54.0	10.0	8.0	70.0	34.000
SO BV 58A00-3/8	068.8041.060	55	27	59.5	115.0	60.0	12.0	9.6	100.0	33.500
SO BV 58A00-1/2	068.8041.080	55	27	59.5	105.0	60.0	12.0	9.6	100.0	31.000
SO BV 58A00-3/4	068.8041.120	55	34	67.0	105.0	64.0	14.0	12.5	100.0	45.400
SO BV 58A00-1	068.8041.160	55	41	76.0	105.0	64.0	14.0	16.5	100.0	68.000

Spezifikationen

Betriebsdruck (PN): 55 bar
 Sicherheitsfaktor: 1.5-fach
 Temperatur: -40°C bis +200°C

Materialien

Ventilkörper, Kugel, Spindel: Edelstahl 1.4436 (AISI 316)
 Griff: Edelstahl 1.4301 (AISI 304) mit PVC-Überzug
 Dichtungen: PTFE

Dienstleistungsoptionen auf Anfrage

Spécifications

Pression de service (PN): 55 bar
 Facteur de sécurité: 1.5 fois
 Température: -40°C à +200°C

Matériaux

Corps, bille, pointeau: acier inoxydable 1.4436 (AISI 316)
 Manette: acier inoxydable 1.4301 (AISI 304), couche en PVC
 Joints: PTFE

Options de service sur demande

Specifications

Working pressure (PN): 55 bar
 Safety factor: 1.5 times
 Temperature: -40°C to +200°C

Materials

Valve body, ball, spindle: stainless steel 1.4436 (AISI 316)
 Handle: stainless steel 1.4301 (AISI 304) with PVC cover
 Seals: PTFE

Optional services on request