


Übergangsnippel G-NPT

Adaptateur femelle G - mâle NPT

Adaptor female G - male NPT

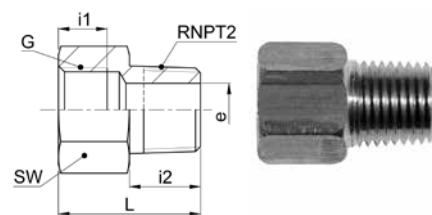


AD A 40 G-NPT

Type -G -RNPT2	Mat.-Nr.	SW	L	i1	i2	e	kg/100
G=Rohrgewinde (zylindrisch)	G=Filetage-gaz BSP (cylindrique)			G=BSP thread (parallel)			
RNPT2=NPT Gewinde	RNPT2=Filetage NPT			RNPT2=NPT thread			
AD A 40-1/8-1/8 NPT	016.0412.042	14	23.0	8.0	10.0	6.0	2.300
AD A 40-1/8-1/4 NPT	016.0412.044	14	20.0	8.0	14.0	8.6	1.200
AD A 40-1/4-1/8 NPT	016.0412.102	17	24.5	9.0	10.0	6.0	3.000
AD A 40-1/4-1/4 NPT	016.0412.104	17	26.5	9.0	14.0	8.5	3.900
AD A 40-1/4-3/8 NPT	016.0412.106	17	21.0	9.0	14.0	10.5	2.800
AD A 40-1/4-1/2 NPT	016.0412.108	22	27.0	9.0	19.0	11.4	7.700
AD A 40-3/8-1/4 NPT	016.0412.164	22	29.5	9.5	14.0	8.5	5.900
AD A 40-3/8-3/8 NPT	016.0412.166	22	29.5	9.5	14.0	10.5	6.800
AD A 40-3/8-1/2 NPT	016.0412.168	22	27.0	9.5	19.0	14.0	5.400
AD A 40-3/8-3/4 NPT	016.0412.170	27	29.0	9.5	20.0	15.0	12.800
AD A 40-1/2-1/4 NPT	016.0412.224	27	32.0	11.5	14.0	8.5	6.900
AD A 40-1/2-3/8 NPT	016.0412.226	27	32.0	11.5	14.0	10.5	7.100
AD A 40-1/2-1/2 NPT	016.0412.228	27	37.5	11.5	19.0	14.0	11.100
AD A 40-1/2-3/4 NPT	016.0412.232	27	31.0	11.5	20.0	18.6	8.900
AD A 40-3/4-3/4 NPT	016.0412.292	32	41.5	14.0	20.0	19.0	17.200
AD A 40-3/4-1 NPT	016.0412.296	36	33.0	14.0	25.0	24.1	16.500
AD A 40-1-1 NPT	016.0412.414	41	45.0	17.0	25.0	23.0	21.600

Übergangsnippel NPT-R

Adaptateur femelle NPT - mâle R

Adaptor female NPT - male R

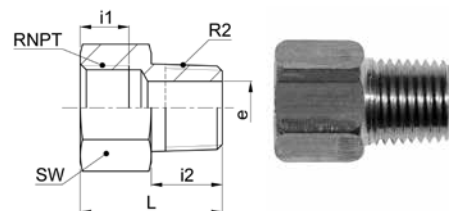

AD A 40 NPT-R

Type -RNPT -R2	Mat.-Nr.	SW	L	i1	i2	e	kg/100
RNPT=NPT Gewinde	RNPT=Filetage NPT			RNPT=NPT thread			
R2=Rohrgewinde (kegelig)	R2=Filetage-gaz BSP (conique)			R2=BSP thread (tapered)			
AD A 40-1/8 NPT-1/8	016.0414.042	14	21.0	10.0	8.0	6.0	1.470
AD A 40-1/8 NPT-1/4	016.0414.044	14	18.0	10.0	12.0	8.1	1.130
AD A 40-1/4 NPT-1/4	016.0414.104	17	29.0	14.0	12.0	8.5	2.740
AD A 40-1/4 NPT-3/8	016.0414.106	17	22.0	14.0	12.0	10.5	1.650
AD A 40-1/2 NPT-1/2	016.0414.228	27	38.0	18.0	16.0	14.0	8.310