


Tülle mit Schottbefestigung reduziert

Douille traversée de cloison réduite

Panel mount hose nozzle reduced

LO CV 1500 RED

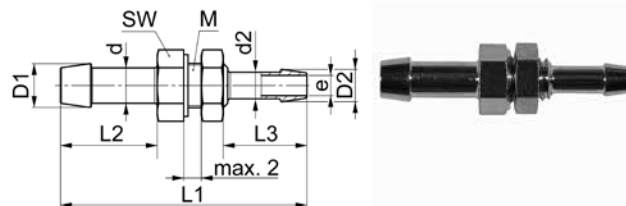


Type -d -d2	Mat.-Nr.	M	SW	L1	L2	L3	D1	D2	e	kg/100
LO CV 1500-2-1,5	366.1504.013	M5	7	21.0	7.0	6.0	2.5	2.0	1.0	0.240
LO CV 1500-3-1,5	366.1504.014	M5	7	23.0	9.0	6.0	3.7	2.0	1.0	0.240
LO CV 1500-4-1,5	366.1504.028	M5	7	25.0	11.0	6.0	5.0	2.0	1.0	0.250
LO CV 1500-4-2	366.1504.030	M5	7	26.0	11.0	7.0	5.0	2.5	1.4	0.260
LO CV 1500-4-2,5	366.1504.035	M5	7	27.0	11.0	8.0	5.0	3.0	1.9	0.270
LO CV 1500-4-3	366.1504.040	M5	7	28.0	11.0	9.0	5.0	3.7	2.3	0.290

Einschraubtülle

Douille cannelée à visser

Male adaptor hose nozzle

LO CV 1100

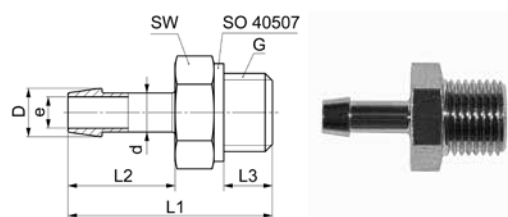

Type -d -G	Mat.-Nr.	SW	L1	L2	L3	D	e	kg/100
G=Rohrgewinde (zylindrisch)	G=Filetage-gaz BSP (cylindrique)	G=BSP thread (parallel)						
LO CV 1100-1,5-1/8	366.1141.009	12	18.0	6.0	8.0	2.0	1.0	0.640
LO CV 1100-2-1/8	366.1141.020	12	19.0	7.0	8.0	2.5	1.4	0.840
LO CV 1100-2,5-1/8	366.1141.030	12	20.0	8.0	8.0	3.0	1.9	0.775
LO CV 1100-3-1/8	366.1141.040	12	23.0	9.0	8.0	3.7	2.3	0.825
LO CV 1100-4-1/8	366.1141.060	12	23.0	11.0	8.0	5.0	3.2	0.810

Die entsprechende Dichtung SO 40507 ist separat zu bestellen.

Le joint correspondant SO 40507 doit être commandé séparément.

The relevant washer SO 40507 must be ordered separately.