

692PU-No-Skive

Compact hose with
1 or 2 steel wire braids
as single or twin hose

Main applications

Material handling industry, where tight bend radii, flexibility, ozone, abrasion and shock resistance are needed and required. Ideal for over-the-sheave or reel applications.

Applicable Specifications

Parker specification – constant working pressure

Hose construction

Inner tube: Nitrile (NBR)


Reinforcement: One or two braids of high-tensile steel wire

Cover: Premium-quality polyurethane

Temperature range -45 °C to +100 °C

Exceptions: Air up to +70 °C

Water up to +85 °C

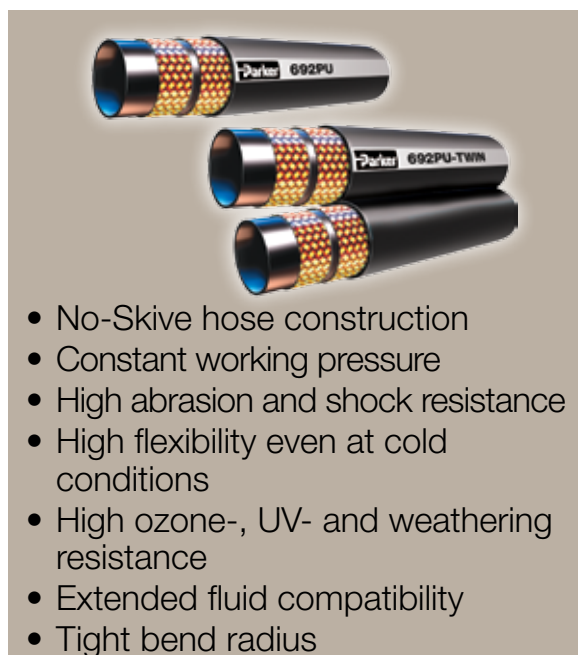

Recommended media







Hydraulic fluids on a mineral-oil basis, water-glycol and lubricating oils, air and water. For air and gas applications with a pressure exceeding 1.7 MPa, the cover must be pin-pricked. For further information, please refer to “Chemical Resistance” in Catalogue C4400, pages **Ab-24** to **Ab-32**.

Fitting Series

Size -4 up to -6

Size -8 up to -10



Part Number	 Hose I.D.				 Hose O.D.	Pressure Rating				 min. bend radius	 weight	
	DN	Inch	Size	mm	mm	 max. working pressure			 min. burst pressure			
	MPa	psi	MPa	psi	mm	kg						
Single hose												
692PU-4	6	1/4	4	6.4	11.5	21.0	3045	84.0	12180	40	0.18	
692PU-5	8	5/16	5	7.9	13.6	21.0	3045	84.0	12180	40	0.21	
692PU-6	10	3/8	6	9.5	15.5	21.0	3045	84.0	12180	40	0.25	
692PU-8	12	1/2	8	12.7	20.4	21.0	3045	84.0	12180	50	0.52	
692PU-10	16	5/8	10	15.9	23.9	21.0	3045	84.0	12180	60	0.66	
Twin hose												
692PU-4-4	6	1/4	4	6.4	24.0	21.0	3045	84.0	12180	40	0.36	
692PU-5-5	8	5/16	5	7.9	27.4	21.0	3045	84.0	12180	40	0.42	
692PU-6-6	10	3/8	6	9.5	31.2	21.0	3045	84.0	12180	40	0.50	
692PU-8-8	12	1/2	8	12.7	41.5	21.0	3045	84.0	12180	50	1.00	
692PU-10-10	16	5/8	10	15.9	48.7	21.0	3045	84.0	12180	60	1.35	

The combination of high temperature and high pressure can reduce the service life of the hose.

Hose layline (examples for single and twin hose)

PARKER 692PU-6 WP 21,0 MPa (3046 psi) | • • 10 mm (3/8 “)

21.0 MPa