


GMA3 Straight Test Point with threaded connection M 16×2

Series 3

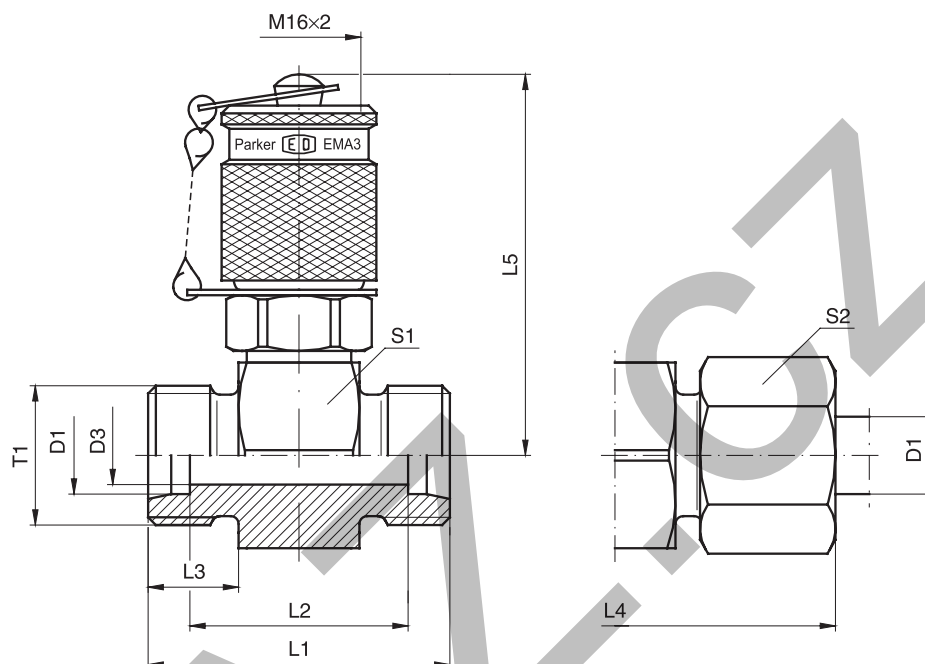

| Series | D1 | T1 | D3 | L1 | L2 | L3 | L4 | L5 | S1 | S2 | Weight g/1 piece | Order code* | PN (bar) ¹⁾ | | DF** | |
|-----------------|----|----------|----|----|----|----|----|------|----|----|---------------------|-------------|------------------------|-----|------|----|
| | | | | | | | | | | | | | CF | 71 | CF | 71 |
| L ³⁾ | 06 | M 12×1.5 | 4 | 35 | 21 | 10 | 51 | 49.0 | 24 | 14 | 126 | GMA3/06LOMD | 315 | 315 | 4 | 4 |
| | 08 | M 14×1.5 | 6 | 35 | 21 | 10 | 51 | 49.0 | 24 | 17 | 128 | GMA3/08LOMD | 315 | 315 | 4 | 4 |
| | 10 | M 16×1.5 | 7 | 37 | 23 | 11 | 53 | 49.0 | 24 | 19 | 132 | GMA3/10LOMD | 315 | 315 | 4 | 4 |
| | 12 | M 18×1.5 | 8 | 37 | 23 | 11 | 53 | 50.5 | 27 | 22 | 145 | GMA3/12LOMD | 315 | 315 | 4 | 4 |
| | 15 | M 22×1.5 | 11 | 39 | 25 | 12 | 55 | 52.0 | 30 | 27 | 174 | GMA3/15LOMD | 315 | 315 | 4 | 4 |
| | 18 | M 26×1.5 | 14 | 39 | 24 | 12 | 57 | 53.0 | 32 | 32 | 192 | GMA3/18LOMD | 315 | 315 | 4 | 4 |
| | 22 | M 30×2.0 | 18 | 43 | 28 | 14 | 61 | 55.0 | 36 | 36 | 220 | GMA3/22LOMD | 160 | 160 | 4 | 4 |
| | 28 | M 36×2.0 | 23 | 43 | 28 | 14 | 61 | 57.5 | 41 | 41 | 259 | GMA3/28LOMD | 160 | 160 | 4 | 4 |
| | 35 | M 45×2.0 | 30 | 47 | 26 | 16 | 69 | 60.0 | 46 | 50 | 363 | GMA3/35LOMD | 160 | 160 | 4 | 4 |
| | 42 | M 52×2.0 | 36 | 47 | 25 | 16 | 71 | 64.5 | 55 | 60 | 419 | GMA3/42LOMD | 160 | 160 | 4 | 4 |
| S ⁴⁾ | 06 | M 14×1.5 | 4 | 39 | 25 | 12 | 55 | 49.0 | 24 | 17 | 137 | GMA3/06SOMD | 630 | 630 | 4 | 4 |
| | 08 | M 16×1.5 | 5 | 39 | 25 | 12 | 55 | 49.0 | 24 | 19 | 141 | GMA3/08SOMD | 630 | 630 | 4 | 4 |
| | 10 | M 18×1.5 | 7 | 39 | 24 | 12 | 57 | 49.0 | 24 | 22 | 141 | GMA3/10SOMD | 630 | 630 | 4 | 4 |
| | 12 | M 20×1.5 | 7 | 39 | 24 | 12 | 57 | 49.0 | 24 | 24 | 150 | GMA3/12SOMD | 630 | 630 | 4 | 4 |
| | 14 | M 22×1.5 | 10 | 43 | 27 | 14 | 63 | 50.5 | 27 | 27 | 172 | GMA3/14SOMD | 630 | 630 | 4 | 4 |
| | 16 | M 24×1.5 | 11 | 43 | 26 | 14 | 63 | 52.0 | 30 | 30 | 195 | GMA3/16SOMD | 400 | 400 | 4 | 4 |
| | 20 | M 30×2.0 | 15 | 47 | 26 | 16 | 69 | 55.0 | 36 | 36 | 254 | GMA3/20SOMD | 400 | 400 | 4 | 4 |
| | 25 | M 36×2.0 | 20 | 51 | 27 | 18 | 75 | 57.5 | 41 | 46 | 329 | GMA3/25SOMD | 400 | 400 | 4 | 4 |
| | 30 | M 42×2.0 | 25 | 55 | 28 | 20 | 81 | 60.0 | 46 | 50 | 412 | GMA3/30SOMD | 400 | 400 | 4 | 4 |
| | 38 | M 52×2.0 | 32 | 61 | 29 | 22 | 91 | 64.5 | 55 | 60 | 616 | GMA3/38SOMD | 315 | 315 | 4 | 4 |

**DF = Design Factor

¹⁾Pressure shown = item deliverable³⁾L = light series; ⁴⁾S = heavy series

$$\frac{\text{PN (bar)}}{10} = \text{PN (MPa)}$$

Delivery without nut and ring.

Information on ordering complete fittings or alternative sealing materials see page 17.

*Please add the suffixes below according to the material/surface required.

| Order code suffixes | | | |
|---------------------|-----------------------------|---------------|---|
| Material | Suffix surface and material | Example | Standard sealing material (no additional suffix needed) |
| Steel | CF | GMA3/06LOMDCF | NBR |
| Stainless Steel | 71 | GMA3/06LOMD71 | VIT |