

Model No.

T6CM - B22 - 1 R 00 - C 1

Series M = Mobile 1 shaft seal

Cam ring

(Delivery at 0 bar & 1500 r.p.m.)

B03 = 16,2 l/min B17 = 87,4 l/min

B05 = 25,8 l/min B20 = 95,7 l/min

B06 = 31,9 l/min B22 = 105,4 l/min

B08 = 39,6 l/min B25 = 118,9 l/min

B10 = 51,1 l/min B28 = 133,2 l/min

B12 = 55,6 l/min B31 = 150,0 l/min

B14 = 69,0 l/min

Type of shaft

1 = keyed (SAE B)

2 = keyed (no SAE)

3 = splined (SAE B)

4 = splined (SAE BB)

Modification

Seal class

1 = S1 (for mineral oil)

4 = S4 (for the resistant fluids)

5 = S5 (for mineral oil and fire resistant fluids)

Design letter

Porting combination

00 = standard


Direct. of rotation (view on shaft end)

R = clockwise


L = counter-clockwise

P = Pressure port


S = Suction port

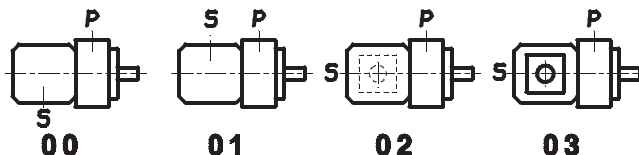


INTERNAL LEAKAGE (TYPICAL)

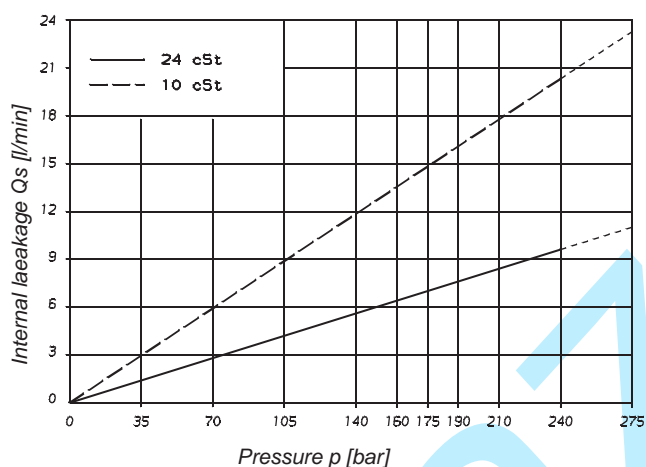


Do not operate the pump more than 5 seconds at any speed or viscosity if internal leakage is more than 50 % of theoretical flow.

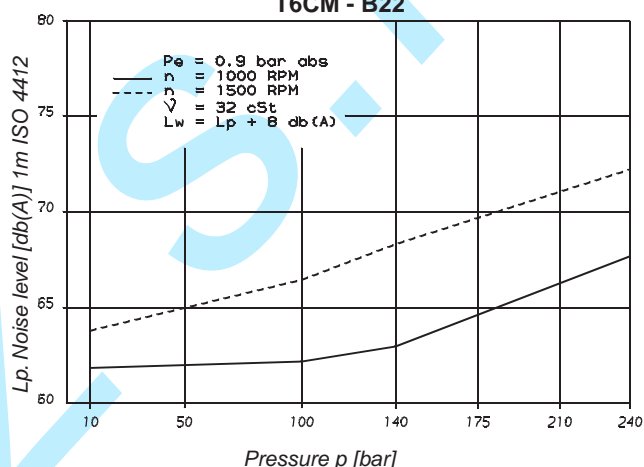
NOISE LEVEL (TYPICAL)
T6CM - B22

POWER LOSS HYDROMECHANICAL (TYPICAL)

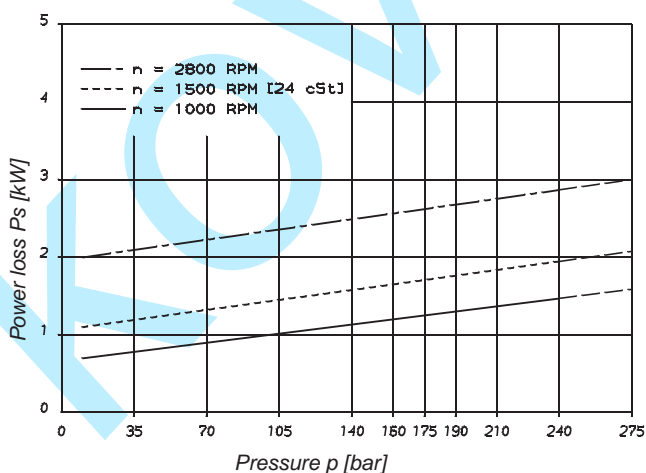

PERMISSIBLE RADIAL LOAD

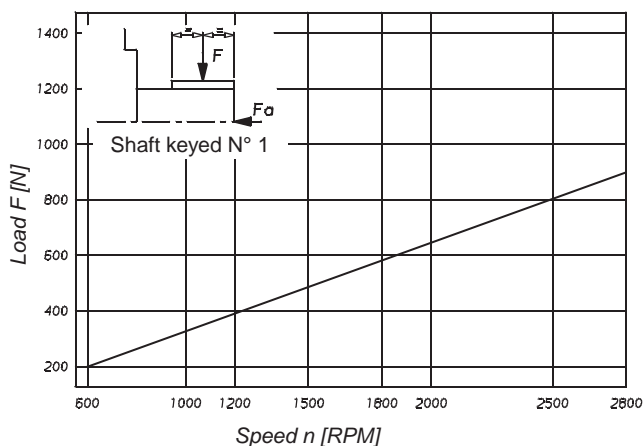Maximum permissible axial load $F_a = 800 \text{ N}$

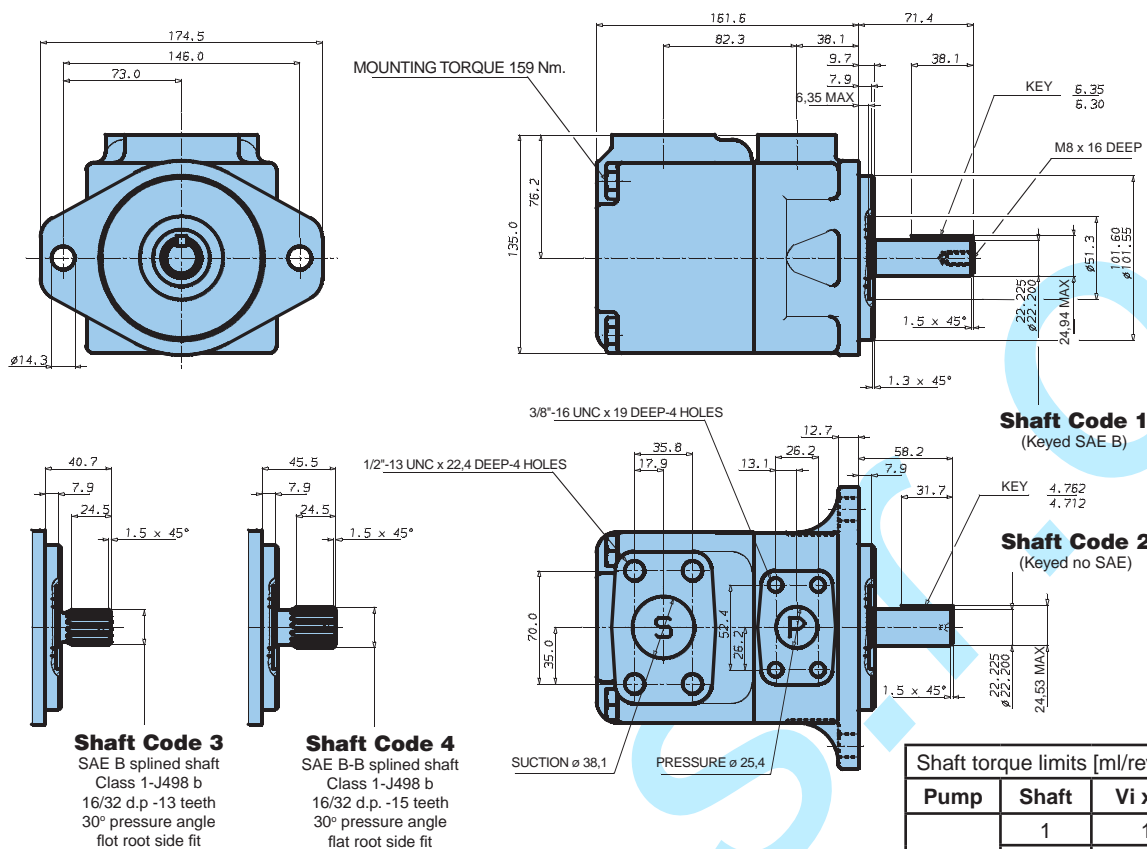

OPERATING CHARACTERISTICS - TYPICAL [24 cSt]

Series	Volumetric Displacement Vi	Speed n [R.P.M.]	Flow Q [l/min]			Input power P [kW]		
			p = 0 bar	p = 140 bar	p = 240 bar	p = 7 bar	p = 140 bar	p = 240 bar
B03	10,8 ml/rev	1000 1500	10,8 16,2	- 10,7	- -	1,0 1,3	- 5,3	- -
B05	17,2 ml/rev	1000 1500	17,2 25,8	11,7 20,3	15,8 -	1,1 1,4	5,1 7,5	- 12,2
B06	21,3 ml/rev	1000 1500	21,3 31,9	15,8 26,5	11,3 22,0	1,1 1,5	6,0 8,9	10,0 14,7
B08	26,4 ml/rev	1000 1500	26,4 39,6	20,9 34,1	16,4 29,6	1,2 1,6	7,2 10,7	12,1 17,7
B10	34,1 ml/rev	1000 1500	34,1 51,1	28,6 45,7	24,1 41,2	1,3 1,7	8,9 13,4	15,1 22,3
B12	37,1 ml/rev	1000 1500	37,1 55,6	31,6 50,2	27,1 45,7	1,3 1,7	9,6 14,4	16,3 24,1
B14	46,0 ml/rev	1000 1500	46,0 69,0	40,5 63,5	36,0 59,0	1,4 1,9	11,7 17,6	19,9 29,5
B17	58,3 ml/rev	1000 1500	58,3 87,4	52,8 82,0	48,3 77,5	1,6 2,1	14,5 21,9	24,8 36,9
B20	63,8 ml/rev	1000 1500	63,8 95,7	58,3 90,2	53,8 85,7	1,6 2,2	15,8 23,8	27,0 40,2
B22	70,3 ml/rev	1000 1500	70,3 105,4	64,8 100,0	60,3 95,5	1,7 2,3	17,3 26,1	29,6 44,1
B25 ¹⁾	79,3 ml/rev	1000 1500	79,3 118,9	73,8 113,5	69,3 109,0	1,8 2,5	19,3 29,2	33,2 49,5
B28 ¹⁾	88,8 ml/rev	1000 1500	88,8 133,2	83,3 127,7	80,1 ²⁾ 124,5 ²⁾	1,9 2,8	21,9 32,7	32,5 ²⁾ 48,5 ²⁾
B31 ¹⁾	100,0 ml/rev	1000 1500	100,0 150,0	94,5 144,5	91,3 ²⁾ 141,3 ²⁾	2,0 2,8	24,4 36,5	36,4 ²⁾ 54,4 ²⁾

¹⁾ B25 - B28 - B31 = 2500 R.P.M. max.

²⁾ B28 - B31 = 210 bar max. int.

- Not to use because internal leakage greater than 50% theoretical flow.

Port connection can be furnished with metric threads

Model No.

Series P = Mobile 2 shaft seals

Cam ring
(Delivery at 0 bar & 1500 r.p.m.)
B14 = 69,0 l/min B25 = 118,9 l/min
B17 = 87,4 l/min B28 = 133,2 l/min
B20 = 95,7 l/min B31 = 150,0 l/min
B22 = 105,4 l/min

Type of shaft
2 = keyed (no SAE)
3 = splined (SAE C)

T6CP - B22 - 2 R 00 - A 1


Modification

Seal class
1 = S1 (for mineral oil)
4 = S4 (for the resistant fluids)
5 = S5 (for mineral oil and fire resistant fluids)


Design letter

Porting combination
00 = standard

Direct. of rotation (view on shaft end)
R = clockwise
L = counter-clockwise

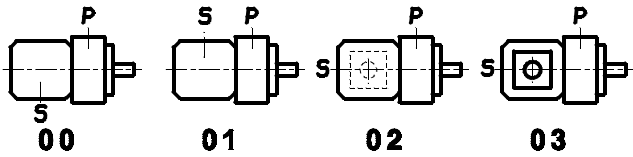


INTERNAL LEAKAGE (TYPICAL)

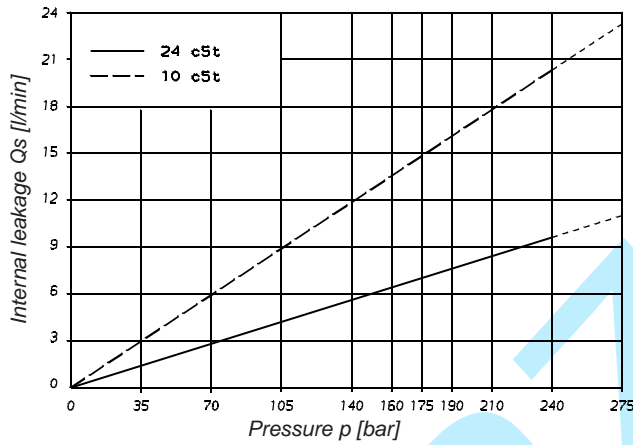


Do not operate the pump more than 5 seconds at any speed or viscosity if internal leakage is more than 50 % of theoretical flow.


NOISE LEVEL (TYPICAL)
T6CP - B22

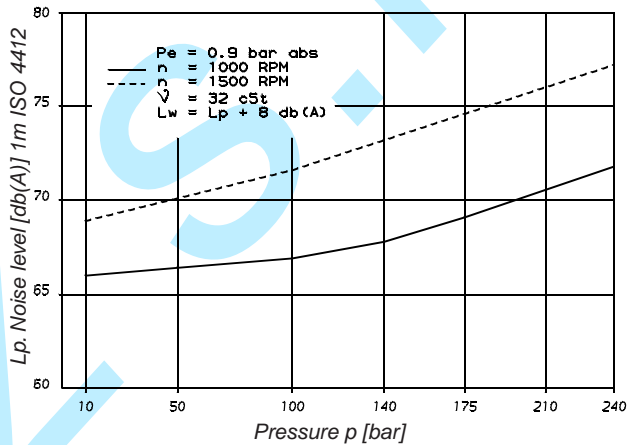


POWER LOSS HYDROMECHANICAL (TYPICAL)

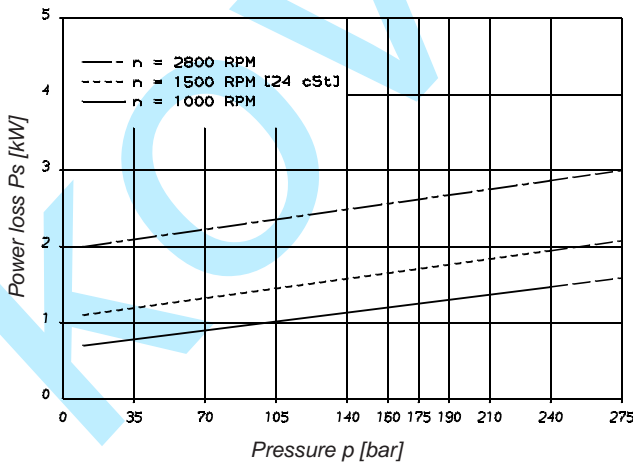

PERMISSIBLE RADIAL LOAD

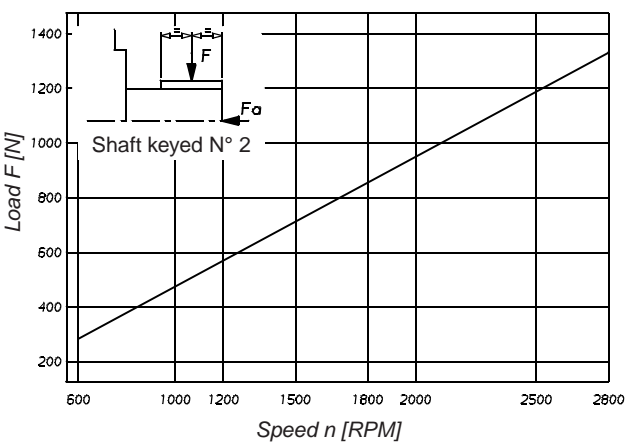

Maximum permissible axial load Fa = 800 N

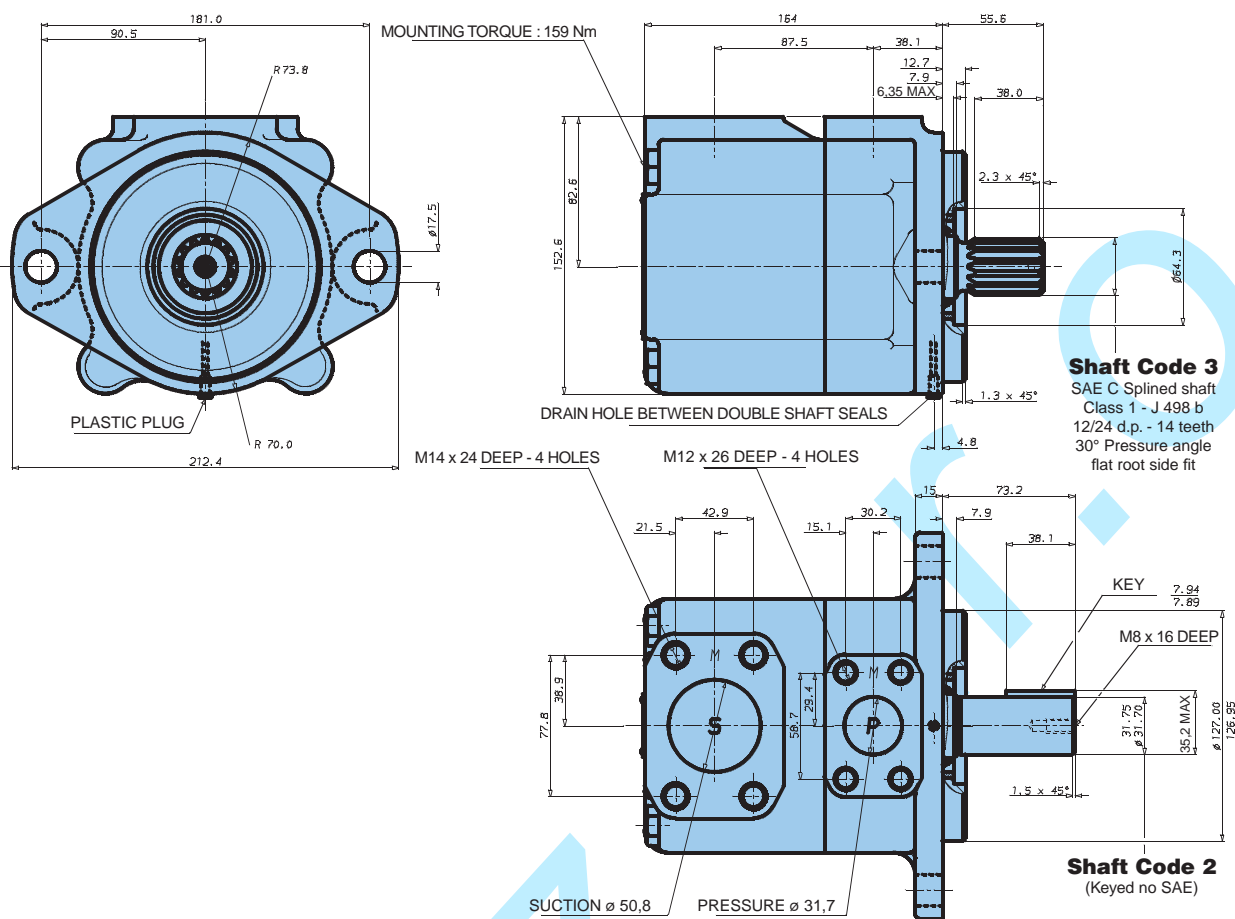

OPERATING CHARACTERISTICS - TYPICAL [24 cSt]

Series	Volumetric Displacement Vi	Speed n [R.P.M.]	Flow Q [l/min]			Input power P [kW]		
			p = 0 bar	p = 140 bar	p = 240 bar	p = 7 bar	p = 140 bar	p = 240 bar
B14	46,0 ml/rev	1000	46,0	40,5	36,0	1,4	11,7	19,9
		1500	69,0	63,5	59,0	1,9	17,6	29,5
B17	58,3 ml/rev	1000	58,3	52,8	48,3	1,6	14,5	24,8
		1500	87,4	82,0	77,5	2,1	21,9	36,9
B20	63,8 ml/rev	1000	63,8	58,3	53,8	1,6	15,8	27,0
		1500	95,7	90,2	85,7	2,2	23,8	40,2
B22	70,3 ml/rev	1000	70,3	64,8	60,3	1,7	17,3	29,6
		1500	105,4	100,0	95,5	2,3	26,1	44,1
B25 ¹⁾	79,3 ml/rev	1000	79,3	73,8	69,3	1,8	19,3	33,2
		1500	118,9	113,5	109,0	2,5	29,2	49,5
B28 ¹⁾	88,8 ml/rev	1000	88,8	83,3	80,1 ²⁾	1,9	21,9	32,5 ²⁾
		1500	133,2	127,7	124,5 ²⁾	2,8	32,7	48,5 ²⁾
B31 ¹⁾	100,0 ml/rev	1000	100,0	94,5	91,3 ²⁾	2,0	24,4	36,4 ²⁾
		1500	150,0	144,5	141,3 ²⁾	2,8	36,5	54,4 ²⁾

¹⁾ B25 - B28 - B31 = 2500 R.P.M. max.²⁾ $B28 - B31 = 210 \text{ bar max. int.}$

Model No.

T6D* - B45 - 1 R 00 - C 1

Series M = Mobile 1 shaft seal
Series P = Mobile 2 shaft seals

Cam ring

(Delivery at 0 bar & 1500 r.p.m.)

B14 = 71,4 l/min

B35 = 166,5 l/min

B17 = 87,3 l/min

B38 = 180,4 l/min

B20 = 99,0 l/min

B42 = 204,0 l/min

B24 = 119,3 l/min

B45 = 218,5 l/min

B28 = 134,5 l/min

B50 = 237,0 l/min

B31 = 147,4 l/min

Type of shaft

M version

1 = keyed (SAE C)

2 = keyed (no SAE)

3 = splined (SAE C)

4 = splined (no SAE)

T = splined (SAE J718c)

Type of shaft

P version

3 = splined (no SAE)

Modification

Seal class

1 = S1 (for mineral oil)

4 = S4 (for the resistant fluids)

5 = S5 (for mineral oil and fire resistant fluids)

Design letter


Porting combination

00 = standard

Direct. of rotation (view on shaft end)

R = clockwise


L = counter-clockwise

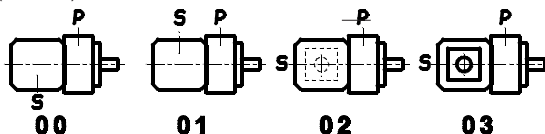

P = Pressure port


S = Suction port

INTERNAL LEAKAGE (TYPICAL)

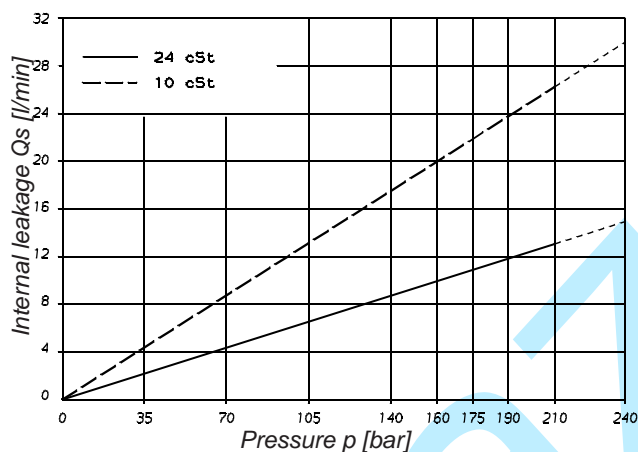


NOISE LEVEL (TYPICAL)


T6DM - B38

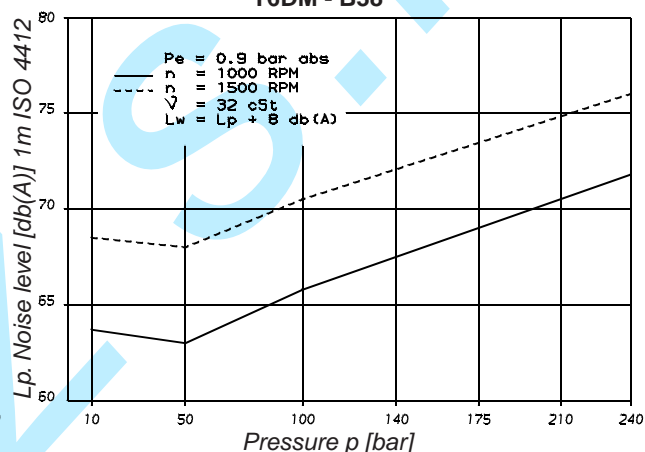


POWER LOSS HYDROMECHANICAL (TYPICAL)

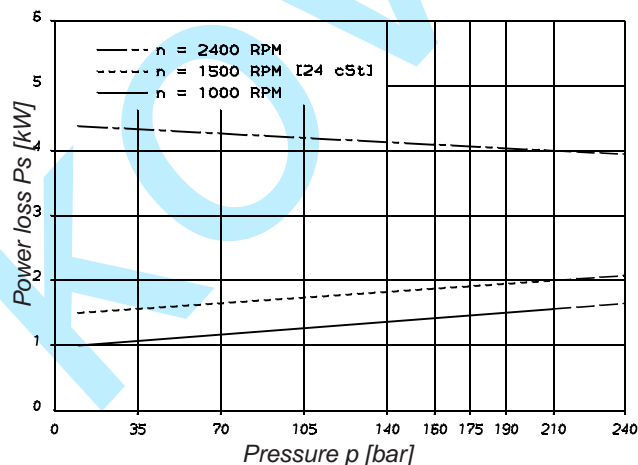

PERMISSIBLE RADIAL LOAD

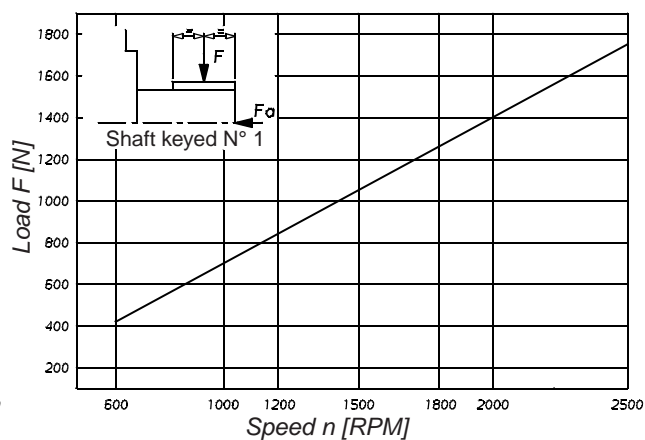

Maximum permissible axial load Fa = 1200 N

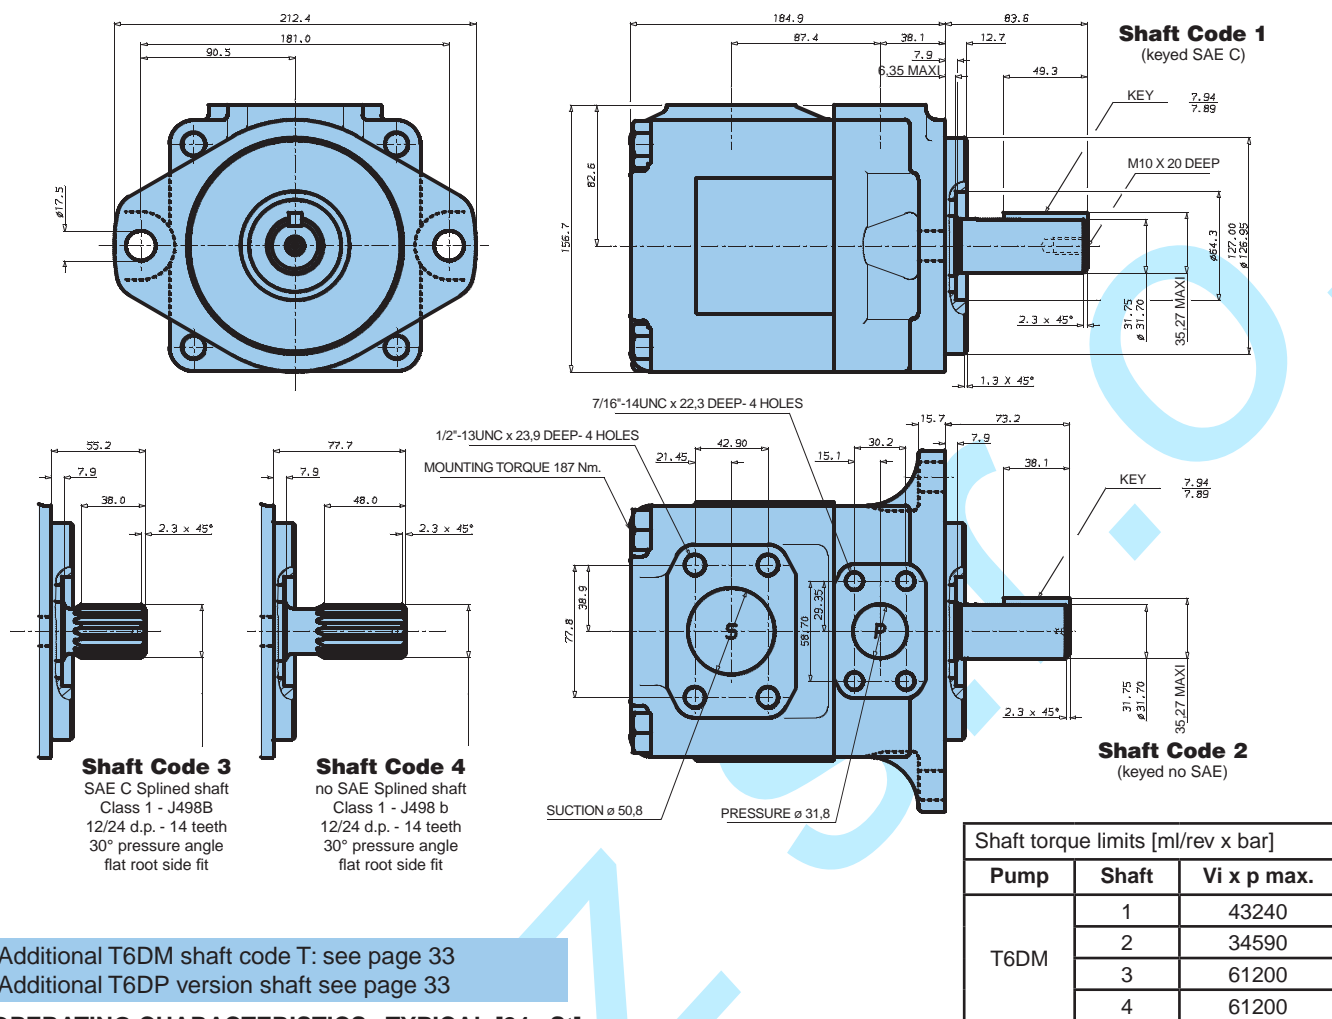

OPERATING CHARACTERISTICS - TYPICAL [24 cSt]

Series	Volumetric Displacement Vi	Speed n [R.P.M.]	Flow Q [l/min]			Input power P [kW]		
			p = 0 bar	p = 140 bar	p = 240 bar	p = 7 bar	p = 140 bar	p = 240 bar
B14	47.6 ml/rev	1000 1500	47.6 71.4	38.3 62.1	32.1 55.9	1.5 2.3	12.5 18.5	20.7 30.6
B17	58.2 ml/rev	1000 1500	58.2 87.3	48.9 78.0	42.7 71.8	1.6 2.5	14.9 22.2	24.9 37.0
B20	66.0 ml/rev	1000 1500	66.0 99.0	56.7 89.7	50.5 83.5	1.7 2.8	16.8 24.9	28.0 41.7
B24	79.5 ml/rev	1000 1500	79.5 119.3	70.2 110.0	64.0 103.8	1.9 3.0	19.9 29.6	33.4 49.8
B28	89.7 ml/rev	1000 1500	89.7 134.5	80.4 125.2	74.2 119.0	2.0 3.2	22.3 33.2	37.5 55.9
B31	98.3 ml/rev	1000 1500	98.3 147.4	89.0 138.1	82.8 131.9	2.1 3.3	24.3 36.2	40.9 61.0
B35	111.0 ml/rev	1000 1500	111.0 166.5	101.7 157.2	95.5 151.0	2.3 3.5	27.3 40.7	46.0 68.7
B38	120.3 ml/rev	1000 1500	120.3 180.4	111.0 171.1	104.8 164.9	2.4 3.7	29.4 43.9	49.8 74.3
B42 ¹⁾	136.0 ml/rev	1000 1500	136.0 204.0	126.7 194.7	120.5 188.5	2.6 4.0	33.1 49.4	56.0 83.7
B45 ¹⁾	145.7 ml/rev	1000 1500	145.7 218.5	136.4 209.2	130.2 203.0	2.7 4.1	35.3 52.8	59.9 89.5
B50 ¹⁾	158.0 ml/rev	1000 1500	158.0 237.0	148.7 227.7	145.0 ²⁾ 224.0 ²⁾	2.8 4.4	38.2 57.0	56.8 ²⁾ 85.0 ²⁾

¹⁾ B42 - B45 - B50 = 2200 R.P.M. max.

²⁾ B50 = 210 bar max. int.

Port connection can be furnished with metric threads.

Model No.

T6E* - 066 - 3 R 00 - B 1

Series M = Mobile 1 shaft seal
Series P = Mobile 2 shaft seals

Cam ring

(Delivery at 0 bar & 1500 r.p.m.)

042 = 198,5 l/min

062 = 295,0 l/min

045 = 213,6 l/min

066 = 319,9 l/min

050 = 237,7 l/min

072 = 340,6 l/min

052 = 247,2 l/min

Type of shaft

Type of shaft

M version

1 = keyed (SAE CC)

2 = keyed (no SAE)


3 = splined (SAE C)

4 = splined (SAE CC)



T = splined (SAE J718c)

P version


3 = splined (no SAE)




INTERNAL LEAKAGE (TYPICAL)

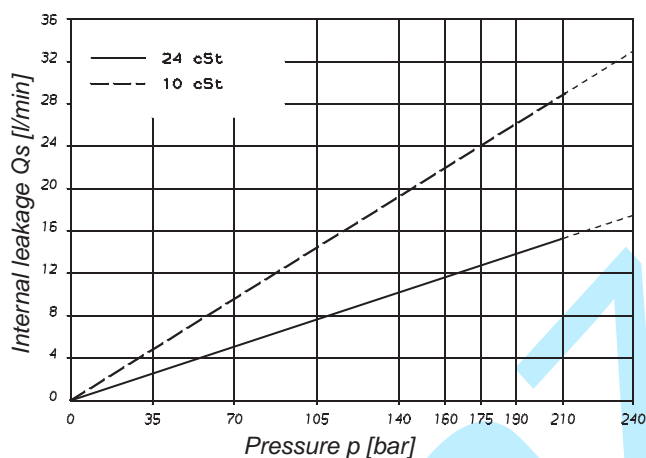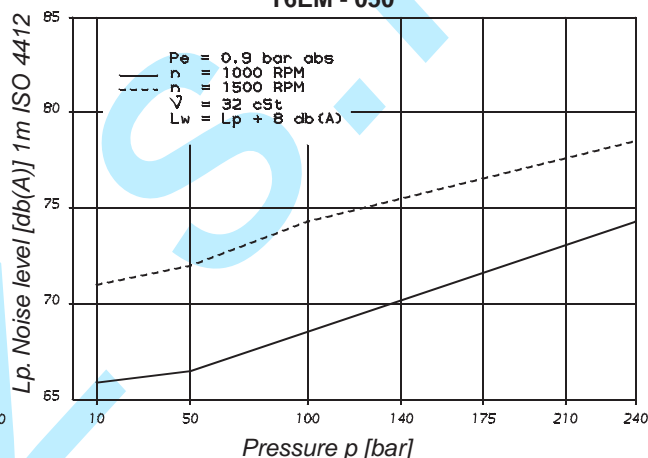NOISE LEVEL (TYPICAL)
T6EM - 050


POWER LOSS HYDROMECHANICAL (TYPICAL)

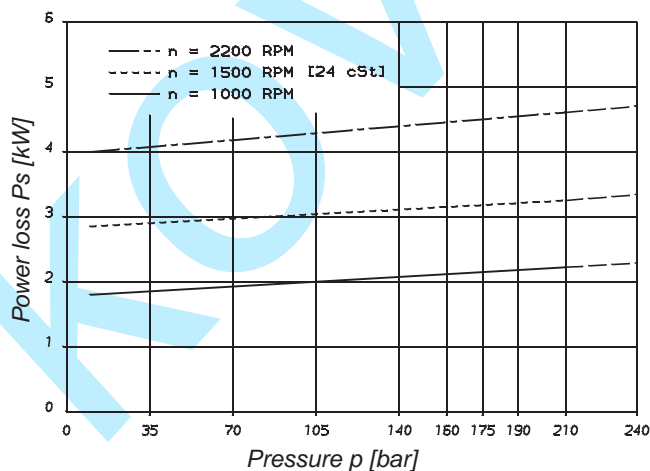

PERMISSIBLE RADIAL LOAD

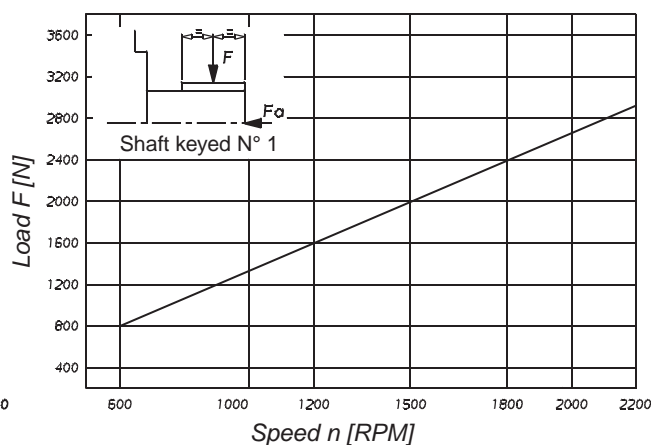

Maximum permissible axial load Fa = 2000 N

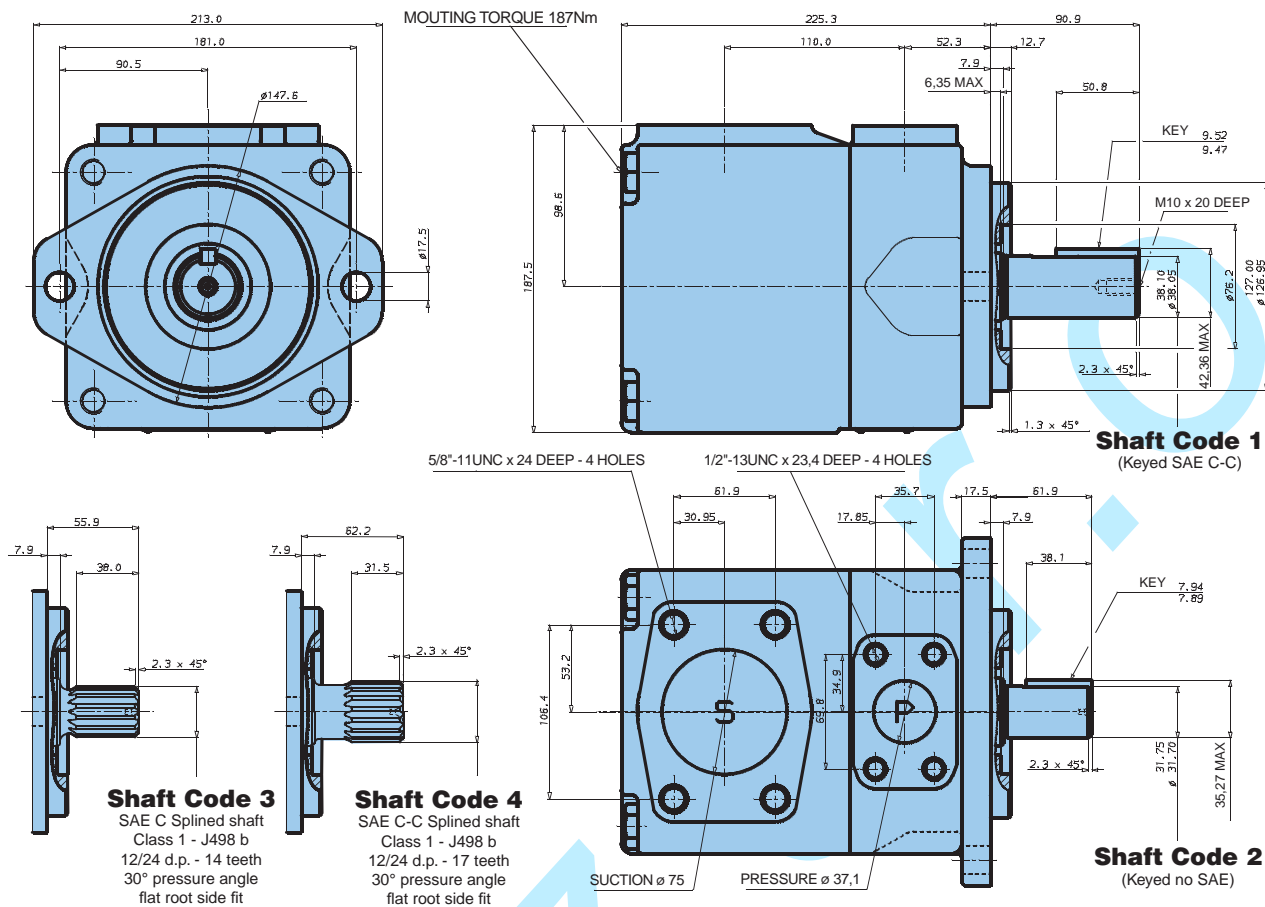

Additional T6EM shaft code T: see page 33
Additional T6EP version shaft see page 33

Shaft torque limits [ml/rev x bar]		
Pump	Shaft	Vi x p max.
T6EM	1	54500
	2	34590
	3	61200
	4	61200

OPERATING CHARACTERISTICS - TYPICAL [24 cSt]

Series	Volumetric Displacement Vi	Speed n [R.P.M.]	Flow Q [l/min]			Input power P [kW]		
			p = 0 bar	p = 140 bar	p = 240 bar	p = 7 bar	p = 140 bar	p = 240 bar
042	132,3 ml/rev	1000	132,3	122,3	115,2	3,2	32,9	55,2
		1500	198,5	188,5	181,3	5,2	49,4	82,6
045	142,4 ml/rev	1000	142,4	132,4	125,3	3,4	35,3	59,2
		1500	213,6	203,6	196,5	5,4	52,9	88,7
050	158,5 ml/rev	1000	158,5	148,5	141,4	3,5	39,0	65,6
		1500	237,7	227,7	220,6	5,7	58,5	98,3
052	164,8 ml/rev	1000	164,8	154,8	147,7	3,6	40,5	68,2
		1500	247,2	237,2	230,1	5,8	60,8	102,1
062	196,7 ml/rev	1000	196,7	186,7	179,6	4,0	47,9	80,9
		1500	295,0	285,0	277,9	6,4	71,9	121,3
066	213,3 ml/rev	1000	213,3	203,3	196,2	4,2	51,8	87,6
		1500	319,9	309,9	302,8	6,7	77,7	131,2
072	227,1 ml/rev	1000	227,1	217,1	210,0	4,3	55,0	93,1
		1500	340,6	330,6	323,5	6,9	82,6	139,5

Port connection can be furnished with metric threads.

Model No.

T6CC* W - B22 - B08 - 1 R 00 - D 1 - 00

Series M = Mobile 1 shaft seal

Series P = Mobile 2 shaft seals

Use for severe duty shaft only*

Cam ring for "P1" & "P2"

(Delivery at 0 bar & 1500 r.p.m.)

B03 = 16,2 l/min B17 = 87,4 l/min

B05 = 25,8 l/min B20 = 95,7 l/min

B06 = 31,9 l/min B22 = 105,4 l/min

B08 = 39,6 l/min B25 = 118,9 l/min

B10 = 51,1 l/min B28 = 133,2 l/min

B12 = 55,6 l/min B31 = 150,0 l/min

B14 = 69,0 l/min

Type of shaft

M version

1 = keyed (no SAE)

3 = splined (SAE BB)

5 = splined (SAE B)

P version

3 = splined (no SAE)

4 = splined (SAE BB)

6 = splined (no SAE)

Type of shaft

MW severe duty

*2 = keyed (SAE BB)

*R = keyed special

*X = keyed special

*W = keyed special

*V = keyed special

*T = splined (SAE J718c)

Modification

Mounting W/connection variables

	P1 = 1" - S = 3"		P1 = 1" - S = 2.1/2" ²⁾	
P2	1"	3/4" ¹⁾	1"	3/4" ¹⁾
Code	00	01	10	11

¹⁾ for 46 ml/rev. max.²⁾ for 126 ml/rev. max.

The largest cartridge must be always mounted in the front.

Seal Class

1 = S1 (for mineral oil)

4 = S4 (for the resistant fluids)

5 = S5 (for mineral oil and fire resistant fluids)

Design letter

Porting combination (see page 34)


00 = standard

Direct. of rotation (view on shaft end)


R = clockwise

L = counter-clockwise

INTERNAL LEAKAGE (TYPICAL)

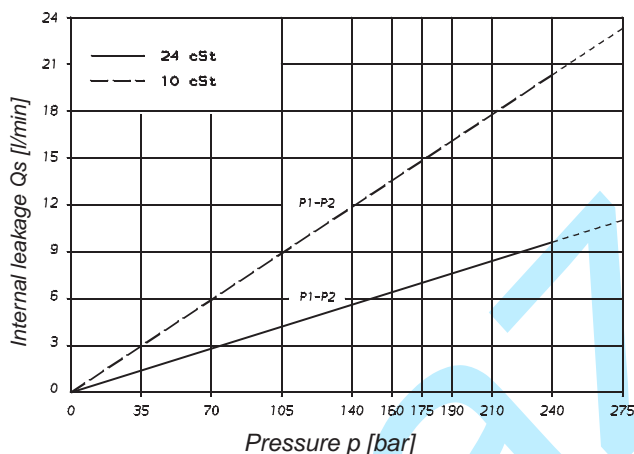


Do not operate the pump more than 5 seconds at any speed or viscosity if internal leakage is more than 50 % of theoretical flow. Total leakage is the sum of each section loss at its operating conditions.

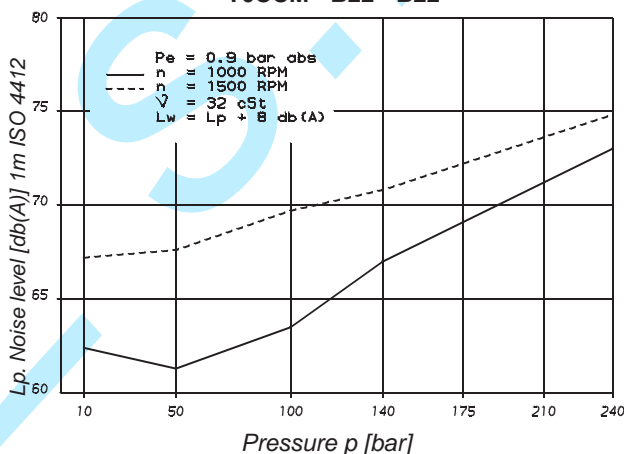NOISE LEVEL (TYPICAL)
T6CCM - B22 - B22


Double pump noise level is given with each section discharging at the pressure noted on the curve.

POWER LOSS HYDROMECHANICAL (TYPICAL)

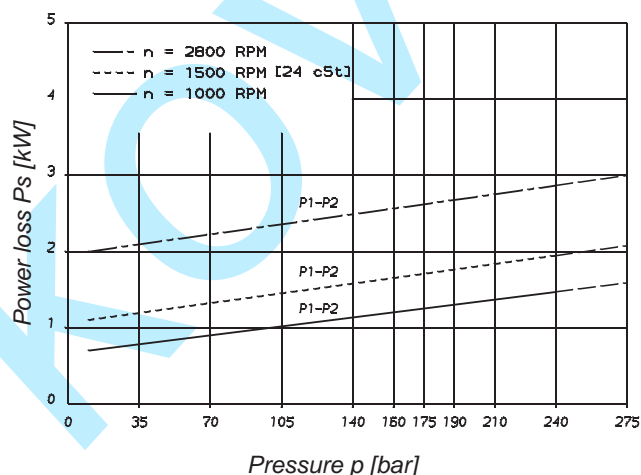


Total hydrodynamic power loss is the sum of each section at its operating conditions.

PERMISSIBLE RADIAL LOAD

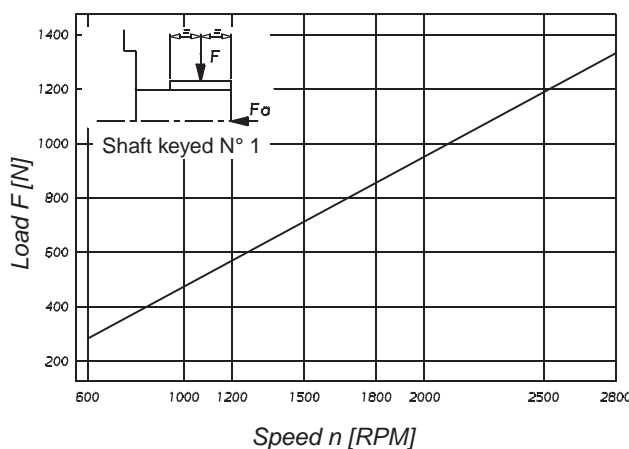

Maximum permissible axial load Fa = 800 N

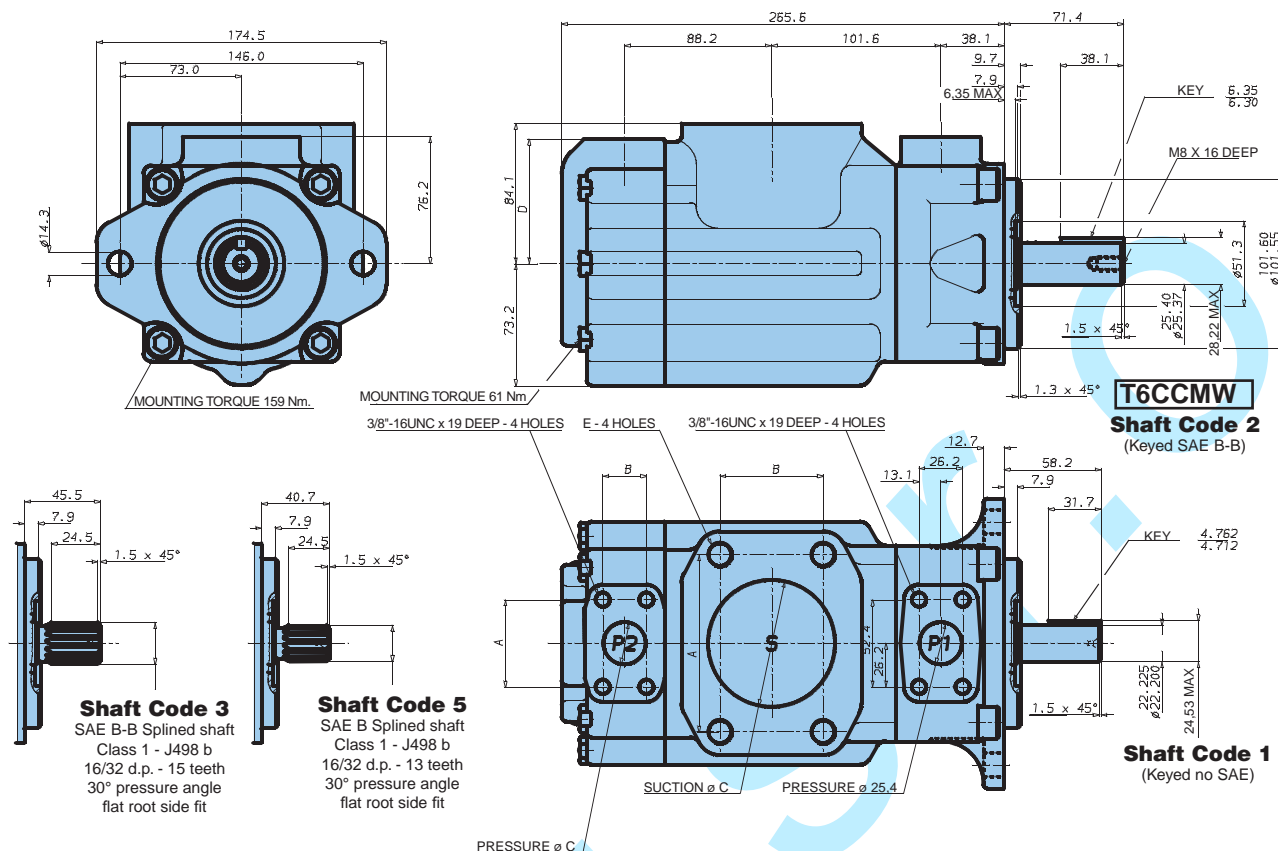

Additional special shafts: see page 33
 Additional T6CCMW shaft code T: see page 33
 Additional T6CCP version shaft see page 33

Port	Code	A	B	C	D	E
S	3"	106,4	61,9	76,2		5/8"-11 x 28.4 deep
S	2 1/2"	88,9	50,8	63,5		1/2"-13 x 23.9 deep
P1	1"	52,4	26,2	25,4	76,2	
P2	3/4"	47,7	22,2	19,0	76,2	
P2	1"	52,4	26,2	25,4	74,7	

Shaft torque limits [ml/rev x bar]		
Pump	Shaft	Vi x p max. P1 + P2
T6CCM	1	14300
T6CCMW	2	21420
T6CCM	3	32670
T6CCM	5	20600

OPERATING CHARACTERISTICS - TYPICAL [24 cSt]

Pressure port	Series	Volumetric Displacement Vi	Flow Q [l/min] & n = 1500 RPM			Input power P [kW] & n = 1500 RPM		
			p = 0 bar	p = 140 bar	p = 240 bar	p = 7 bar	p = 140 bar	p = 240 bar
P1 & P2	B03	10,8 ml/rev	16,2	10,7	-	1,3	5,3	-
	B05	17,2 ml/rev	25,8	20,3	15,8	1,4	7,5	12,2
	B06	21,3 ml/rev	31,9	26,5	22,0	1,5	8,9	14,7
	B08	26,4 ml/rev	39,6	34,1	29,6	1,6	10,7	17,7
	B10	34,1 ml/rev	51,1	45,7	41,2	1,7	13,4	22,3
	B12	37,1 ml/rev	55,6	50,2	45,7	1,7	14,4	24,1
	B14	46,0 ml/rev	69,0	63,5	59,0	1,9	17,6	29,5
	B17	58,3 ml/rev	87,4	82,0	77,5	2,1	21,9	36,9
	B20	63,8 ml/rev	95,7	90,2	85,7	2,2	23,8	40,2
	B22	70,3 ml/rev	105,4	100,0	95,5	2,3	26,1	44,1
	B25 ¹⁾	79,3 ml/rev	118,9	113,5	109,0	2,5	29,2	49,5
P2	B28 ¹⁾	88,8 ml/rev	133,2	127,7	124,5 ²⁾	2,8	32,7	48,5 ²⁾
	B31 ¹⁾	100,0 ml/rev	15,0	144,5	141,3 ²⁾	2,8	36,5	54,4 ²⁾

¹⁾ B25 - B28 - B31 = 2500 R.P.M. max. ²⁾ B28 - B31 = 210 bar max. int.

- Not to use because internal leakage greater than 50% theoretical flow.

Port connection can be furnished with metric threads.

Ordering Code

Hydraulic Pumps, Fixed Series T6DC*, Denison Vane Pumps

Model No.

T6DC* W - B38 - B22 - 1 R 00 - C 1

Series M = Mobile 1 shaft seal

Series P = Mobile 2 shaft seals

Use for severe duty shaft only*

Cam ring for "P1"

(Delivery at 0 bar & 1500 r.p.m.)

B14 = 71,4 l/min B35 = 166,5 l/min

B17 = 87,3 l/min B38 = 180,4 l/min

B20 = 99,0 l/min B42 = 204,0 l/min

B24 = 119,3 l/min B45 = 218,5 l/min

B28 = 134,5 l/min B50 = 237,0 l/min

B31 = 147,4 l/min

Cam ring for "P2"

(Delivery at 0 bar & 1500 r.p.m.)

B03 = 16,2 l/min B17 = 87,4 l/min

B05 = 25,8 l/min B20 = 95,7 l/min

B06 = 31,9 l/min B22 = 105,4 l/min

B08 = 39,6 l/min B25 = 118,9 l/min

B10 = 51,1 l/min B28 = 133,2 l/min

B12 = 55,6 l/min B31 = 150,0 l/min

B14 = 69,0 l/min

Modification

Seal Class

1 = S1 (for mineral oil)

4 = S4 (for the resistant fluids)

5 = S5 (for mineral oil and fire resistant fluids)

Design letter

Porting combination (see page 34)

00 = standard

Direct. of rotation (view on shaft end)

R = clockwise

L = counter-clockwise

Type of shaft

P version

3 = splined (no SAE)

Type of shaft

M version

1 = keyed (SAE C)

2 = keyed (no SAE)

3 = splined (SAE C)


4 = splined (no SAE)

MW severe duty

*5 = keyed (no SAE)

*T = splined (SAE J718c)


INTERNAL LEAKAGE (TYPICAL)

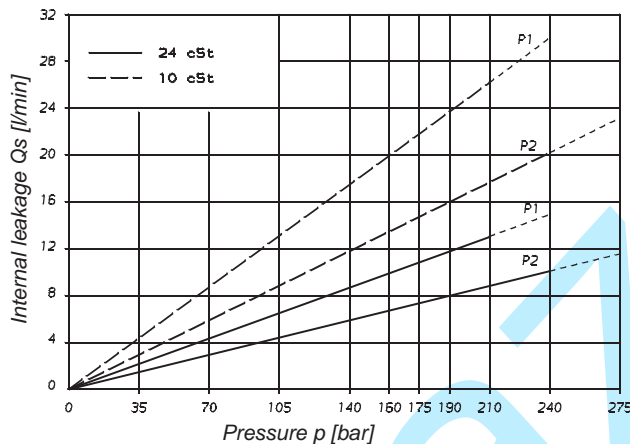

Do not operate the pump more than 5 seconds at any speed or viscosity if internal leakage is more than 50 % of theoretical flow. Total leakage is the sum of each section loss at its operating conditions.


NOISE LEVEL (TYPICAL)

T6DCM - B38 - B22

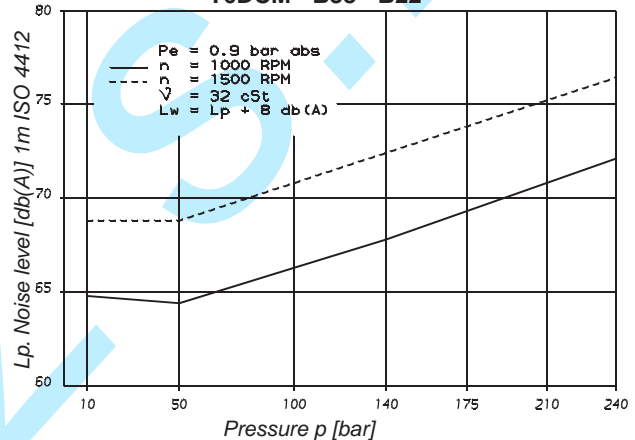


Double pump noise level is given with each section discharging at the pressure noted on the curve.

POWER LOSS HYDROMECHANICAL (TYPICAL)

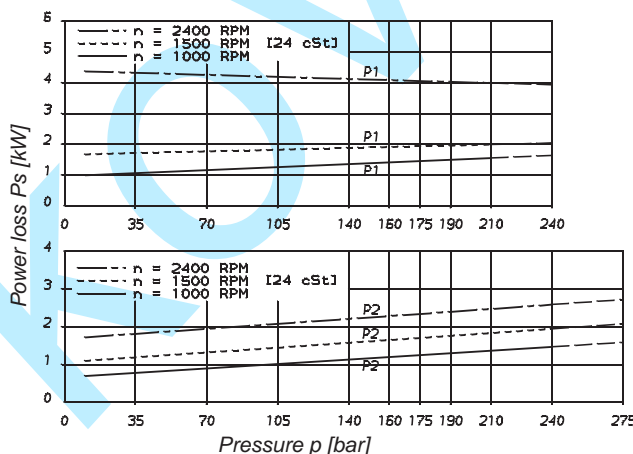


Total hydrodynamic power loss is the sum of each section at its operating conditions.

PERMISSIBLE RADIAL LOAD

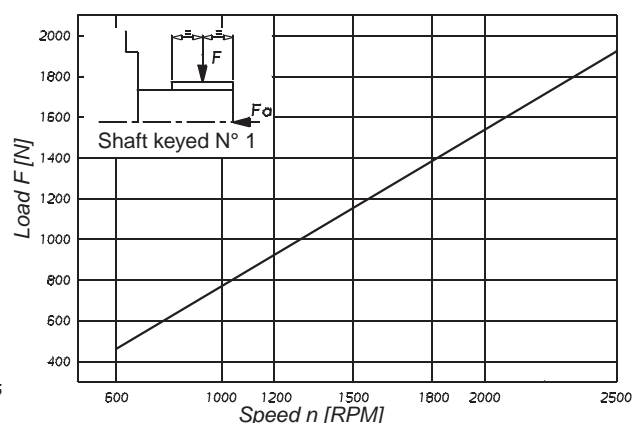

Maximum permissible axial load $F_a = 1200 \text{ N}$

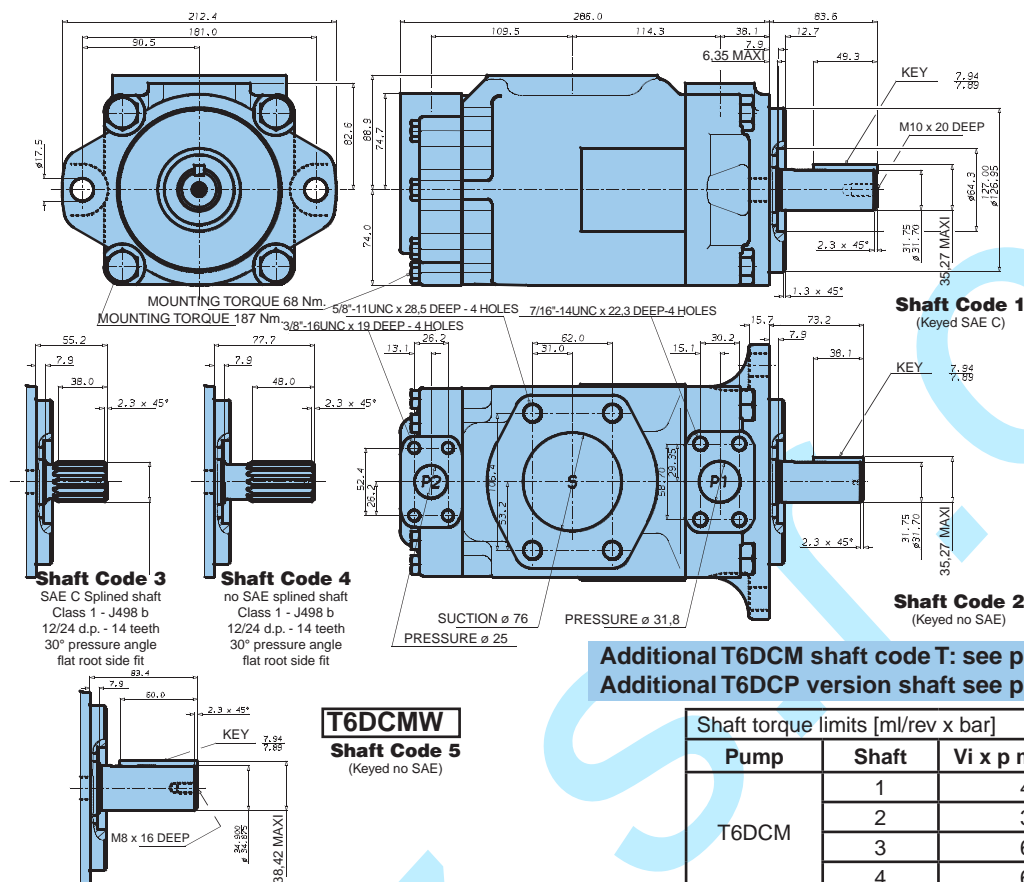

OPERATING CHARACTERISTICS - TYPICAL [24 cSt]

Pressure port	Series	Volumetric Displacement Vi	Flow Q [l/min] & n = 1500 RPM			Input power P [kW] & n = 1500 RPM		
			p = 0 bar	p = 140 bar	p = 240 bar	p = 7 bar	p = 140 bar	p = 240 bar
P1	B14	47,6 ml/rev	71,4	62,1	55,9	2,3	18,5	30,6
	B17	58,2 ml/rev	87,3	78,0	71,8	2,5	22,2	37,0
	B20	66,0 ml/rev	99,0	89,7	83,5	2,8	24,9	41,7
	B24	79,5 ml/rev	119,3	110,0	103,8	3,0	29,6	49,8
	B28	89,7 ml/rev	134,5	125,2	119,0	3,2	33,2	55,9
	B31	98,3 ml/rev	147,4	138,1	131,9	3,3	36,2	61,0
	B35	111,0 ml/rev	166,5	157,2	151,0	3,5	40,7	68,7
	B38	120,3 ml/rev	180,4	171,1	164,9	3,7	43,9	74,3
	B42 ²⁾	136,0 ml/rev	204,0	194,7	188,5	4,0	49,4	83,7
	B45 ²⁾	145,7 ml/rev	218,5	209,2	203,0	4,1	52,8	89,5
P2	B50 ²⁾	158,0 ml/rev	237,0	227,7	224,0 ¹⁾	4,4	57,0	85,0 ¹⁾
	B03	10,8 ml/rev	16,2	10,7	-	1,3	5,3	-
	B05	17,2 ml/rev	25,8	20,3	15,8	1,4	7,5	12,2
	B06	21,3 ml/rev	31,9	26,5	22,0	1,5	8,9	14,7
	B08	26,4 ml/rev	39,6	34,1	29,6	1,6	10,7	17,7
	B10	34,1 ml/rev	51,1	45,7	41,2	1,7	13,4	22,3
	B12	37,1 ml/rev	55,6	50,2	45,7	1,7	14,4	24,1
	B14	46,0 ml/rev	69,0	63,5	59,0	1,9	17,6	29,5
	B17	58,3 ml/rev	87,4	82,0	77,5	2,1	21,9	36,9
	B20	63,8 ml/rev	95,7	90,2	85,7	2,2	23,8	40,2
	B22	70,3 ml/rev	105,4	100,0	95,5	2,3	26,1	44,1
	B25	79,3 ml/rev	118,9	113,5	109,0	2,5	29,2	49,5
	B28	88,8 ml/rev	133,2	127,7	124,5 ¹⁾	2,8	32,7	48,5 ¹⁾
	B31	100,0 ml/rev	150,0	144,5	141,3 ¹⁾	2,8	36,5	54,4 ¹⁾

¹⁾ B28 - B31 - B50 = 210 bar max. int.²⁾ B42 - B45 - B50 = 2200 R.P.M. max

- Not to use because internal leakage greater than 50% theoretical flow

Port connection can be furnished with metric threads.