

# Blowgun Kits

**Ready for use**, **simple** and **ergonomic**, the Parker Legris blowgun kit remains an essential item of equipment for any blowing or spraying operation in the industrial environment.

## Product Advantages

### Ready for Use

- Kit contents:
- one blowgun
  - a 4 metre recoil tube
  - one R1/4 threaded fitting, external diameter 8 mm
- Easy to install and comfortable to use
- Wide range of models and nozzles for optimum flow
- Lower or upper connection
- Labelling and colours can be customised
- Packaging designed to facilitate self-service sales

### Safety & Performance

- Safe operation with the Safety or OSHA models
- Durable, shock-resistant materials
- 100% leak and flow-tested in production
- Date coding to guarantee quality and traceability
- Minimum pressure drop
- Optimisation of your energy consumption with the Energy-Saving model



**Applications**

- Manufacturing Workshops
- Cleaning
- Blowing
- Mixing
- Ejection
- Cooling
- Packaging

## Technical Characteristics

<b>Compatible Fluids</b>	Compressed air Other fluids: contact us
<b>Working Pressure</b>	0 to 10 bar
<b>Working Temperature</b>	Air: -15°C to +50°C Dry air: -20°C to +80°C
<b>Tubes</b>	Recoil tubing

### Regulations

#### Compliance for all blowguns:

DI: 97/23/EC (PED)  
DI: 2002/95/EC (RoHS), 2011/65/EC  
DI: 1907/2006 (REACH)


#### Protection of design

All designs and models of Parker Legris blowguns have been registered with the following numbers: 13224 / 13225 / 13226.

#### Compliance for specific blowguns:

DI: 1910.242 (b) [OSHA]  
The static pressure must be less than 30 psi in case the nozzle becomes blocked.  
DI: 1910.95 (b) [OSHA]  
The noise level must be less than 90 dBA over 8 hours' exposure.  
DI: 2003/10/EC  
Regulation relating to exposure to noise, particularly with regard to risks to hearing. The noise level must be less than 87 dBA.

### Component Materials

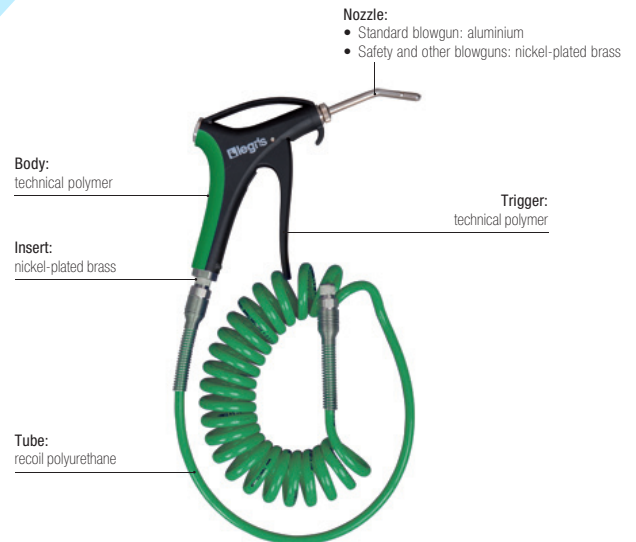

### Silicone-free




## Customisation on request

- Marking
- Kit contents adaptable to your applications
- Additional functions
- Colour






# Blowgun Kits


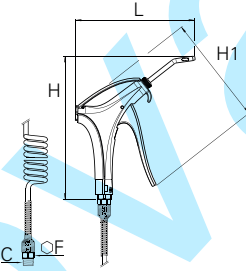

## 0631..09 Blowgun Kit, Lower Connection, Male BSPT Thread

	<p>Technical polymer, nickel-plated brass, treated aluminium, NBR, polyurethane tubing</p> 	<b>C</b>		<b>F</b>	<b>H</b>	<b>H1</b>	<b>L</b>	<b>kg</b>
		R1/4	0631 00 09	16	192.5	139.5	152	0.441
		Flow characteristics, noise level and norm compliance are identical to those of our blowguns (0659 00 13).						




## 0631..01 Safety Blowgun Kit, Lower Connection, Male BSPT Thread

	<p>Technical polymer, nickel-plated brass, NBR, polyurethane tubing</p> 	<b>C</b>		<b>F</b>	<b>H</b>	<b>H1</b>	<b>L</b>	<b>kg</b>
		R1/4	0631 00 01	16	198.5	148.5	154	0.575
		Flow characteristics, noise level and norm compliance are identical to those of our blowguns (0654 00 13).						

## 0631..23 Energy Saving Blowgun Kit with Angled Nozzle, Male BSPT Thread


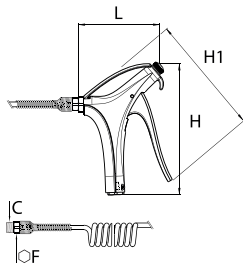

	<p>Technical polymer, nickel-plated brass, NBR, polyurethane tubing</p> 	<b>C</b>		<b>F</b>	<b>H</b>	<b>H1</b>	<b>L</b>	<b>kg</b>
		R1/4	0631 00 23	16	195	148.5	154	0.456
		Flow characteristics, noise level and norm compliance are identical to those of our blowguns (0653 66 13). External diameter of tube 6 mm						

## 0631..03 Blowgun Kit, Lower Connection with Standard Nozzle, Male BSPT Thread


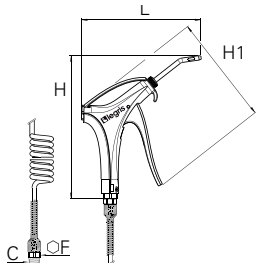

	<p>Technical polymer, nickel-plated brass, NBR, polyurethane tubing</p> 	<b>C</b>		<b>F</b>	<b>H</b>	<b>H1</b>	<b>L</b>	<b>kg</b>
		R1/4	0631 00 03	16	165	148.5	99	0.528
		Flow characteristics, noise level and norm compliance are identical to those of our blowguns (0651 66 13).						

# Blowgun Kits




## 0631..02 Blowgun Kit, Upper Connection with Standard Nozzle, Male BSPT Thread

	<p>Technical polymer, nickel-plated brass, NBR, polyurethane tubing</p> 	<b>C</b> 	<b>F</b>	<b>H</b>	<b>H1</b>	<b>L</b>	<b>kg</b>	
		R1/4	0631 00 02	16	163	148.5	101	0.524
		Flow characteristics, noise level and norm compliance are identical to those of our blowguns (0658 66 13).						




## 0631..05 Blowgun Kit Lower Connection with Short Angled Nozzle, Male BSPT Thread

	<p>Technical polymer, nickel-plated brass, NBR, polyurethane tubing</p> 	<b>C</b> 	<b>F</b>	<b>H</b>	<b>H1</b>	<b>L</b>	<b>Kg</b>	
		R1/4	0631 00 05	16	195,5	148,5	163	0,536
		Flow characteristics, noise level and norm compliance are identical to those of our blowguns (0656 66 13).						

## 0631..04 Blowgun Kit, Lower Connection with Short Angled Nozzle, Male BSPT Thread


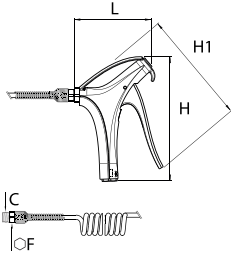

	<p>Technical polymer, nickel-plated brass, NBR, polyurethane tubing</p> 	<b>C</b> 	<b>F</b>	<b>H</b>	<b>H1</b>	<b>L</b>	<b>kg</b>	
		R1/4	0631 00 04	16	195	148.5	163.5	0.536
		Flow characteristics, noise level and norm compliance are identical to those of our blowguns (0657 66 13).						

## 0631..07 Blowgun Kit, Lower Connection with Interchangeable Nozzle, Male BSPT Thread

	<p>Technical polymer, nickel-plated brass, NBR, polyurethane tubing</p> 	<b>C</b> 	<b>F</b>	<b>H</b>	<b>H1</b>	<b>L</b>	<b>kg</b>	
		R1/4	0631 00 07	16	163	148.5	91	0.617
		Flow characteristics, noise level and norm compliance are identical to those of our blowguns (0656 66 13). Delivered without nozzle.						




# Blowgun Kits

## 0631..06 Blowgun Kit, Upper Connection with Interchangeable Nozzle, Male BSPT Thread

	Technical polymer, nickel-plated brass, NBR, polyurethane tubing  	<div> <div>C</div> <div></div> </div>					
		<div> <div>R1/4</div> <div>0631 00 06</div> </div>					
		<div> <div>F</div> <div>H</div> <div>H1</div> <div>L</div> <div>kg</div> </div> <div>           16 161.5 148.5 93 0.501         </div>					

Flow characteristics, noise level and norm compliance are identical to those of our blowguns (0655 66 13).  
 Delivered without nozzle.

## 0631..08 Energy Saving Blowgun Kit, Lower Connection, Interchangeable Nozzle, Male BSPT Thread

	Technical polymer, nickel-plated brass, NBR, polyurethane tubing  	<div> <div>C</div> <div></div> </div>					
		<div> <div>R1/4</div> <div>0631 00 08</div> </div>					
		<div> <div>F</div> <div>H</div> <div>H1</div> <div>L</div> <div>kg</div> </div> <div>           16 163 148.5 91 0.496         </div>					

Flow characteristics, noise level and norm compliance are identical to those of our blowguns (0653 66 13).  
 Delivered without nozzle.