






German Profile





20 Series

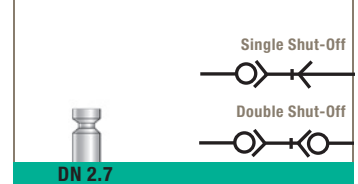





9201 Coupler, Male BSPP and Metric Thread

	Nickel-plated brass, NBR			C		E	F	G	L	kg
			2.7	M5x0.8 G1/8	9201 20 19 9201 20 10	5 7	9 11	10 10	26 28	0.009 0.012
20 Series (DN 2.7): single shut-off = 165 Nl/min 20 Series (DN 2.7): double shut-off = 130 Nl/min										





9214 Coupler, Female BSPP and Metric Thread

	Nickel-plated brass, NBR			C		E	F	G	L	kg
	2.7		M5x0.8	9214 20 19	5	9	10	25	0.010	
			G1/8	9214 20 10	7	12	10	28	0.013	
20 Series (DN 2.7): single shut-off = 165 Nl/min 20 Series (DN 2.7): double shut-off = 130 Nl/min										





9226 Coupler, Bulkhead Mountable, with Barb Connection

	Nickel-plated brass, NBR			ØD		F1	F2	G	L	L1	L2	kg
		3	9226 20 03	12	11	10	51	17	13	0.015		
		4	9226 20 04	12	11	10	51	17	13	0.016		
20 Series (DN 2.7): single shut-off = 165 Nl/min 20 Series (DN 2.7): double shut-off = 130 Nl/min												

9087 Probe, Straight-Through, Male BSPP and Metric Thread


	Nickel-plated brass		C		E	F	L	L1	kg
		2.7	M5x0.8	9087 20 19	5	7	18	10	0.002
			G1/8	9087 20 10	7	11	18	10	0.005
Probe without shut-off									

9287 Probe, Valved, Male BSPP and Metric Thread

	Nickel-plated brass, NBR			C		E	F	L	L1	kg
			2.7	M5x0.8	9287 20 19	5	7	28	10	0.006
				G1/8	9287 20 10	7	11	30	10	0.009
Probe with shut-off										





German Profile

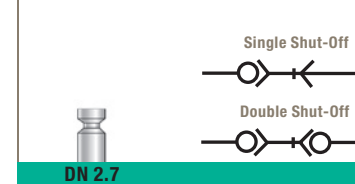20 Series








9086

Probe, Straight-Through, Female BSPP and Metric Thread

	<p>Nickel-plated brass</p> 		C			E	F	L	L1	kg	
2.7	M5x0.8	9086 20 19	5	7	17	10	0.003				
	G1/8	9086 20 10	7	12	19	10	0.006				
Probe without shut-off											





9286

Probe, Valved, Female BSPP and Metric Thread

	<p>Nickel-plated brass, NBR</p> 		C			E F L L1 kg						
2.7						M5x0.8	9286 20 19	5	7	27	10	0.007
						G1/8	9286 20 10	7	12	30	10	0.010
Probe with shut-off												





9085

Probe, Straight-Through, with Barb Connection

	<p>Nickel-plated brass</p> 		ØD		L	L1	L2	kg
		3	9085 20 03	24	10	13	0.002	
		4	9085 20 04	24	10	13	0.002	
		5	9085 20 05	24	9	13	0.003	
Probe without shut-off								





9285

Probe, Valved, with Barb Connection

		<p>Nickel-plated brass, NBR</p>		<p>ØD</p>			<p>L</p>	<p>L1</p>	<p>L2</p>	<p>kg</p>					
						3					9285 20 03	37	10	13	0.007
						4					9285 20 04	37	10	13	0.007
						5					9285 20 05	37	10	13	0.007
Probe with shut-off															


9095

Probe, Straight-Through, Bulkhead Mountable, with Barb Connection


	Nickel-plated brass			ØD		F	L	L1	L2	L3	kg
	2.7		3	9095 20 03	11	44	10	17	13	0.012	
	4		9095 20 04	11	44	10	17	13	0.012		
Probe without shut-off											

German Profile

21 Series

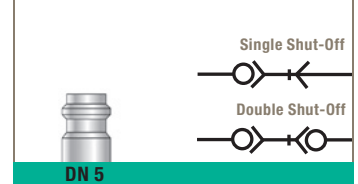


9201 Coupler, Male BSPP Thread

	Nickel-plated brass, NBR	DN	C		E	F	G	L	kg
5			G1/8	9201 21 10	7	14	16	36	0.027
			G1/4	9201 21 13	9	17	16	38	0.036


21 Series (DN 5): single shut-off = 560 NI/min
21 Series (DN 5): double shut-off = 310 NI/min

9214 Coupler, Female BSPP Thread

	Nickel-plated brass, NBR	DN	C		E	F	G	L	kg
5			G1/8	9214 21 10	9	14	16	36	0.030
			G1/4	9214 21 13	7	17	16	38	0.040


21 Series (DN 5): single shut-off = 560 NI/min
21 Series (DN 5): double shut-off = 310 NI/min

9223 Coupler with Barb Connection

	Nickel-plated brass, NBR	DN	ØD		F	G	L	L1	kg
5			4	9223 21 04	14	16	46	17	0.027
			6	9223 21 06	14	16	46	17	0.027
			8	9223 21 08	14	16	46	17	0.028


21 Series (DN 5): single shut-off = 560 NI/min
21 Series (DN 5): double shut-off = 310 NI/min

9226 Coupler, Bulkhead Mountable, with Barb Connection

	Nickel-plated brass, NBR	DN	ØD		F1	F2	G	L	L1	L2	kg
5			4	9226 21 04	14	14	16	60	14	17	0.034
			6	9226 21 06	17	17	16	60	14	17	0.048
			8	9226 21 08	17	17	16	60	14	17	0.047


21 Series (DN 5): single shut-off = 560 NI/min
21 Series (DN 5): double shut-off = 310 NI/min

9087 Probe, Straight-Through, Male BSPP Thread

	Nickel-plated brass	DN	C		E	F	L	L1	kg
5			G1/8	9087 21 10	7	14	25	14	0.012
			G1/4	9087 21 13	9	17	28	14	0.019

Probe without shut-off


9287 Probe, Valved, Male BSPP Thread

	Nickel-plated brass, NBR	DN	C		E	F	L	L1	kg
5			G1/8	9287 21 10	7	14	40	14	0.023
			G1/4	9287 21 13	9	17	42	14	0.031





Probe with shut-off

German Profile





21 Series







9086 Probe, Straight-Through, Female BSPP Thread

	<p>Nickel-plated brass</p> 	<p> C </p>						
			E	F	L	L1	kg	
			5	G1/8	9086 21 10	8	14	25
		G1/4	9086 21 13	9	17	26	14	0.018
Probe without shut-off								





9286 Probe, Valved, Female BSPP Thread

	<p>Nickel-plated brass, NBR</p> 	 C 						
			E	F	L	L1	kg	
			5	G1/8	9286 21 10	8	14	40
		G1/4	9286 21 13	9	17	42	14	0.035
Probe with shut-off								




9085 Probe, Straight-Through, with Barb Connection

	<p>Nickel-plated brass</p> 		ØD			L	L1	L2	kg
			4	9085 21 04		32	14	17	0.006
		5	6	9085 21 06		32	14	17	0.008
			8	9085 21 08		32	14	17	0.009
		Probe without shut-off							

9285 Probe, Valved, with Barb Connection

	<p>Nickel-plated brass, NBR</p> 		ØD			F	L	L1	L2	kg
			4		9285 21 04	14	50	14	17	0.022
		5	6		9285 21 06	14	50	14	17	0.023
			8		9285 21 08	14	50	14	17	0.024
		Probe with shut-off								

9095 Probe, Straight-Through, Bulkhead Mountable with Barb Connection

											
			F1	F2	L	L1	L2	L3	kg		
			4	9095 21 04	14	14	50	14	14	17	0.019
			5	6	9095 21 06	14	17	50	14	14	17
	8	9095 21 08	14	17	50	14	14	17	0.028		
Probe without shut-off											