
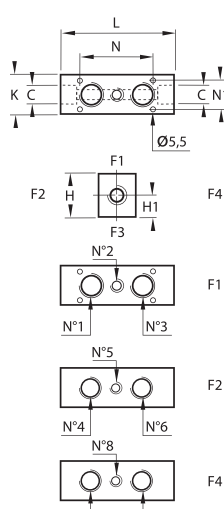



# Brass Manifolds

## 0135 Manifold Block, Female BSPP Thread

	Brass		C		H	H1	K	L	N	N1	kg
			G1/4	0135 06 13	30	13	25	70	37	17	0.329
				0135 09 13	30	13	25	87	54	17	0.409
			G1/2	0135 06 21	40	16	35	86	45	27	0.714
				0135 09 21	40	16	35	109	68	27	0.899
			G3/4	0135 10 27	45	21	40	122	78	32	1.232
This product is designed to distribute in several directions. The number of ports can be increased by using tee pieces, cross pieces or double banjo couplings.											

### Installation Options


	<div>F1<div><div><div>N°2</div><div>N°1</div><div>N°3</div></div></div>F1</div>				<div>F2<div><div><div>N°5</div><div>N°4</div><div>N°6</div></div></div>F2</div>				<div>F4<div><div><div>N°8</div><div>N°7</div><div>N°9</div></div></div>F4</div>			
	Number of Outlets	N°1	N°2	N°3	Number of Outlets	N°4	N°5	N°6	Number of Outlets	N°7	N°8	N°9
0135 06 13	1		G1/4		2	G1/8		G1/8	2	G1/8		G1/8
0135 09 13	2	G1/4		G1/4	3	G1/8	G1/8	G1/8	3	G1/8	G1/8	G1/8
0135 06 21	1		G1/2		2	G1/4		G1/4	2	G1/8		G1/8
0135 09 21	2	G1/2		G1/2	3	G1/4	G1/4	G1/4	3	G1/8	G1/8	G1/8
0135 10 27	3	G1/2	G1/8	G1/2	3	G1/8	G1/8	G1/8	3	G1/4	G1/8	G1/4

# Anodised Aluminium Manifolds

**3310**

## In-Line Manifold


Treated aluminium, NBR

ØD	C		Number of Outlets	E	H	L	L1	N	kg
4	G1/4	<a href="#">3310 04 13</a>	8	10	33	114	104	11.5	0.175
6	G1/4	<a href="#">3310 06 13</a>	8	10	33	114	104	12.5	0.169
8	G3/8	<a href="#">3310 08 17</a>	6	12	33	114	104	15	0.156
10	G1/2	<a href="#">3310 10 21</a>	6	14	48	130	119.5	17	0.348
12	G1/2	<a href="#">3310 12 21</a>	6	14	45	117	107	20.5	0.370

**3311**




## Manifold, Female BSPP and Metric Thread

Treated aluminium

C1	C2		Number of Outlets	H	H1	H2	K	L	L1	N	ØT	kg
G1/8	M5x0.8	<a href="#">3311 19 10 07</a>	7	3.5	20	8.5	15	95	80	11	4.4	0.067
		<a href="#">3311 10 13 02</a>	2	4.5	30	15	20	61	50	30	5	0.079
		<a href="#">3311 10 13 03</a>	3	4.5	30	15	20	91	30	30	5	0.121
G1/4		<a href="#">3311 10 13 04</a>	4	4.5	30	15	20	121	60	30	5	0.165
		<a href="#">3311 10 13 05</a>	5	4.5	30	15	20	151	90	30	5	0.209
		<a href="#">3311 10 13 06</a>	6	4.5	30	15	20	181	120	30	5	0.244
		<a href="#">3311 13 17 02</a>	2	5.5	30	11	20	74	61	36	6.5	0.076
		<a href="#">3311 13 17 03</a>	3	6	30	11	20	110	36	36	6.5	0.121
G3/8		<a href="#">3311 13 17 04</a>	4	6	30	11	20	146	72	36	6.5	0.144
		<a href="#">3311 13 17 05</a>	5	6	30	11	20	182	108	36	6.5	0.212
		<a href="#">3311 13 17 06</a>	6	6	30	11	20	218	144	36	6.5	0.265

**3312**


## Cross Manifold, Female BSPP and Metric Thread

	Treated aluminium			C	H	K	L	L1	N	ØT	kg
	M5x0.8	3312 00 19		20	10	20	12	12	4.5	0.010	
	G1/8	3312 00 10		30	16	30	23	22	4.5	0.029	
	G1/4	3312 00 13		40	20	40	30	27	5.5	0.066	
	G3/8	3312 00 17		50	25	50	38	39	6.5	0.126	
	G1/2	3312 00 21		50	25	50	38	39	6.5	0.101	
											

**3313**

## Double Manifold, Female BSPP Thread

Treated aluminium


C1	C2		Number of Outlets	H	H1	H2	K	L	L1	N	ØT	kg
G1/4	G1/8	<a href="#">3313 10 13 02</a>	2x2	4.5	30	15	20	61	50	30	5	0.075
	G1/8	<a href="#">3313 10 13 03</a>	2x3	4.5	30	15	20	91	30	30	5	0.115
	G1/8	<a href="#">3313 10 13 04</a>	2x4	4.5	30	15	20	121	60	30	5	0.151
	G1/8	<a href="#">3313 10 13 05</a>	2x5	4.5	30	15	20	151	90	30	5	0.194
G3/8	G1/4	<a href="#">3313 13 17 02</a>	2x2	6	40	20	20	74	61	36	6.5	0.109
	G1/4	<a href="#">3313 13 17 03</a>	2x3	6	40	20	20	110	36	36	6.5	0.179
	G1/4	<a href="#">3313 13 17 04</a>	2x4	6	40	20	20	146	72	36	6.5	0.238
	G1/4	<a href="#">3313 13 17 05</a>	2x5	6	40	20	20	182	108	36	6.5	0.286
G1/2	G1/4	<a href="#">3313 13 21 03</a>	2x3	6	40	20	28	116	36	36	6.5	0.222
	G1/4	<a href="#">3313 13 21 04</a>	2x4	6	40	20	28	152	72	36	6.5	0.295
	G1/4	<a href="#">3313 13 21 05</a>	2x5	6	40	20	28	188	108	36	6.5	0.369

# Anodised Aluminium Manifolds

## 3301 Modular Manifold



Treated aluminium, NBR




ØD		Number of Outlets	H	H1	H2	H3	L	L1	N	N1	kg
4	3301 04 00	8	25	10	4.5	16	73.5	25	35	17	0.105
6	3301 06 00	4	25	10	4.5	16	73.5	25	35	17	0.108

Fixing with screw M3x20

## 3301 Manifold, Female BSPP Thread



Treated aluminium, NBR




C		Number of Outlets	H	H1	H2	H3	L	L1	N	N1	kg
G1/8	3301 07 10	4	25	10	4.5	16	73.5	25	35	17	0.097

Fixing with screw M3x20  
NPT available on request

## 3302 Single Manifold, Female BSPP Thread



Treated aluminium, NBR




C		H	L	L1	kg
G1/4	3302 01 13	25	24.5	25	0.030
	3302 01 13 01	25	24.5	25	0.031

3302 01 13: side entry thread  
3302 01 13 01: rear entry thread  
NPT available on request

## 3302 Double Manifold, Female BSPP Thread



Treated aluminium, NBR




C		H	H1	H2	L	N	kg
G3/8	3302 02 17	25	12.5	24.5	51	26	0.061

Side entry thread  
NPT available on request

## 3302 Triple Manifold, Female BSPP Thread



Treated aluminium, NBR






C		H	H1	H2	L	N	kg
G3/8	3302 03 17	25	12.5	25	77	26	0.087




Side entry thread  
NPT available on request

# Anodised Aluminium Manifolds

## 3303 End Plate for Manifold

	<p>Treated aluminium</p> 		<b>H H1 L kg</b>			
			<b>3303 00 01</b>			
			9.5	3.5	25	0.014

## 3303 Angled Fixing Plate

	<p>Treated aluminium</p> 		<b>kg</b>			
			<b>3303 00 02</b>			
						0.027