

Gerade Einschraubverschraubung


mit Dichtkante

Union mâle

avec arête d'étanchéité

Male adaptor union

with edge seal

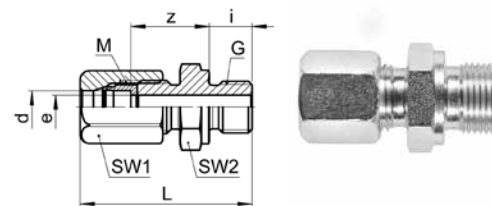

SO 6331

Type -d-G	Mat.-Nr.	bar	M	SW1	SW2	L	D	i	t	z	e	kg/100
G=Rohrgewinde (zylindrisch)	G=Filetage-gaz BSP (cylindrique)		G=BSP thread (parallel)									
SO 6331-6-1/8	218.1141.100	400	12x1.5	14	14	32.5	14.5	8.0	1.0	16.5	4.0	2.500
SO 6331-6-1/4	218.1141.110	400	12x1.5	14	19	38.0	18.5	12.0	1.5	18.0	5.0	3.900
SO 6331-8-1/4	218.1141.170	300	14x1.5	17	19	38.0	18.5	12.0	1.5	18.0	6.0	4.500
SO 6331-10-1/4	218.1141.270	250	16x1.5	19	19	41.0	18.5	12.0	1.5	19.0	7.0	5.800
SO 6331-10-3/8	218.1141.280	250	16x1.5	19	22	42.5	22.5	12.0	2.0	20.5	7.0	7.500
SO 6331-10-1/2	218.1141.285	250	16x1.5	19	27	45.0	27.0	14.0	2.5	21.0	8.0	8.900
SO 6331-12-1/4	218.1141.380	250	18x1.5	22	19	43.0	18.5	12.0	1.5	19.0	7.0	7.250
SO 6331-12-3/8	218.1141.390	250	18x1.5	22	22	44.5	22.5	12.0	2.0	20.5	9.0	8.500
SO 6331-12-1/2	218.1141.400	250	18x1.5	22	27	47.0	27.0	14.0	2.5	21.0	10.0	11.200
SO 6331-14-3/8	218.1141.502	250	22x1.5	27	22	46.5	22.5	12.0	2.0	21.5	9.0	11.800
SO 6331-14-1/2	218.1141.504	250	22x1.5	27	27	49.0	27.0	14.0	2.5	22.0	11.0	13.700
SO 6331-15-3/8	218.1141.532	200	22x1.5	27	22	46.5	22.5	12.0	2.0	21.5	9.0	11.800
SO 6331-15-1/2	218.1141.534	200	22x1.5	27	27	49.0	27.0	14.0	2.5	22.0	11.0	14.200
SO 6331-16-1/2	218.1141.566	200	24x1.5	30	27	52.0	27.0	14.0	2.5	23.0	12.0	17.000
SO 6331-18-3/8	218.1141.644	200	26x1.5	32	32	53.0	22.5	12.0	2.0	25.0	9.0	17.900
SO 6331-18-1/2	218.1141.646	200	26x1.5	32	27	53.0	27.0	14.0	2.5	23.0	14.0	17.900
SO 6331-18-3/4	218.1141.648	200	26x1.5	32	32	56.0	33.0	16.0	2.5	24.0	16.0	21.300
SO 6331-18-1	218.1141.652	200	26x1.5	32	41	58.0	40.0	18.0	2.5	24.0	14.0	29.660
SO 6331-20-1/2	218.1141.706	200	26x1.5	32	27	54.5	27.0	14.0	2.5	23.5	14.0	17.900
SO 6331-20-3/4	218.1141.708	200	26x1.5	32	32	57.5	33.0	16.0	2.5	24.5	16.0	21.600
SO 6331-20-1	218.1141.712	200	26x1.5	32	41	59.5	40.0	18.0	2.5	24.5	14.0	29.880
SO 6331-22-3/4	218.1141.768	160	30x2.0	36	32	56.0	33.0	16.0	2.5	26.0	18.0	24.200
SO 6331-22-1	218.1141.770	160	30x2.0	36	41	59.0	40.0	18.0	2.5	27.0	19.0	33.500
SO 6331-25-1	218.1141.810	160	33x2.0	41	41	64.0	40.0	18.0	2.5	29.0	22.0	40.600
SO 6331-28-1	218.1141.850	160	36x2.0	41	41	61.0	40.0	18.0	2.5	27.0	23.0	33.200
SO 6331-30-1	218.1141.900	160	39x2.0	46	41	68.0	40.0	18.0	2.5	32.0	25.0	44.600
SO 6331-30-1 1/4	218.1141.902	160	39x2.0	46	50	72.0	50.0	20.0	2.5	34.0	27.0	58.500

Gerade Einschraubverschraubung R


mit Dichtkante

Union mâle R

avec arête d'étanchéité

Male adaptor union R

with edge seal

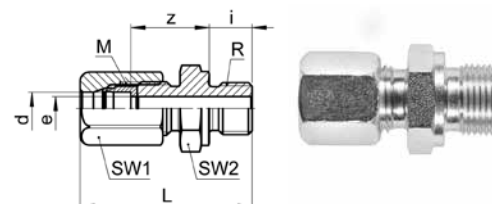

SO 6331 R

Type -d-R	Mat.-Nr.	bar	M	SW1	SW2	L	D	i	t	z	e	kg/100
R=Rohrgewinde (kegelig)	R=Filetage-gaz BSP (conique)		R=BSP thread (tapered)									
SO 6331-8-1/8k	218.1101.160	300	14x1.5	17	14	31.0	17.0	8.0	0.5	18.0	5.2	3.200

Fortsetzung nächste Seite

Suite à la prochaine page

Continued on next page

d=Rohraussen-ø
e=kleinste Bohrung
L=Mass in montiertem Zustand

d=ø extérieur du tube
e=ø-min. de passage
L=après montage

d=tube outside diameter
e=minimum bore
L=installed length