

Kuppler mit Aussengewinde

nicht absperrend


Coupleur avec filetage

non-obturant

Coupler with male thread

no shut-off

K-CPB

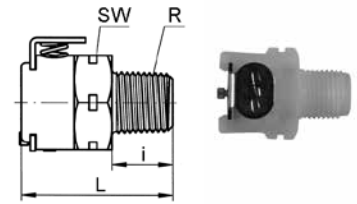

Type -R	Mat.-Nr.	bar	NW	SW	L	i	kg/100
R=Rohrgewinde (kegelig)	R=Filetage-gaz BSP (conique)						
K-CPB2-1/8	YBD.CPB2.113020	8	3.2	15	25.4	10.2	0.490
K-CPB4-1/4	YBD.CPB4.113040	8	6.4	18	29.4	12.7	0.680

Kuppler mit Aussengewinde

absperrend


Coupleur avec filetage

obturant

Coupler with male thread

shut-off

KV-CPB

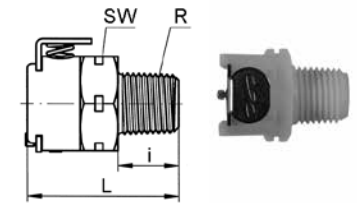

Type -R	Mat.-Nr.	bar	NW	SW	L	i	kg/100
R=Rohrgewinde (kegelig)	R=Filetage-gaz BSP (conique)						
KV-CPB2-1/8	YBD.CPB2.123020	8	3.2	15	25.4	10.2	0.550
KV-CPB4-1/4	YBD.CPB4.123040	8	6.4	15	29.4	12.7	0.740
KV-CPB4-3/8	YBD.CPB4.123060	8	6.4	18	29.4	12.7	0.760

Kuppler mit Schlauchtülle

nicht absperrend


Coupleur avec douille cannelée pour tuyau

non-obturant

Coupler with hose nozzle

no shut-off

K-CPC

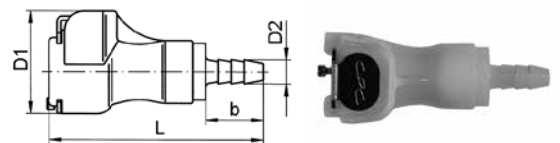

Type -LW	Mat.-Nr.	bar	NW	L	D1	D2	b	kg/100
K-CPC2-LW 4	YBD.CPC2.117040	8	3.2	42.0	20.0	5.0	11.4	0.550
K-CPC2-LW 5	YBD.CPC2.117050	8	3.2	47.2	20.0	6.0	16.5	0.560
K-CPC2-LW 6,5	YBD.CPC2.117060	8	3.2	47.2	20.0	7.5	16.5	0.580
K-CPC4-LW 6,5	YBD.CPC4.117060	8	6.4	49.5	23.4	7.5	16.5	0.620
K-CPC4-LW 8	YBD.CPC4.117080	8	6.4	49.5	23.4	9.0	16.5	0.720
K-CPC4-LW 9,5	YBD.CPC4.117090	8	6.4	49.5	23.4	10.5	16.5	0.760