

Industrial Hydraulic Pumps

T7/T67/T6

Denison Vane Technology, fixed displacement

aerospace
climate control
electromechanical
filtration
fluid & gas handling
hydraulics
pneumatics
process control
sealing & shielding



ENGINEERING YOUR SUCCESS.

GENERAL

General characteristics	4
Min. and max. speeds - Pressure ratings	
Single pumps	5 - 6
Min. and max. speeds - Pressure ratings	
Double & triple pumps	7
Minimum allowable inlet pressure	8 - 9
Main calculation	10
Intermittent pressure rating	10
Description	11
Start-up instructions & recommendations	
General	12 - 13
Shaft & coupling data	13
Specific point	13
Fluids	13 - 14
Formulas	14
General characteristics	15 - 16
Notes	17

SINGLE**T7AS**

Ordering code and technical data	18
Dimensions and operating characteristics	19

T7ASW

Ordering code and technical data	20
Dimensions and operating characteristics	21

T7B - T7BS

Ordering code and technical data	22
Dimensions and operating characteristics	23

T6C

Ordering code and technical data	24
Dimensions and operating characteristics	25

T7D - T7DS

Ordering code and technical data	26
Dimensions and operating characteristics	27

T7E - T7ES

Ordering code and technical data	28
Dimensions and operating characteristics	29

DOUBLE**T7BB - T7BBS**

Ordering code and technical data	30
Dimensions and operating characteristics	31

T6CC

Ordering code and technical data	32
Dimensions and operating characteristics	33

T67CB

Ordering code and technical data	34
Dimensions and operating characteristics	35

T7DB - T7DBS

Ordering code and technical data	36
Dimensions and operating characteristics	37

T67DC

Ordering code and technical data	38
Dimensions and operating characteristics	39

T7DD - T7DDS

Ordering code and technical data	40
Dimensions and operating characteristics	41

T7EB - T7EBS

Ordering code and technical data	42
Dimensions and operating characteristics	43

T67EC	Ordering code and technical data	44	
	Dimensions and operating characteristics	45	
T7ED - T7EDS	Ordering code and technical data	46	
	Dimensions and operating characteristics	47	
T7EE - T7EES	Ordering code and technical data	48	
	Dimensions and operating characteristics	49	
TRIPLE	T7DBB - T7DBBS	Ordering code and operating characteristics	50
	Technical data	51	
	Dimensions	52	
T7DCB - T7DCBS	Dimensions	52	
	Ordering code and operating characteristics	53	
	Technical data	54	
T7DCC - T7DCCS	Technical data	55	
	Ordering code and operating characteristics	56	
	Dimensions	52	
T7DDB - T7DDBS	Ordering code and operating characteristics	57	
	Technical data	58	
	Dimensions	59	
T67DDCS	Dimensions	60	
	Ordering code and operating characteristics	61	
	Technical data	62	
T7EDB - T7EDBS	Technical data	63	
	Ordering code and operating characteristics	64	
	Dimensions	65	
T67EDC - T67EDCS	Dimensions	66	
	Ordering code and operating characteristics	67	
	Technical data	68	
T7EEC - T7EECS	Technical data	69	
	Ordering code and operating characteristics	70	
	Dimensions	71	
	Porting diagrams for double and triple pumps.....	72	
	Porting diagrams for triple pumps	73	
	Notes	74	
	Warning	75	

CHARACTERISTICS

These vane pumps have been specially designed for high/low circuits. The combination of different cartridges in double and triple pumps allows low flow at high pressure (300 bar max.) and high flow at lower pressure. This is a clever way to optimize your circuit design. This pump feature will also allow a very fast pressure cycle change with a very precise flow repeatability.

GREATER FLOW

Size A : 5,8 to 40,0 ml/rev.
 Size B : 5,8 to 50,0 ml/rev.
 Size C : 10,8 to 100,0 ml/rev.
 Size D : 44,0 to 158,0 ml/rev.
 Size E : 132,3 to 268,7 ml/rev.

HIGHER PRESSURE

A : up to 300 bar max.
 B : up to 320 bar max. (300 bar for multiple pump).
 C : up to 275 bar max.
 D : up to 280 bar max. (250 bar for multiple pump).
 E : up to 240 bar max.

WIDE SPEED RANGE

Industrial pumps : Min. : 600 RPM - Max. up to 3600 RPM

BETTER EFFICIENCY

Increases productivity, reduces heating and reduces operation costs.

LOW NOISE LEVELS

Increases operator safety and eases machines acceptances.

MOUNTING FLEXIBILITY

Single pumps : 4 different positions.
 Double pumps : 32 different positions.
 Triple pumps : 128 different positions.

CARTRIDGE DESIGN

Provides for drop-in assemblies. They permit easy conversion and service.
 A, B and D cartridges : bi-directional technology.
 C and E cartridges : uni-directional technology.

WIDE RANGE OF ACCEPTABLE VISCOSITIES

Viscosities from 860 to 10 cSt permit colder starts and hotter running. The balanced design compensates for wear and temperature changes. At high viscosity or cold temperature, the rotor to side plates gap is well lubricated and improves mechanical efficiency.

FIRE RESISTANT FLUIDS AND BIODEGRADABLE FLUIDS

Phosphate esters, organic esters, chlorinated hydrocarbons, water glycols, rapeseed may be pumped at high pressures and with long service life by these pumps.

GENERAL APPLICATIONS INSTRUCTIONS

1. Check speed range, pressure, temperature, fluid quality, fluid viscosity and pump rotation.
2. Check inlet conditions of the pump, if it can accept the application requirements.
3. Check the type of shaft : if it will support the operating torque.
4. Check the coupling must be chosen to minimize pump shaft load (weight, misalignment).
5. Filtration : must be adequate for the lowest contamination level.
6. Check the environment of the pump : as to avoid noise reflection, pollution and shocks.

Model of pump	Series	Theoretical Displacement Vi	Minimum Speed RPM	Maximum Speed ³⁾		Maximum Pressure									
				HF-0, HF-1 HF-2	HF-3, HF-4 HF-5	HF-0, HF-2		HF-1, HF-4, HF-5		HF-3					
						Int.	Cont.	Int.	Cont.	Int.	Cont.				
		ml/rev.	RPM	RPM	RPM	bar	bar	bar	bar	bar	bar				
T7AS ²⁾	B06	5,8	600	3600	1800	300	275	240	210	175	140				
	B10	9,8													
	B11	11,0													
	B13	12,8													
	B17	17,2		3000		275	240								
	B20	19,8													
	B22	22,5													
	B25	24,9													
T7ASW ²⁾	B26	26,0	600	3600	1800	300	275	240	210	175	140				
	B28	28,0													
	B30	30,0													
	B32	31,8		3000		280	240								
	B34	34,0													
	B36	36,0													
	B40	40,0													
T7B T7BS	B02	5,8	600	3600	1800	320 ¹⁾	290	240	210	175	140				
	B03	9,8													
	B04	12,8													
	B05	15,9													
	B06	19,8													
	B07	22,5													
	B08	24,9													
	B09	28,0		3000		300	275								
	B10	31,8													
	B11	35,0													
	B12	41,0													
	B14	45,0													
	B15	50,0													
T6C	003	10,8		600	2800	1800	275	240	210	175	175				
	005	17,2													
	006	21,3													
	008	26,4													
	010	34,1													
	012	37,1													
	014	46,0													
	017	58,3													
	020	63,8	2500			210	160			160	140				
	022	70,3													
	025	79,3													
	028	88,8													
	031	100,0													

HF-0, HF-2 = Antiwear Petroleum Base - HF-1 = Non Antiwear Petroleum Base - HF-3 = Water in oil Invert Emulsions
 HF-4 = Water Glycols Solutions - HF-5 = Synthetic Fluids

¹⁾ Please consult Parker for application over 300 bar.

²⁾ Please be careful as these cartridge designation are now in ml/rev. (example : B22 = 22,5 ml/rev.)

³⁾ Please be sure that the inlet velocity is under 1,9 m/sec. (see page 12, start-up & check-up).

For further information, or if the performance characteristics outlined here above do not meet your particular requirements, please consult your local Parker office.

Model of pump	Series	Theoretical Displacement Vi	Minimum Speed	Maximum Speed ³⁾		Maximum Pressure					
				HF-0, HF-1 HF-2		HF-3, HF-4 HF-5		HF-0, HF-2		HF-1, HF-4, HF-5	
				ml/rev.	RPM	RPM	RPM	bar	bar	bar	bar
T7D T7DS	B14	44,0	600	3000	1800	300	250	240	210	175	140
	B17	55,0									
	B20	66,0									
	B22	70,3									
	B24	81,1									
	B28	90,0									
	B31	99,2									
	B35	113,4		2800	2500	280	260	230	210	175	140
	B38	120,6									
	B42	137,5									
	045 ¹⁾	145,7		2200	2000	240	210	210	175	140	140
	050 ¹⁾	158,0									
T7E ²⁾ T7ES	042	132,3	600	2200	1800	240	210	210	175	175	140
	045	142,4									
	050	158,5									
	052	164,8									
	054	171,0									
	057	183,3									
	062	196,7									
	066	213,3									
	072	227,1									
	085	268,7									

HF-0, HF-2 = Antiwear Petroleum Base

HF-1 = Non Antiwear Petroleum Base

HF-3 = Water in oil Invert Emulsions

HF-4 = Water Glycols Solutions

HF-5 = Synthetic Fluids

¹⁾ Ten vane technology.²⁾ For T7E, below 10 bar, please contact Parker.³⁾ Please be sure that the inlet velocity is under 1,9 m/sec. (see page 12, start-up & check-up).

For further information, or if the performance characteristics outlined here above do not meet your particular requirements, please consult your local Parker office.

Model of pump	Series	Theoretical Displacement Vi	Minimum Speed	Maximum Speed ³⁾			Maximum Pressure					
				HF-0, HF-1		HF-3, HF-4	HF-0, HF-2		HF-1, HF-4, HF-5		HF-3	
				ml/rev.	RPM	RPM	RPM	bar	bar	bar	bar	bar
T7 <u>BB/S</u> T67 <u>C<u>B</u></u> T7 <u>DB/S</u> T7 <u>EB/S</u> T7 <u>DBB/S</u> T7 <u>DCB/S</u> T7 <u>DDB/S</u> T7 <u>EDB/S</u>	B02	5,8	600	2200 ²⁾	1800	T7BB T7BBS 320 ¹⁾ Other pumps 300	T7BB T7BBS 290 Other pumps 275	240	210	175	140	
	B03	9,8										
	B04	12,8										
	B05	15,9										
	B06	19,8										
	B07	22,5										
	B08	24,9										
	B09	28,0										
	B10	31,8										
	B11	35,0										
	B12	41,0										
	B14	45,0						280	240			
	B15	50,0										
T6 <u>CC</u> T67 <u>CB</u> T67 <u>DC</u> T67 <u>EC</u> T7 <u>DCB/S</u> T7 <u>DCC/S</u> T67 <u>DDCS</u> T67 <u>EDC/S</u> T7 <u>EEC/S</u>	003	10,8	600	2200 ²⁾	1800	275	240	210	175	175	140	
	005	17,2										
	006	21,3										
	008	26,4										
	010	34,1										
	012	37,1										
	014	46,0										
	017	58,3										
	020	63,8										
	022	70,3										
	025	79,3										
	028	88,8										
	031	100,0										
T7 <u>DB/S</u> T67 <u>DC</u> T7 <u>DD/S</u> T7 <u>EDS</u> T7 <u>DBB/S</u> T7 <u>DCB/S</u> T7 <u>DCC/S</u> T7 <u>DDB/S</u> T67 <u>DDCS</u> T7 <u>EDB/S</u> T67 <u>EDC/S</u>	B14	44,0	600	2200 ²⁾	1800	300	250	240	210	175	140	
	B17	55,0										
	B20	66,0										
	B22	70,3										
	B24	81,1										
	B28	90,0										
	B31	99,2										
	B35	113,4										
	B38	120,6										
	B42	137,5										
	045¹⁾	145,7										
	050¹⁾	158,0										
T7 <u>EB/S</u> T67 <u>EC</u> T7 <u>EDS</u> T7 <u>EE/S</u> T7 <u>EEC/S</u> T67 <u>EDB/S</u> T67 <u>EDC/S</u>	042	132,3	600	2200 ²⁾	1800	240	210	210	175	175	140	
	045	142,4										
	050	158,5										
	052	164,8										
	054	171,0										
	057	183,3										
	062	196,7										
	066	213,3										
	072	227,1										
	085	268,7										

HF-0, HF-2 = Antiwear Petroleum Base
HF-1 = Non Antiwear Petroleum Base
HF-4 = Water Glycols Solutions
HF-5 = Synthetic Fluids

HF-3 = Water in oil Invert Emulsions

¹⁾ Please consult Parker for application over 300 bar.²⁾ Please consult Parker with higher speeds.³⁾ Please be sure that the inlet velocity is under 1,9 m/sec. (see page 12, start-up & check-up).

For further information or if the performance characteristics outlined above do not meet your particular requirements, please consult your local Parker office.



Minimum allowable inlet pressure (bar absolute)

Cartridge		Speed RPM										Series
Size	Series	1200	1500	1800	2100	2200	2300	2500	2800	3000	3600	
<u>A</u> S	B06	0,80	0,80	0,80	0,80	0,80	0,80	0,80	0,80	0,80	0,85	B06
	B10											B10
	B11											B11
	B13											B13
	B17											0,88
	B20											0,94
	B22											1,00
	B25											0,85
<u>A</u> SW	B26	0,80	0,80	0,80	0,80	0,80	0,80	0,80	0,80	0,80	0,80	B26
	B28											B28
	B30											B30
	B32											B32
	B34											0,88
	B36											0,94
	B40											1,00
<u>B</u>	B02	0,80	0,80	0,80	0,80	0,80	0,80	0,80	0,80	0,80	0,80	B02
	B03											B03
	B04											B04
	B05											B05
	B06											B06
	B07											B07
	B08											B08
	B09											B09
	B10											B10
	B11											B11
	B12											B12
	B14											B14
	B15											B15
<u>C</u>	003	0,80	0,80	0,80	0,80	0,80	0,90	1,00	1,00	1,00	1,00	003
	005											005
	006											006
	008											008
	010											010
	012											012
	014											014
	017											017
	020											020
	022											022
	025											025
	028											028
	031											031

Inlet pressure is measured at inlet flange with petroleum base fluids at viscosity between 10 and 65 cSt. The difference between inlet pressure at the pump flange and atmospheric pressure must not exceed 0,2 bar to prevent aeration.

Multiply absolute pressure by 1,25 for HF-3, HF-4 fluids.

by 1,35 for HF-5 fluid.

by 1,10 for ester or rapeseed base.

For double and triple pumps, prefer the cartridge requiring the highest absolute pressure.

Cartridge		Speed RPM										Series	
Size	Series	1200	1500	1800	2100	2200	2300	2500	2800	3000	3600		
D	B14	0,80	0,80	0,80	0,80	0,80	0,80	0,80	0,80	0,80		B14	
	B17								0,82	0,86		B17	
	B20								0,83	0,88		B20	
	B22								0,86	0,95		B22	
	B24								0,88	1,00		B24	
	B28								0,90	1,05		B28	
	B31								0,84	0,97		B31	
	B35								0,86	1,01		B35	
	B38								0,90			B38	
	B42								0,84			B42	
	045								0,98	1,05		B45	
E	050								1,02	1,09		B50	
	042	0,80	0,80	0,80	0,90	1,00						042	
	045											045	
	050											050	
	052											052	
	054											054	
	057											057	
	062											062	
	066	0,85	0,85	0,95	1,00	1,09						066	
	072											072	
	085											085	

Inlet pressure is measured at inlet flange with petroleum base fluids at viscosity between 10 and 65 cSt. The difference between inlet pressure at the pump flange and atmospheric pressure must not exceed 0,2 bar to prevent aeration.

Multiply absolute pressure by 1,25 for HF-3, HF-4 fluids.

by 1,35 for HF-5 fluid.

by 1,10 for ester or rapeseed base.

For double and triple pumps, prefer the cartridge requiring the highest absolute pressure.

MAIN CALCULATION*To resolve*Volumetric displ. ... V_i [ml/rev.]Available flow Q_{eff} [l/min]Input power P_{eff} [kW]

Performances required

Requested flow Q [l/min] 42Speed n [RPM] 1500Pressure p [bar] 250*Routine :*

$$1. \text{ First calculation } V_i = \frac{1000 Q}{n}$$

2. Choice V_i of pump immediately greater (see tabulation)

3. Theoretical flow of this pump

$$Q_{theo} = \frac{V_i \times n}{1000}$$

4. Find q_{vs} leakage function of pressure $q_{vs} = f(p)$ on curve at 10 or 24 cSt5. Available flow $Q_{eff} = Q_{theo} - q_{vs}$

6. Theoretical input power

$$P_{theo} = \frac{Q_{theo} \times p}{600}$$

7. Find P_s hydrodynamic power loss on curve8. Calculation of necessary input power $P_{eff} = P_{theo} + P_s$

9. Results

Example :

$$V_i = \frac{1000 \times 42}{1500} = 28 \text{ ml/rev.}$$

T7B B10, $V_i = 31,8 \text{ cm}^3/\text{rev.}$

$$Q_{theo} = \frac{31,8 \times 1500}{1000} = 47,7 \text{ l/min}$$

T7B (page 22) : $q_{vs} = 3 \text{ l/min}$ at 250 bar, 24 cSt


$$Q_{eff} = 47,7 - 3 = 44,7 \text{ l/min}$$

$$P_{theo} = \frac{47,7 \times 250}{600} = 19,9 \text{ kW}$$

T7B (page 22) : P_s at 1500 RPM, 250 bar = 1 kW

$$P_{eff} = 19,9 + 1 = 20,9 \text{ kW}$$

$$\begin{array}{ll} V_i & = 31,8 \text{ ml/rev.} \\ Q_{eff} & = 47,7 \text{ l/min} \\ P_{eff} & = 20,9 \text{ kW} \end{array} \quad \boxed{\text{T7B B10}}$$

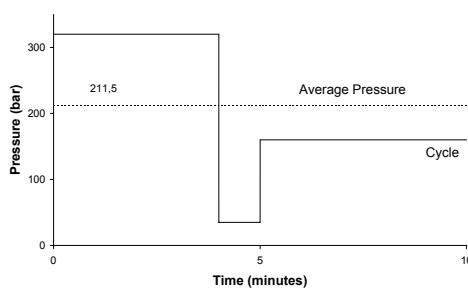*These calculation steps must be followed for each application.***INTERMITTENT PRESSURE RATING**

T7 and T67 units may be operated intermittently at pressures higher than the recommended continuous rating when the time weighted average of pressure is less than or equal to the continuous duty pressure rating. This intermittent pressure rating calculation is only valid when the other parameters : speed, fluid, viscosity and contamination level are respected.

For total cycle time longer than 15 minutes, please consult your Parker representative.

Example : T7B - B10


Duty cycle 4 min. at 320 bar

..... 1 min. at 35 bar

..... 5 min. at 160 bar

$$\frac{(4 \times 320) + (1 \times 35) + (5 \times 160)}{10} = 211,5 \text{ bar}$$

211,5 bar is lower than 290 bar allowed as continuous pressure for T7B - B10 with HF-0 fluid.

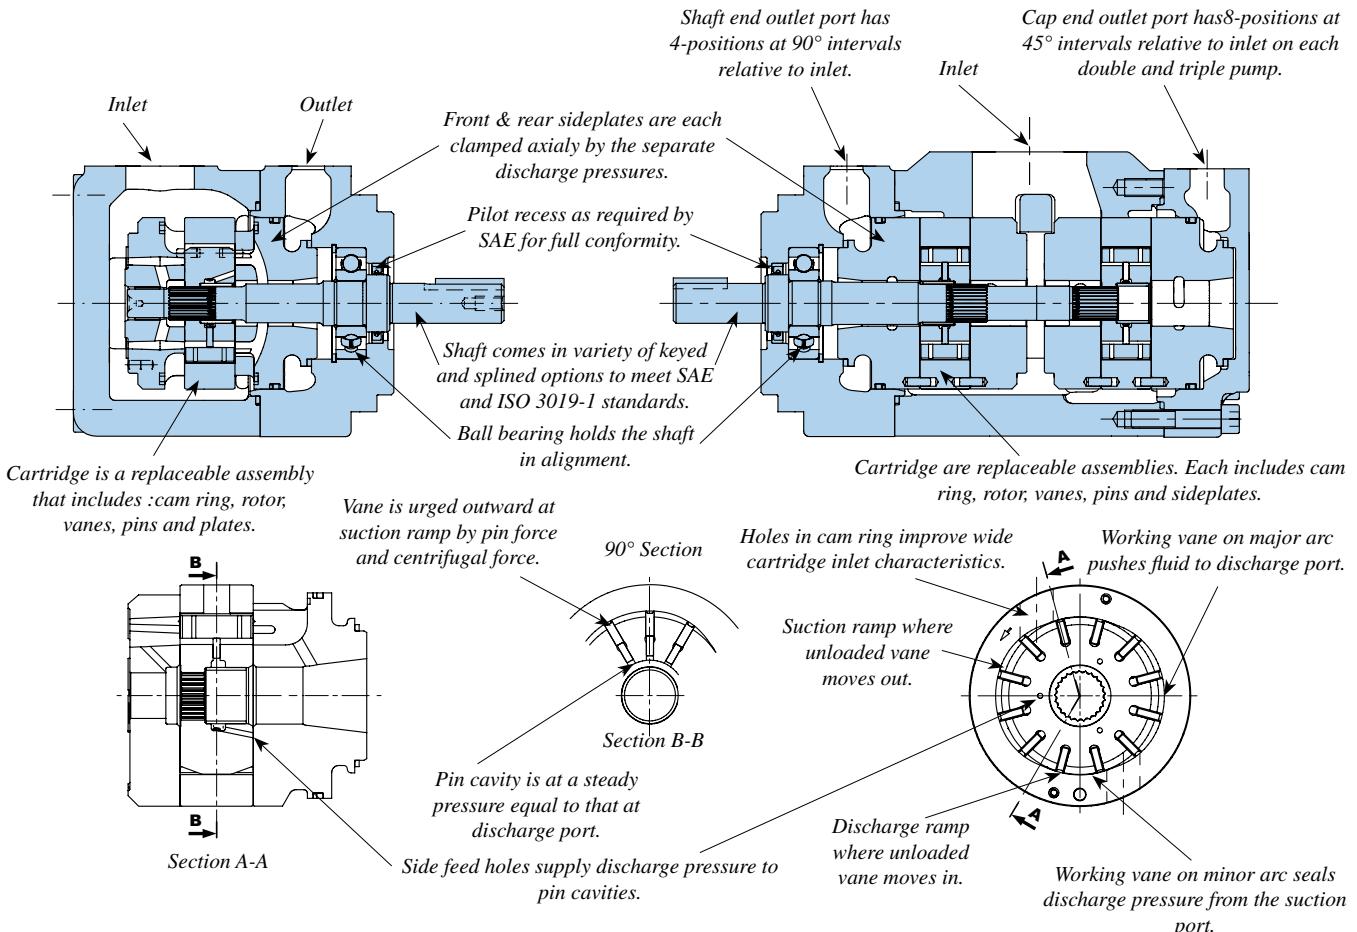**APPLICATION ADVANTAGES**

- The high pressure capability up to 320 bar, in the small envelope, reduces installation costs and provides extended life at reduced pressure.
- The high volumetric efficiency, reduces heat generation, and allows speeds down to 600 RPM at full pressure.
- The high mechanical efficiency, typically better than 94%, reduces energy consumption.
- The wide speed range (600 RPM at 3600 RPM), combined with large size cartridge displacements will optimize operation for the lowest noise level in the smallest envelope.
- The low speed (600 RPM), low pressure, high viscosity (860 cSt) allows application in cold environment with a minimum energy consumption and without risk of seizure.
- The low ripple pressure (± 2 bar) reduces piping noise and increases lifetime of the other components in the circuit.
- The high resistance to particle contamination, thanks to the double lip technology increasing the pump lifetime.
- The large variety of options (cam displacement, shaft, porting) allows customized installation.
- Noise : Specially designed to optimize the low noise level characteristics.
- Cartridge concept : drops maintenance costs.

GENERAL :

All Parker vane pumps are individually tested to provide the best quality & reliability. Modifications, conversions & repairs can only be done by authorized dealers or OEM to avoid invalidation of the guarantee.

The pumps are to be used in the design limits indicated in all the sales bulletins. Please contact Parker when trespassing the catalogue limits.

Do not modify or work on the pump under pressure or when the electric motor (or any drive) is on.

Qualified personnel is required to assemble and set-up hydraulic devices. Always conform yourself to the valid regulations (safety, electrical, environment...).

The following instructions are important to follow to obtain a good service life time from the unit.

ROTATION & PORTS INDICATION

The rotation and ports orientation are viewed from the shaft end.

CW stands for clockwise = right-hand rotation.

CCW stands for counter-clockwise = left-hand rotation.

START-UP CHECK-UP**Check that the assembly of the power unit is correct :**

The distance between the suction pipe & the return lines in the tank should be at its maximum.

A bevel on both suction & return lines is recommended to increase the surface and so lower the velocity. We suggest a 45° minimum angle.

Velocities : inlet $0,5 < x < 1,9 \text{ m/s}$ (1,64 $< x < 6,23 \text{ ft per sec.}$)

: return $x < 6 \text{ m/s}$ ($x < 19,7 \text{ ft per sec.}$)

: Always insure that all return and suction lines are under the oil level to avoid forming aeration or vortex effect. This should be done under the most critical situation (all cylinders extended for example). Straight and short pipes are the best.

$$V = \frac{Q (\text{Lpm})}{6 \times \pi \times r^2 (\text{cm})} = \text{m/s} \quad V = \frac{Q (\text{GPM})}{3.12 \times \pi \times r^2 (\text{in})} = \text{ft/s}$$

The size of the air filter should be 3 times greater than the max. instant return flow (all cylinders in movement for example).

If the pump is in the tank, please choose the NOP option (no paint) and use a short inlet pipe.

Parker does not recommend inlet strainers. If needed, a 100 mesh (149 microns) is the finest mesh recommended.

A coaxial drive is recommended. For any other type of drives, please contact Parker.

Make sure that all protective plugs & covers have been removed.

Check the pump rotation versus the E-motor or engine rotation.

Start-up :

The tank has been filled up with a clean fluid in proper conditions.

We recommend to flush the system with an external pump prior to the start-up.

It is important to bleed the air off the circuit & the pump itself.

The first valve on the circuit should be open to tank.

We recommend the use of air bleed off valves.

It is possible to bleed off the air by creating a leak in the P port of the pump. **Warning : this has to be done in a low pressure mode as it could create a dangerous fluid leak. Make sure that the pressure cannot rise (open center valve to tank, pressure relief valve unloaded ...).**

When oil free of air appears, tighten the connectors to the correct torque.

The pump should prime within a few seconds. If not, please consult our troubleshooting guide (document 1 - EN0721 - *).

If the pump is noisy, please troubleshoot the system.

Never operate the pump at top speed and pressure without checking the completion of pump priming.

SHAFT & COUPLING DATA :

COUPLINGS AND FEMALE SPLINES

- The mating female spline should be free to float and find its own center. If both members are rigidly supported, they must be aligned within 0,15 TIR (0,006" TIR) or less to reduce fretting. The angular alignment of two splines axes must be less than $\pm 0,05$ per 25,4 radius ($\pm 0,002"$ per 1" radius).
- The coupling spline must be lubricated with a lithium molydisulfide grease, disulfide of molybdenum or a similar lubricant.
- The coupling must be hardened to a hardness between 29 and 45 HRC.
- The female spline must be made to conform to the Class 1 fit as described in SAE-J498b (1971). This is described as a Flat Root Side Fit.

KEYED SHAFTS

Parker supplies the T7 series keyed shaft pumps with high strength heat-treated keys. Therefore, when installing or replacing these pumps, the heat-treated keys must be used in order to ensure maximum life in the application. If the key is replaced, it must be a heat-treated key between 27 and 34 R.C. hardness. The corners of the keys must be chamfered by 0,76 mm to 1,02 mm (0,03 to 0,04) at 45° to clear the radii in the key way.

The alignment of keyed shafts must be within tolerances given for splined shafts here above.

SHAFT LOADS

These products are primarily designed for coaxial drives which do not impose axial or side loading on the shaft. Contact Parker for specific applications.

SPECIFIC POINTS :

MINIMUM INLET PRESSURE

Please read the charts in the sales leaflets as the minimum requested inlet pressure varies versus the displacement and the speed.

Never go under 0,8 bar Absolute (-0,2 bar relative)
11.6 PSI Absolute (-2.9 PSI G).

MAXIMUM INLET PRESSURE

It is recommended to always have at least 1,5 bar (22 PSI) differential between inlet and outlet.

Standard shaft seals are limited to 0,7 bar (10 PSI G) but some allow 7 bar (100 PSI G). Please contact Parker for more information.

MINIMUM OUTLET PRESSURE

It is recommended to always have at least 1,5 bar (22 PSI) differential between inlet and outlet.

When assembled vertically, always be careful to prevent any air from being trapped in the pump (behind the shaft seal for example).

VERTICAL MOUNT

FLUIDS :

DENISON CLASSIFICATION

Type of fluids : For each type of fluids, Parker vane pumps will have different pressures, speeds & temperature limits. Please refer to the sales leaflets.

- HF-0 = Anti-wear petroleum base.
- HF-1 = Non anti-wear petroleum base.
- HF-2 = Anti-wear petroleum base.
- HF-3 = Water-in-oil invert emulsions.
- HF-4 = Water glycol solutions.
- HF-5 = Synthetic fluids.

FILTRATION RECOMMENDATIONS

NAS 1638 class 8 or better.

ISO 19 / 17 / 14 or better.

Inlet strainer : Parker does not recommend inlet strainers.

If requested, a 100 mesh (149 microns) is the finest mesh recommended.

RECOMMENDED FLUIDS

Petroleum based antiwear R & O fluids.

These fluids are the recommended fluids for pumps & motors. Maximum catalogue (UK version) ratings and performance datas are based on operation with these fluids. These fluids are covered by Denison HF-0 and HF-2 specifications.

ACCEPTABLE ALTERNATE FLUIDS

The use of fluids other than petroleum based antiwear R & O fluids requires that the maximum ratings of the pumps will be reduced. In some cases the minimum replenishment pressures must be increased. Consult specific sections for more details.

VISCOSITY

	Industrial
Max. (cold start, low speed & pressure)	860 cSt - 3900 SUS
Max. (full speed & pressure)	108 cSt - 500 SUS
Optimum (max. life)	30 cSt - 140 SUS
Min. (full speed & pressure for HF-1, HF-3, HF-4 & HF-5 fluids)	18 cSt - 90 SUS
Min. (full speed & pressure for HF-0 & HF-2 fluids)	10 cSt - 60 SUS

90 min. Higher values extend the range of operating temperatures.

VISCOSITY INDEX

The usual limiting factor of temperature (low or high) comes from the obtained viscosity. The seals are sometimes the limit : standard seals range from -30° C to 90° C (-9.4° F to 194° F).

TEMPERATURES

	° C	° F
Maximum fluid temperature (θ)	° C	° F
HF-0, HF-1, HF-2	+ 100	+ 212
HF-3, HF-4	+ 50	+ 122
HF-5	+ 70	+ 158
Biodegradable fluids (esters & rapeseed base)	+ 65	+ 149
Minimum fluid temperature (θ)	° C	° F
(also depend on max. viscosity)		
HF-0, HF-1, HF-2, HF-5	- 18	- 0.4
HF-3, HF-4	+ 10	+ 50
Biodegradable fluids (esters & rapeseed base)	- 18	- 0.4

Over or under these values, please contact Parker.

WATER CONTAMINATION IN THE FLUID

Maximum acceptable content of water :

- 0,10 % for mineral base fluids.
 - 0,05 % for synthetic fluids, crankcase oils, biodegradable fluids.
- If the amount of water is higher, then it must be drained off the circuit.

FLUID POWER FORMULAS

Pump input torque	N.m	$\frac{\text{pressure (bar)} \times \text{displacement cm}^3/\text{rev}}{20 \pi \times \text{mech. eff.}}$
Pump input power	kW	$\frac{\text{rpm} \times (\text{cm}^3/\text{rev}) \times \text{pressure (bar)}}{600000 \times \text{overall eff.}}$
Pump output flow	Lpm	$\frac{\text{rpm} \times (\text{cm}^3/\text{rev}) \times \text{volumetric eff.}}{1000}$
Fluid motor speed	rpm	$\frac{1000 \times \text{flow rate (Lpm)} \times \text{volumetric eff.}}{\text{displacement (cm}^3/\text{rev.)}}$
Fluid motor torque	N.m	$\frac{\text{pressure (bar)} \times \text{displacement (cm}^3/\text{rev)} \times \text{mech. eff.}}{20 \pi}$
Fluid motor power	kW	$\frac{\text{rpm} \times (\text{cm}^3/\text{rev}) \times (\text{bar}) \times \text{overall eff.}}{600000}$

General characteristics**Hydraulic Pumps
T7/T67/T6C Industrial, Denison Vane Pumps**

	Mounting standard	Weight without connector and bracket - kg	Moment of inertia Kgm ² x 10 ⁻⁴	SAE 4 bolts - J518 - 1S0/DIS6162-1		
				Suction	Pressure	
				S	P1	P2
T7AS	SAE J744 SAE A	9,5	2,6	1"-SAE 4 bolts J518-ISO/DIS 6162-1	3/4"-SAE 4 bolts J518-ISO/DIS 6162-1	
				SAE 16-SAE threads 1.5/16"-12 UNF-2B	SAE 12-SAE threads 1.1/16"-12 UNF-2B	
				NPTF threads 1.1/4" NPTF	NPTF threads 3/4" NPTF	
				1" BSP	3/4" BSP	
T7ASW	SAE J744 SAE A	11,3	3,2	1.1/4"-SAE 4 bolts J518-ISO/DIS 6162-1	3/4"-SAE 4 bolts J518-ISO/DIS 6162-1	
				SAE 20-SAE threads 1.5/8"-12 UNF-2B	SAE 12-SAE threads 1.1/16"-12 UNF-2B	
				NPTF threads 1.1/4" NPTF	SAE 12-SAE threads 1.1/16"-12 UNF-2B	
				1.1/4" BSP	3/4" BSP	
T7B	ISO/3019-2 100 A2 HW	23,0	3,2	1.1/2"	1" or 3/4"	
T7BS	SAE J744 SAE B					
T6C	SAE J744 SAE B	15,7	7,5	1.1/2"	1"	
T7D	ISO 3019-2 125 A2 HW	26,0	19,6	2"	1.1/4"	
T7DS	SAE J744 SAE C					
T7E	ISO 3019-2 125 A2 HW	43,3	62,5	3"	1.1/2"	
T7ES	SAE J744 SAE C					
				S	P1	P2
T7BB	ISO 3019-2 100 A2 HW	32,6	6,7	2.1/2"	1" or 3/4"	3/4"
T7BBS	SAE J744 SAE B					
T6CC	SAE J744 SAE B	26,0	16,9	2.1/2" or 3"	1"	1" or 3/4"
T67CB	SAE J744 SAE B	26,0	11,4	2.1/2"	1"	3/4"
T7DB	ISO 3019-2 125 A2 HW	38,6	22,7	3"	1.1/4"	1" or 3/4"
T7DBS	SAE J744 SAE C					
T67DC	SAE J744 SAE C	38,6	26,3	3"	1.1/4"	1" or 3/4"
T7DD	ISO 3019-2 125 A2 HW 125 B4HW	56,0	36,3	4"	1.1/4"	1.1/4"
T7DDS	SAE J744 SAE C					
T7EB	ISO 3019-2 125 A2 HW	55,0	65,9	3.1/2"	1.1/2"	3/4"
T7EBS	SAE J744 SAE C					
T67EC	SAE J744 SAE C	55,0	70,8	3.1/2"	1.1/2"	1"
T7ED	ISO 3019-2 125 A2 HW	66,0	79,7	4"	1.1/2"	1.1/4"
T7EDS	SAE J744 SAE C					
T7EE	ISO 3019-2 250 B4 HW	95,0	97,4	4"	1.1/2"	1.1/2"
T7EES	SAE J744 SAE E					

	Mounting standard	Weight without connector and bracket - kg	Moment of inertia Kgm ² x 10 ⁻⁴	SAE 4 bolts - J518 - 1S0/DIS6162-1			
				Suction		Pressure	
				S	P1	P2	P3
T7DBB	ISO/3019-2 125 A2 HW 125 B4 HW	61,0	26,1	4"	1.1/4"	1"	1" or 3/4"
T7DBBS	SAE J744 SAE C						
T7DCB	ISO/3019-2 125 A2 HW 125 B4 HW						
T7DCBS	SAE J744 SAE C	33,3	29,7	4"	1.1/4"	1"	1" or 3/4"
T7DCC	ISO/3019-2 125 A2 HW 125 B4 HW						
T7DCCS	SAE J744 SAE C						
T7ddb	ISO/3019-2 125 A2 HW 125 B4 HW	66,0	39,5	4"	1.1/4"	1.1/4"	1" or 3/4"
T7ddbs	SAE J744 SAE C						
T67ddcs	SAE J744 SAE C						
T7edb	ISO 3019-2 250 B4 HW	102,0	76,6	4"	1.1/2"	1.1/4"	1" or 3/4"
T7edbs	SAE J744 SAE E						
T67edc	ISO 3019-2 250 B4 HW	102,0	80,2	4"	1.1/2"	1.1/4"	1" or 3/4"
T67edcs	SAE J744 SAE E						
T7eec	ISO/3019-2 250 B4 HW	114,8	99,1	4"	1.1/2"	1.1/2"	1" or 3/4"
T7eeecs	SAE J744 SAE E						

Model No.

T7AS - B17 - 1 R 00 - A 1 - 00 - ..

T7AS series - SAE A 2 bolts _____

J744 mounting flange

Displacement * _____

Volumetric displacement (ml/rev.)

B06 = 5,8

B10 = 9,8

B11 = 11,0

B13 = 12,8

B17 = 17,2

B20 = 19,8

B22 = 22,5

B25 = 24,9

Type of shaft T7AS _____

1 = keyed (non SAE) Ø 19,05

3 = splined 16/32 (SAE B) 13 teeth

4 = splined 16/32 (SAE A) 9 teeth

Direction of rotation (shaft end view) _____

R = Clockwise

L = Counter-clockwise

Modifications

Mounting w/connection variables

00 = 4 bolts SAE flanges (J518) UNC thread

S = 1" SAE

P = 3/4" SAE

02 = SAE thread

S = 1.5/16" (SAE 16)

P = 1.1/16" (SAE 12)

03 = NPTF thread

S = 1.1/4" NPTF

P = 3/4" NPTF

04 = BSP threads

S = 1" BSP

P = 3/4" BSP

Seal class

1 = S1 BUNA N - 0,7 bar max. (for mineral oil)

5 = S5 VITON® - 0,7 bar max. (for mineral oil and fire resistant fluids)


Design letter

Porting combination


00 = standard

P = Pressure

S = Suction

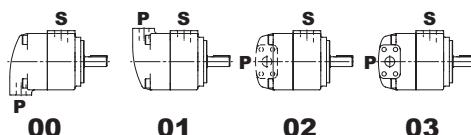


INTERNAL LEAKAGE (TYPICAL)

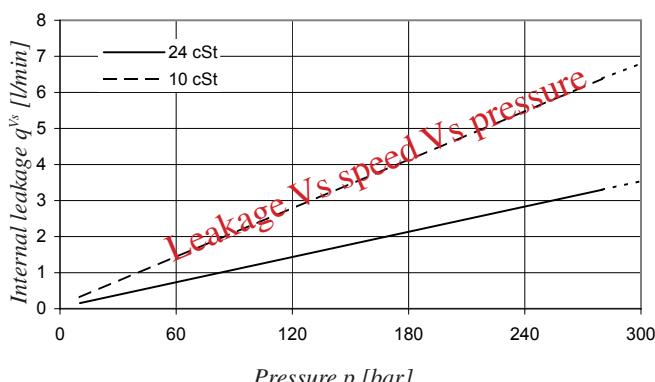


Do not operate pump more than 5 seconds at any speed or viscosity if internal leakage is higher than 50% of theoretical flow.

POWER LOSS HYDROMECHANICAL (TYPICAL)

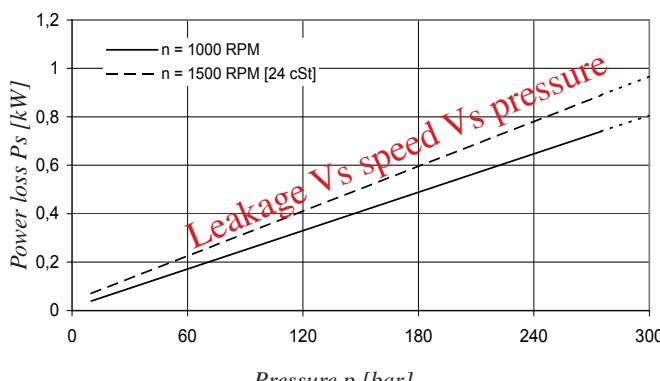


* Cartridge designation is now in ml/rev. (example : B22 = 22,5 ml/rev.)


NOISE LEVEL (TYPICAL) - T7AS - B20

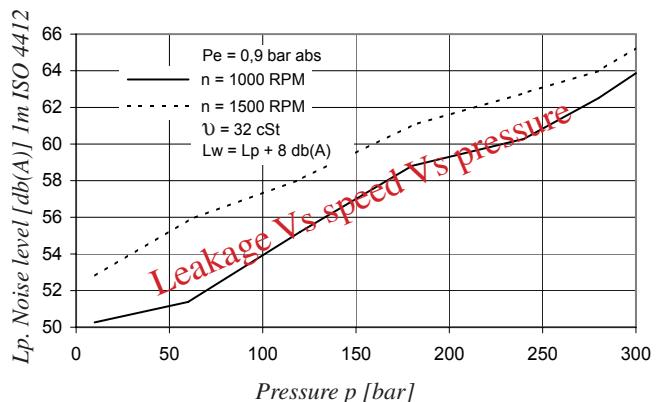

PERMISSIBLE RADIAL LOAD


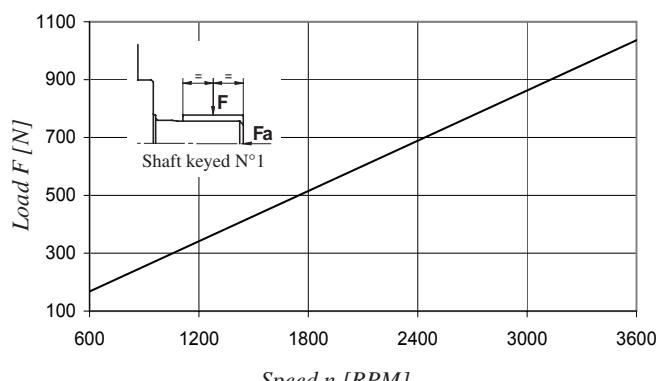


Maximum permissible axial load Fa = 600 N

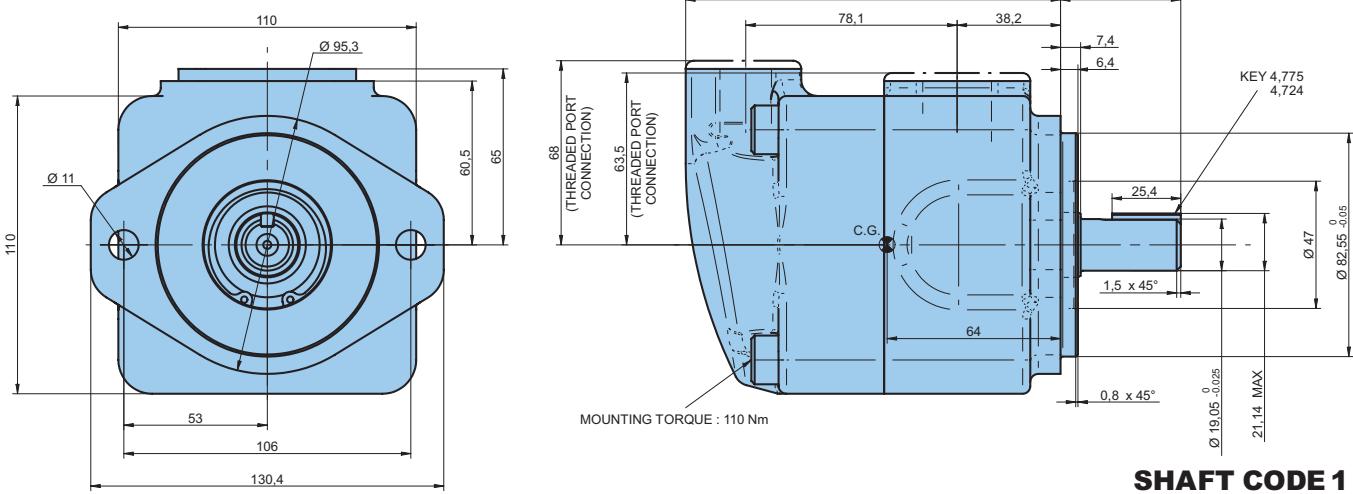
**SHAFT CODE 1**

Keyed (non SAE)

Option : built in valve

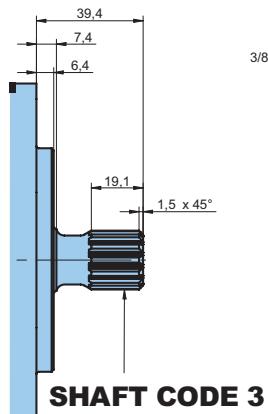**SHAFT CODE 3**

SAE B splined shaft
Class 1 - J498
16/32 d.p. - 13 teeth
30° pressure angle
flat root side fit

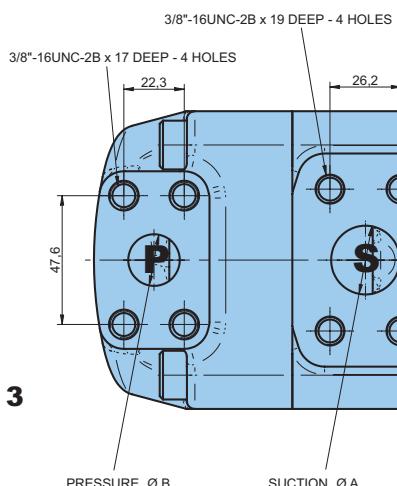**SHAFT CODE 4**

SAE A splined shaft
Class 1 - J498
16/32 d.p. - 9 teeth
30° pressure angle
flat root side fit

Code	00	02	03	04
A	Ø 25,40	SAE # 16 1.5/16" - 12 UNF - 2B	1.1/14" NPTF	1" BSP
B	Ø 19,05	SAE # 12 1.1/16" - 12 UNF - 2B	3/4" NPTF	3/4" BSP

Shaft torque limits [ml/rev. x bar]	
Shaft	Vi x p max.
1	8720
3	8720
4	6550



If inlet velocity > 1,9 m/s, please contact Parker.

OPERATING CHARACTERISTICS - TYPICAL [24 cSt]

Pressure port	Series	Vi Volumetric displacement	Flow q_{V_e} [l/min] & n = 1500 RPM			Input power P [kW] & n = 1500 RPM		
			p = 0 bar	p = 140 bar	p = 300 bar	p = 7 bar	p = 140 bar	p = 300 bar
T7AS	B06	5,8 ml/rev	8,7	7,0	5,2	0,2	2,7	6,0
	B10	9,8 ml/rev	14,7	13,0	11,2	0,3	4,1	9,0
	B11	11,0 ml/rev	16,5	14,8	13,0	0,4	4,5	9,9
	B13	12,8 ml/rev	19,2	17,5	15,7	0,4	5,1	11,3
	B17	17,2 ml/rev	25,8	24,1	22,3	0,5	6,6	14,6
	B20	19,8 ml/rev	29,7	28,0	26,2	0,6	7,6	16,5
	B22	22,5 ml/rev	33,8	32,1	30,2	0,6	8,5	18,6
	B25	24,9 ml/rev	37,4	35,7	33,8 ¹⁾	0,7	9,3	20,4 ¹⁾

¹⁾ B25 = 275 bar max. int.

Model No.**T7ASW - B32 - 1 R 00 - A 1 - 00 - ..**

T7ASW series - SAE A 2 bolts

J744 mounting flange

Displacement *

Volumetric displacement (ml/rev.)

B26 = 26,0

B28 = 28,0

B30 = 30,0

B32 = 31,8

B34 = 34,0

B36 = 36,0

B40 = 40,0

Type of shaft T7ASW

1 = keyed (non SAE) Ø 19,05

3 = splined 16/32 (SAE B) 13 teeth

4 = splined 16/32 (non SAE) 11 teeth

Direction of rotation (shaft end view)

R = Clockwise

L = Counter-clockwise

Modifications**Mounting w/connection variables**

00 = 4 bolts SAE flanges (J518) UNC threads

S = 1.1/4" SAE

P = 3/4" SAE

02 = SAE thread

S = 1.5/8" (SAE 20)

P = 1.1/16" (SAE 12)

03 = NPTF & SAE threads

S = 1.1/4" NPTF

P = 1.1/16" (SAE 12)

04 = BSP threads

S = 1.1/4" BSP




P = 3/4" BSP

Seal class



1 = S1 BUNA N - 0,7 bar max. (for mineral oil)

Design letter**Porting combination**

00 = standard

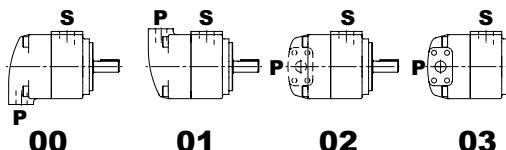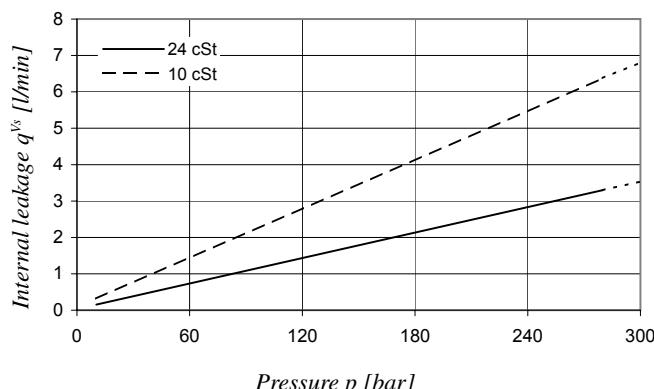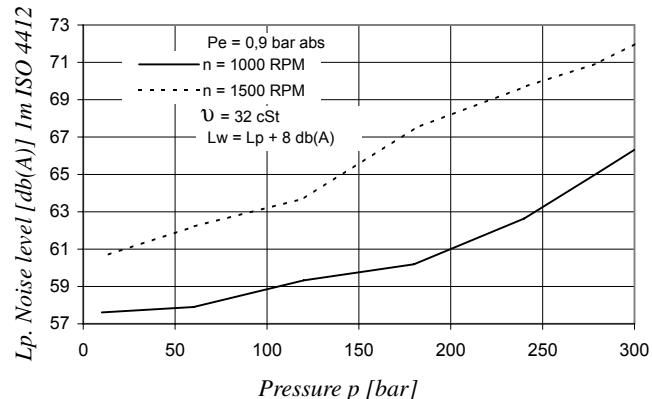P = Pressure
S = Suction**INTERNAL LEAKAGE (TYPICAL)****NOISE LEVEL (TYPICAL) - T7ASW B28**

Do not operate pump more than 5 seconds at any speed or viscosity if internal leakage is higher than 50% of theoretical flow.

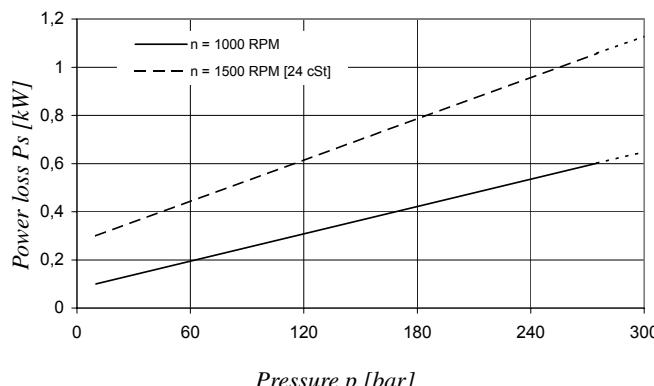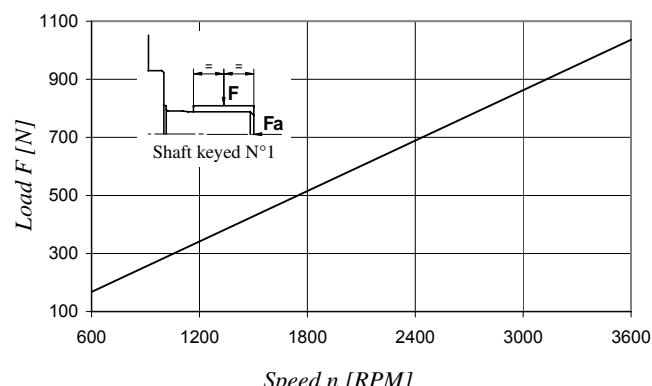
POWER LOSS HYDROMECHANICAL (TYPICAL)**PERMISSIBLE RADIAL LOAD**

Pressure p [bar]

Speed n [RPM]

* Cartridge designation is now in ml/rev. (example : B26 = 26 ml/rev.)

Maximum permissible axial load Fa = 800 N

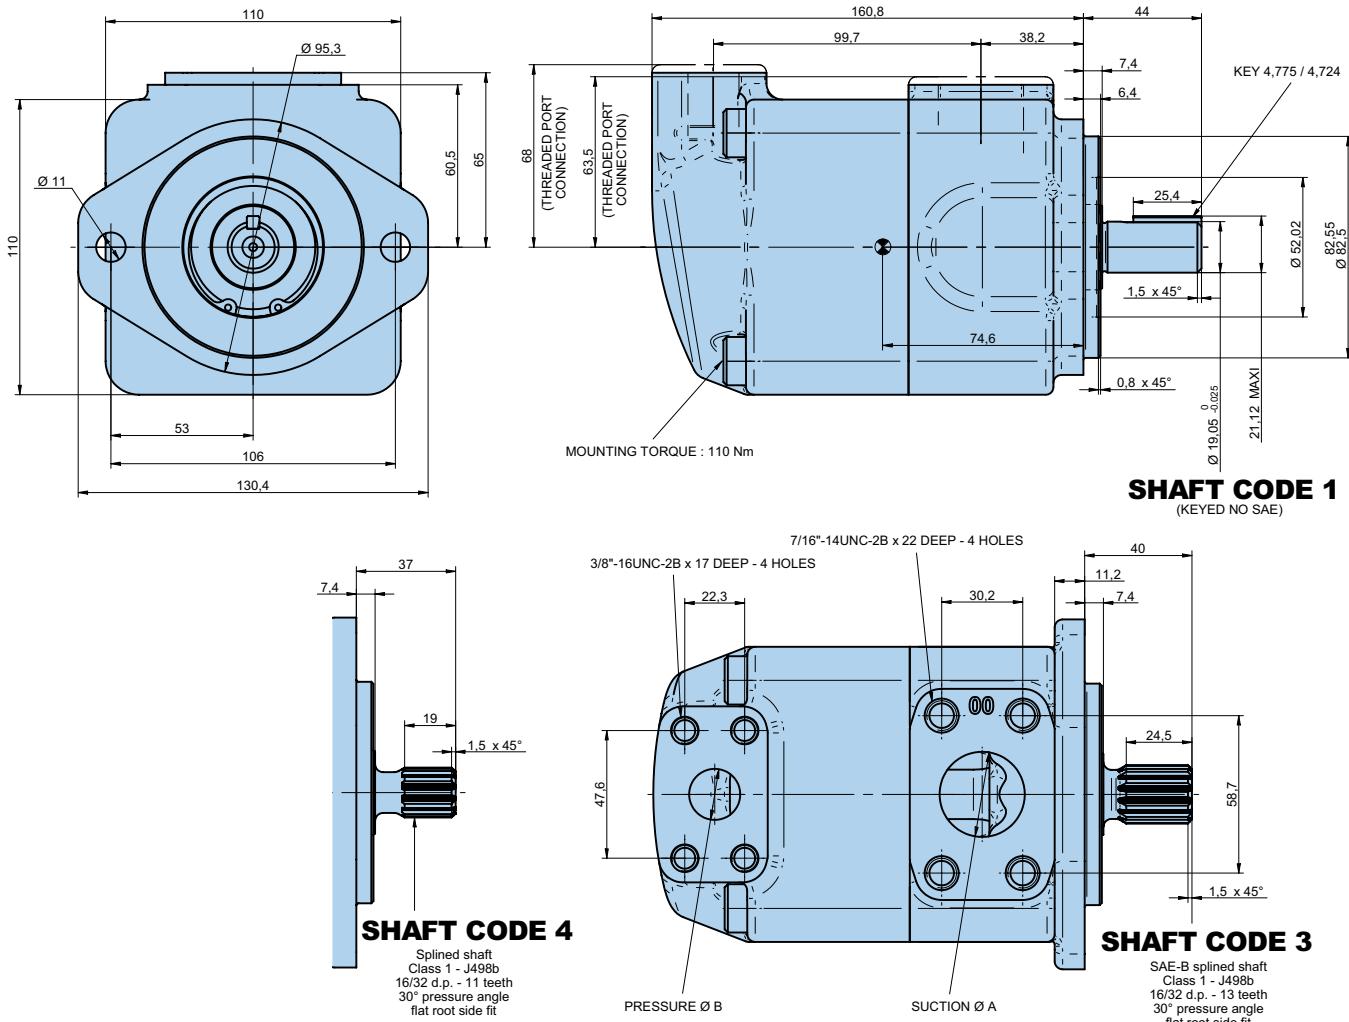

Code	00	02	03	04
A	Ø 31,80	SAE # 20 1.5/8" - 12 UNF - 2B	1.1/14" NPTF	1.1/4" BSP
B	Ø 19,05	SAE # 12 1.1/16" - 12 UNF - 2B	SAE # 12 1.1/16" - 12 UNF - 2B	3/4 " BSP

Shaft torque limits [ml/rev. x bar]	
Shaft	Vi x p max.
1	18530
3	18530
4	12660



If inlet velocity > 1,9 m/s, please contact Parker.

OPERATING CHARACTERISTICS - TYPICAL [24 cSt]

Pressure port	Series	Vi Volumetric displacement	Flow q_{V_e} [l/min] & n = 1500 RPM			Input power P [kW] & n = 1500 RPM		
			p = 0 bar	p = 140 bar	p = 300 bar	p = 7 bar	p = 140 bar	p = 300 bar
T7ASW	B26	26,0 ml/rev	39,0	37,3	35,5	0,8	9,5	20,6
	B28	28,0 ml/rev	42,0	40,3	38,5	0,9	10,2	22,1
	B30	30,0 ml/rev	45,0	43,3	41,5	0,9	10,9	23,6
	B32	31,8 ml/rev	47,7	46,0	44,2	0,9	11,6	25,0
	B34	34,0 ml/rev	51,0	49,3	47,5 ¹⁾	1,0	12,3	26,6 ¹⁾
	B36	36,0 ml/rev	54,0	52,3	50,5 ¹⁾	1,0	13,0	28,1 ¹⁾
	B40	40,0 ml/rev	60,0	58,3	56,5 ¹⁾	1,1	14,4	31,1 ¹⁾

¹⁾ B34 - B36 - B40 = 280 bar max. int.

Model No.**T7B or T7BS - B10 - 1 R 00 - A 1 - M0 - ..****T7B series - 100 A2 HW**

ISO 2 bolts 3019-2 mounting flange

T7BS series - SAE B 2 bolts

J744 mounting flange

Displacement

Volumetric displacement (ml/rev.)

B02 = 5,8	B07 = 22,5	B11 = 35,0
B03 = 9,8	B08 = 24,9	B12 = 41,0
B04 = 12,8	B09 = 28,0	B14 = 45,0
B05 = 15,9	B10 = 31,8	B15 = 50,0
B06 = 19,8		

Type of shaft T7B - T7BS

2 = keyed (ISO R775)

Type of shaft T7BS

1 = keyed (SAE B) Ø 22,2

3 = splined (SAE B) 13 teeth

4 = splined (SAE BB) 15 teeth

Modifications**Mounting w/connection variables**

4 bolts SAE flange J518

	T7B-T7BS		T7BS	
	Metric thread	UNC thread	00	01
P	1"	3/4"	1"	3/4"
S			1.1/2"	

Seal class

1 = S1 BUNA N - 0,7 bar max. (for mineral oil)

4 = S4 EPDM - 0,7 bar max. (for fire resistant fluids)

5 = S5 VITON® - 0,7 bar max. (for mineral oil and fire resistant fluids)

Design letter**Porting combination**

00 = standard



Direction of rotation (shaft end view)

R = Clockwise




L = Counter-clockwise

P = Pressure port





S = Suction port

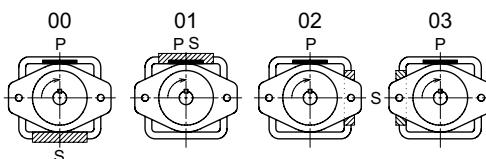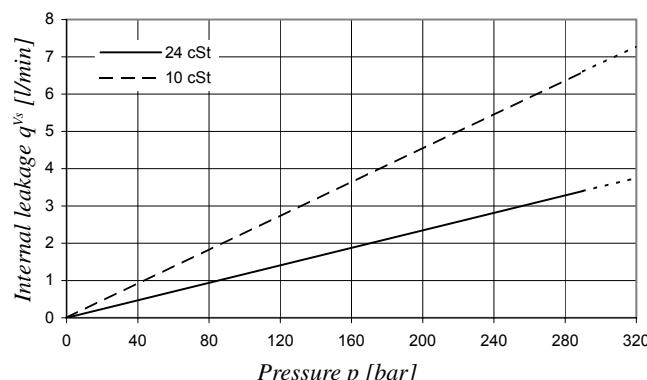**INTERNAL LEAKAGE (TYPICAL)**

Do not operate pump more than 5 seconds at any speed or viscosity if internal leakage is higher than 50% of theoretical flow.

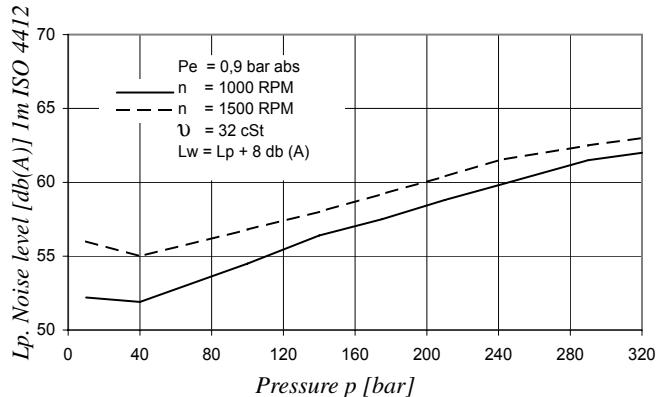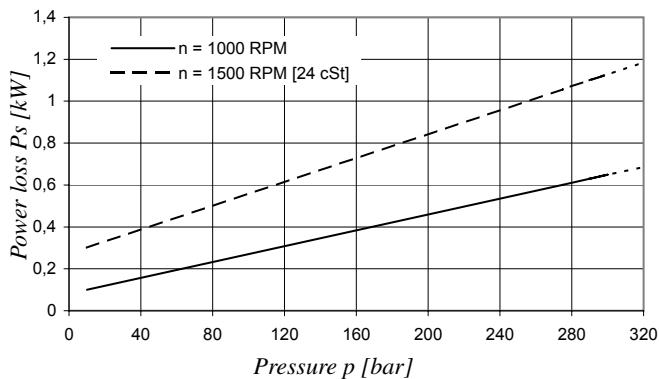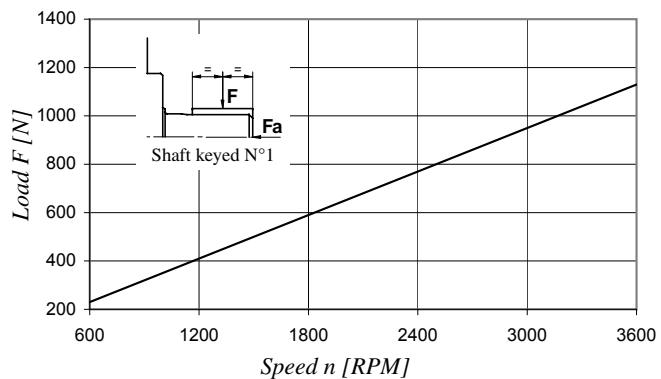NOISE LEVEL (TYPICAL) - T7B - B10**POWER LOSS HYDROMECHANICAL (TYPICAL)****PERMISSIBLE RADIAL LOAD**

Maximum permissible axial load $F_a = 800 \text{ N}$

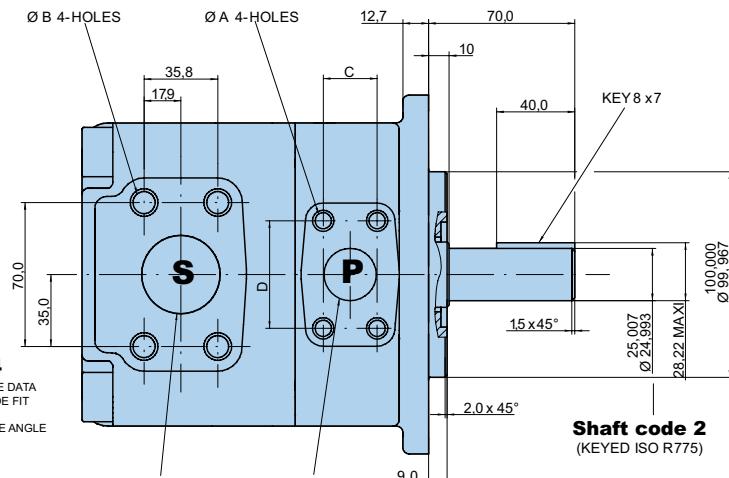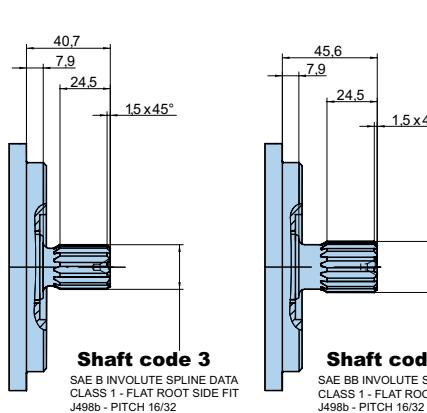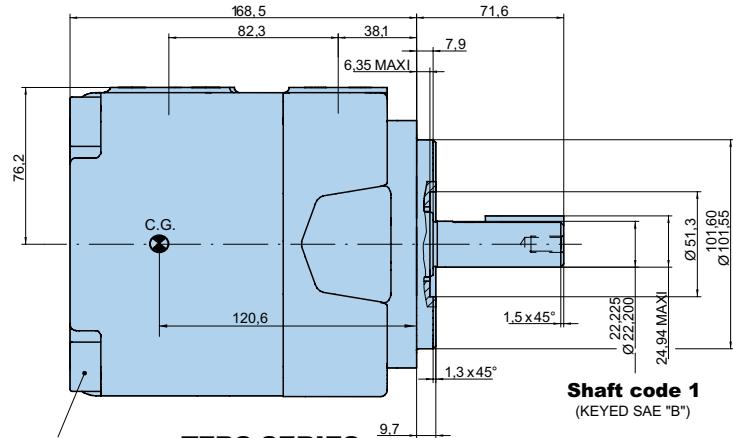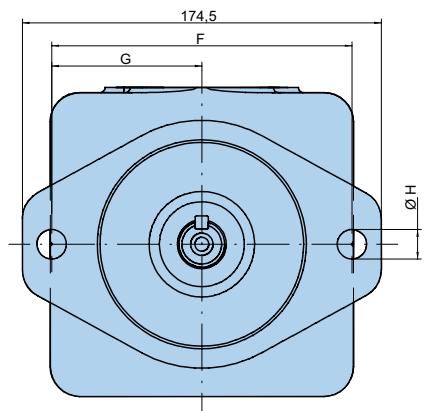

Model	T7B		T7BS	
Code	M0	M1	00	01
Ø A	M10 x 19 deep		3/8"-16 UNC x 19 deep	
Ø B	M12 x 22,4 deep		1/2"-13 UNC x 22,4 deep	
C	26,20	22,25	26,20	22,25
D	52,4	47,65	52,4	47,65
Ø E	25,4	19,1	25,4	19,1
F	140		146	
G	70		73	
Ø H	14,0		14,3	

Shaft torque limits [ml/rev. x bar]	
Shaft	Vi x p max.
1	16500
2	20600
3	20600
4	20600

OPERATING CHARACTERISTICS - TYPICAL [24 cSt]

Pressure port	Series	Vi Volumetric displacement	Flow q_{V_e} [l/min] & n = 1500 RPM			Input power P [kW] & n = 1500 RPM		
			p = 0 bar	p = 140 bar	p = 320 bar	p = 7 bar	p = 140 abr	p = 320 bar
T7B T7BS	B02	5,8 ml/rev	8,7	7,0	4,8	0,5	2,6	5,4
	B03	9,8 ml/rev	14,7	13,0	10,8	0,6	4,0	8,6
	B04	12,8 ml/rev	19,2	17,5	15,3	0,6	5,0	11,0
	B05	15,9 ml/rev	23,9	22,2	20,0	0,7	6,1	13,5
	B06	19,8 ml/rev	29,7	28,0	25,8	0,7	7,5	16,6
	B07	22,5 ml/rev	33,7	32,0	29,9	0,8	8,5	18,8
	B08	24,9 ml/rev	37,4	35,7	33,5	0,8	9,3	20,7
	B09	28,0 ml/rev	42,0	40,3	38,1	0,9	10,4	23,2
	B10	31,8 ml/rev	47,7	46,0	43,8	0,9	11,7	26,2
	B11	35,0 ml/rev	52,5	50,8	48,9 ¹⁾	1,0	12,8	27,0 ¹⁾
	B12	41,0 ml/rev	61,5	59,8	57,9 ¹⁾	1,1	14,9	31,5 ¹⁾
	B14	45,0 ml/rev	67,5	65,8	63,9 ¹⁾	1,2	16,3	34,5 ¹⁾
	B15	50,0 ml/rev	75,0	73,3	71,6 ²⁾	1,3	18,1	35,7 ²⁾

1) B11 - B12 - B14 = 300 bar max. int.

2) B15 = 280 bar max. int.

Model No.

T6C* - 022 - 1 R 00 - B 1 - ..

Series - SAE B 2 bolts

J744 mounting flange

* Rear drive option available, please contact Parker

Displacement

Volumetric displacement (ml/rev.)

003 = 10,8	017 = 58,3
005 = 17,2	020 = 63,8
006 = 21,3	022 = 70,3
008 = 26,4	025 = 79,3
010 = 34,1	028 = 88,8
012 = 37,1	031 = 100,0
014 = 46,0	


Type of shaft

1 = keyed (SAE B) Ø 22,2

2 = keyed (non SAE)

3 = splined (SAE B) 13 teeth

4 = splined (SAE BB) 15 teeth

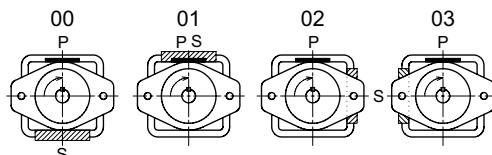

Modifications

Seal class

- 1 = S1 BUNA N - 0,7 bar max. (for mineral oil)
- 4 = S4 EPDM - 7 bar max. (for fire resistant fluids)
- 5 = S5 VITON® - 7 bar max. (for mineral oil and fire resistant fluids)

Design letter

Porting combination


00 = standard

Direction of rotation (shaft end view)


R = Clockwise

L = Counter-clockwise

INTERNAL LEAKAGE (TYPICAL)

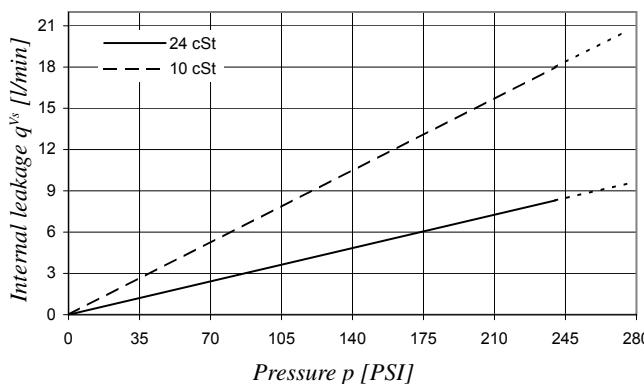


NOISE LEVEL (TYPICAL) - T6C - 022

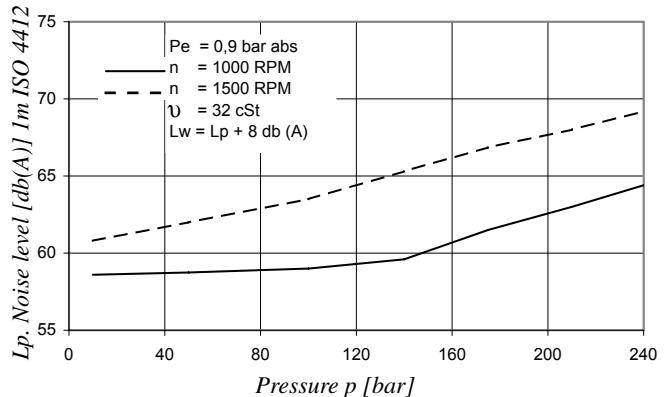


Do not operate pump more than 5 seconds at any speed or viscosity if internal leakage is higher than 50% of theoretical flow.


POWER LOSS HYDROMECHANICAL (TYPICAL)

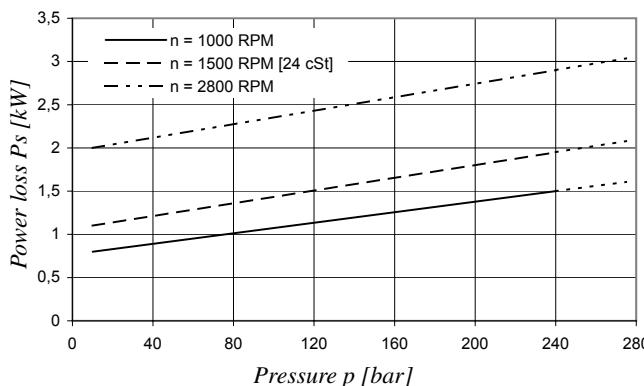

PERMISSIBLE RADIAL LOAD

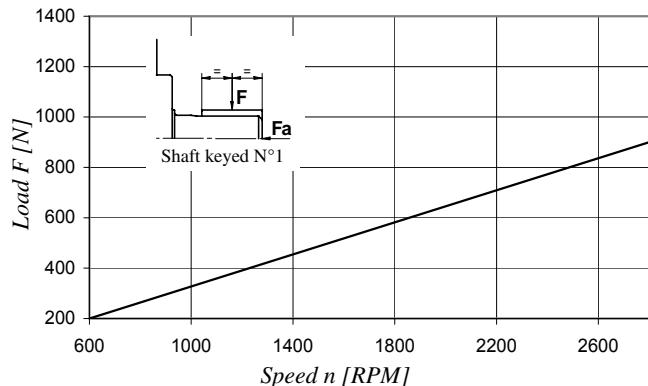

Maximum permissible axial load $F_a = 800 \text{ N}$

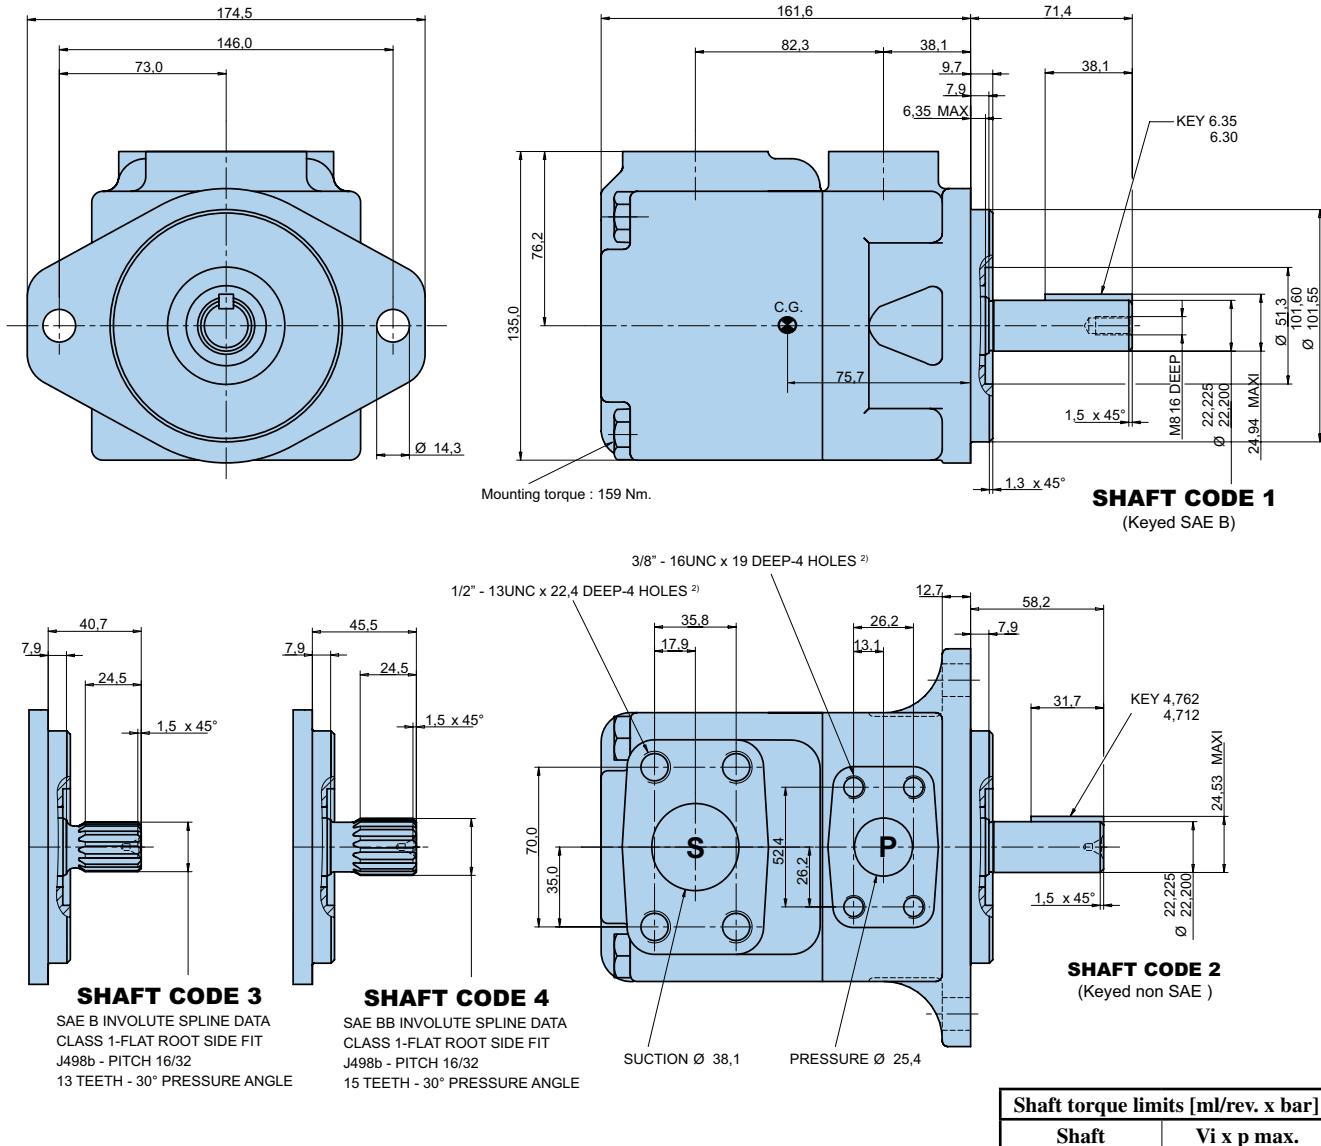

OPERATING CHARACTERISTICS - TYPICAL [24 cSt]

Pressure port	Series	Vi Volumetric displacement	Flow q_{V_e} [l/min] & n = 1500 RPM			Input power P [kW] & n = 1500 RPM		
			p = 0 bar	p = 140 bar	p = 240 bar	p = 7 bar	p = 140 bar	p = 240 bar
T6C	003	10,8 ml/rev	16,2	11,2	7,7	1,3	5,3	8,4
	005	17,2 ml/rev	25,8	20,8	17,3	1,4	7,5	12,2
	006	21,3 ml/rev	31,9	26,9	23,4	1,5	8,9	14,7
	008	26,4 ml/rev	39,6	34,6	31,1	1,6	10,7	17,7
	010	34,1 ml/rev	51,1	46,1	42,6	1,7	13,4	22,3
	012	37,1 ml/rev	55,6	50,6	47,1	1,7	14,4	24,1
	014	46,0 ml/rev	69,0	64,0	60,5	1,9	17,6	29,5
	017	58,3 ml/rev	87,4	82,4	78,9	2,1	21,9	36,9
	020	63,8 ml/rev	95,7	90,7	87,2	2,2	23,8	40,2
	022	70,3 ml/rev	105,4	100,4	96,9	2,3	26,1	44,1
	025	79,3 ml/rev	118,9	113,9	110,4	2,5	29,2	49,5
	028	88,8 ml/rev	133,2	128,2	125,8 ¹⁾	2,8	32,7	48,5 ¹⁾
	031	100,0 ml/rev	150,0	145,0	142,6 ¹⁾	2,8	36,5	54,4 ¹⁾

¹⁾ 028 - 031 = 210 bar max. int.²⁾ Port connection can be supplied with metric threads (Please contact Parker).

Model No.

T7D* or T7DS - B42 - 1 R 00 - A 1 - M0 - ..

T7D series - 125 A2 HW

ISO 2 bolts 3019-2 mounting flange

T7DS series - SAE C 2 bolts

J744 mounting flange

* Rear drive option available, please contact Parker

Displacement

Volumetric displacement (ml/rev.)

B14 = 44,0 B31 = 99,2

B17 = 55,0 B35 = 113,4

B20 = 66,0 B38 = 120,6

B22 = 70,3 B42 = 137,5

B24 = 81,1 045 = 145,7

B28 = 90,0 050 = 158,0

Type of shaft T7D - T7DS

5 = keyed (ISO 3019-2 - G32M)


Type of shaft T7DS

1 = keyed (SAE C) Ø 31,7


2 = keyed (non SAE)

3 = splined (SAE C) 14 teeth

4 = splined (non SAE)

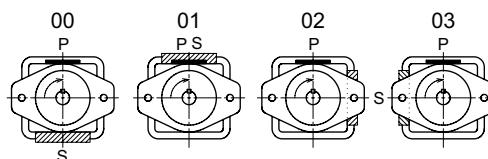

INTERNAL LEAKAGE (TYPICAL)

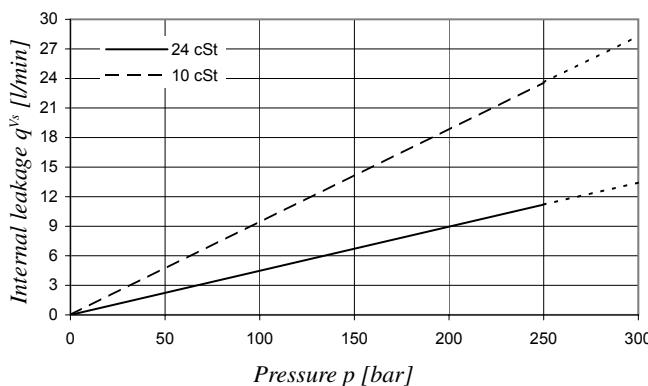

Do not operate pump more than 5 seconds at any speed or viscosity if internal leakage is higher than 50% of theoretical flow.

Modifications

Mounting w/connection variables

4 bolts SAE flange J518

		P = 1.1/4" - S = 2"	
		Metric thread	UNC thread
T7D	M0		
T7DS	M0	Y0 ⁽¹⁾	00

⁽¹⁾ 250 bar max. int.

Seal class

1 = S1 BUNA N - 0,7 bar max. (for mineral oil)

4 = S4 EPDM - 7 bar max. (for fire resistant fluids)

5 = S5 VITON® - 7 bar max. (for mineral oil and fire resistant fluids)

Design letter

Porting combination

00 = standard

Direction of rotation (shaft end view)


R = Clockwise

L = Counter-clockwise


P = Pressure port

S = Suction port


NOISE LEVEL (TYPICAL) - T7D - B31

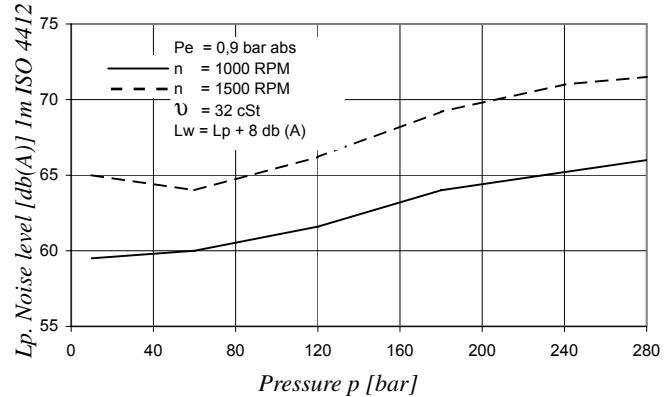


POWER LOSS HYDROMECHANICAL (TYPICAL)

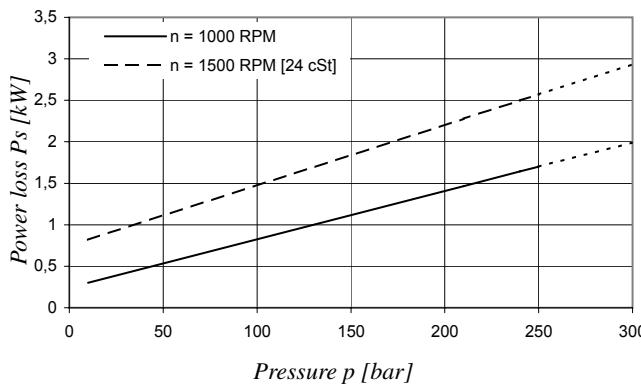

PERMISSIBLE RADIAL LOAD

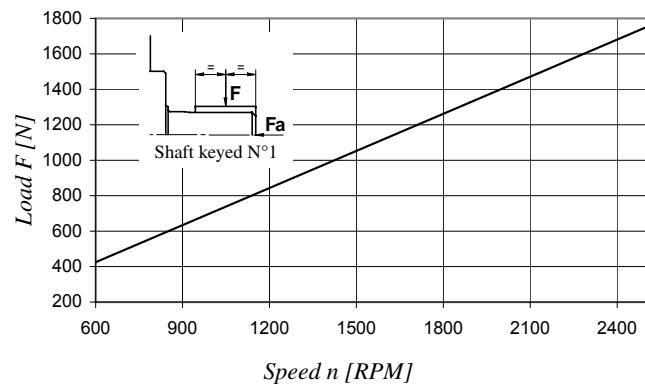

Maximum permissible axial load Fa = 1200 N

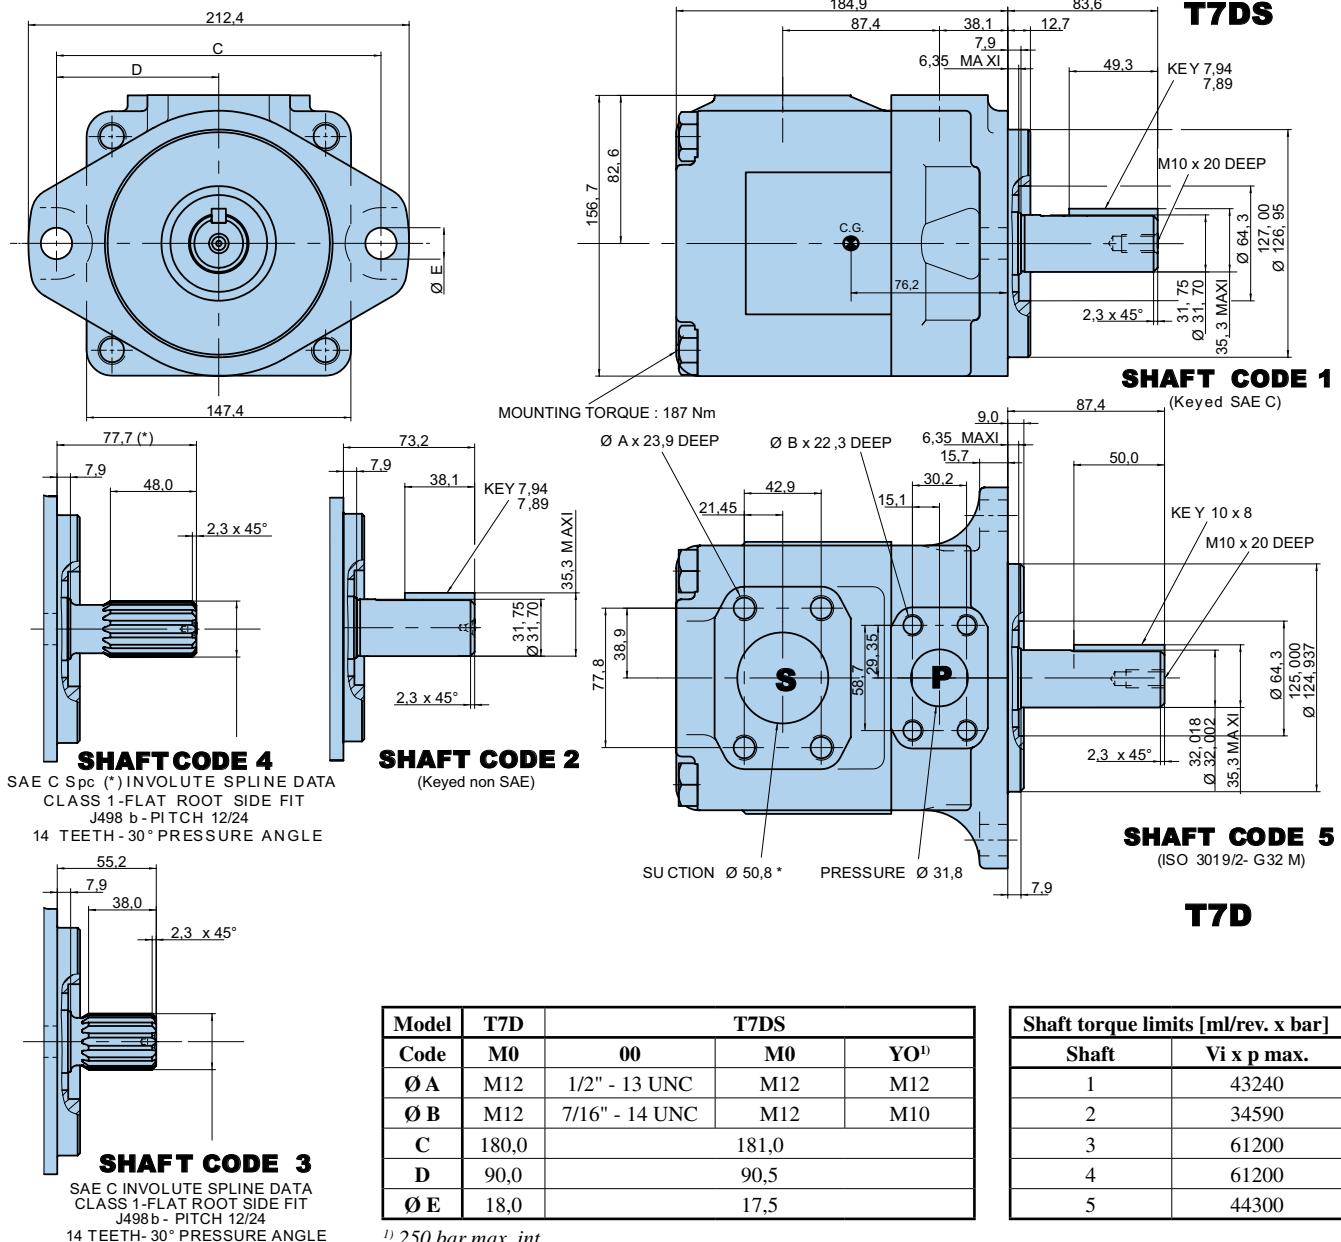

OPERATING CHARACTERISTICS - TYPICAL [24 cSt]

Pressure port	Series	Vi Volumetric displacement	Flow q_{V_e} [l/min] & n = 1500 RPM			Input power P [kW] & n = 1500 RPM		
			p = 0 bar	p = 140 bar	p = 300 bar	p = 7 bar	p = 140 bar	p = 300 bar
T7D T7DS	B14	44,0 ml/rev	66,0	59,4	51,9	1,5	16,6	34,2
	B17	55,0 ml/rev	82,5	75,9	68,4	1,7	20,4	42,4
	B20	66,0 ml/rev	99,0	92,4	84,9	1,9	24,3	50,7
	B22	70,3 ml/rev	105,5	98,8	91,3	2,0	25,8	53,9
	B24	81,1 ml/rev	121,7	115,0	107,5	2,2	29,5	62,0
	B28	90,0 ml/rev	135,0	128,4	120,9	2,3	32,7	68,7
	B31	99,2 ml/rev	148,8	142,2	134,7	2,5	35,9	75,6
	B35	113,4 ml/rev	170,1	163,5	156,9 ¹⁾	2,7	40,8	80,5 ¹⁾
	B38	120,6 ml/rev	180,9	174,3	167,7 ¹⁾	2,9	43,4	85,6 ¹⁾
	B42	137,5 ml/rev	206,3	199,6	194,0 ²⁾	3,2	49,3	90,5 ²⁾
045	045	145,7 ml/rev	218,6	209,2	202,6 ³⁾	4,1	52,8	89,5 ³⁾
	050	158,0 ml/rev	237,0	227,7	223,0 ⁴⁾	4,4	57,1	85,0 ⁴⁾

¹⁾ B35 - B38 = 280 bar max. int. ²⁾ B42 = 260 bar max. int. ³⁾ 04

it. 4) $050 = 210$ bar max. int.

* special 2.1/2" (\emptyset 63,5) suction also available - Please contact Parker.

Model No.**T7E* or T7ES - 072 - 1 R 00 - A 1 - M0 - ..****T7E series - 125 A2 HW**

ISO 2 bolts 3019-2 mounting flange

T7ES series - SAE C 2 bolts

J744 mounting flange

* Rear drive option available, please contact Parker.

Displacement

Volumetric displacement (ml/rev.)

042 = 132,3 057 = 183,3

045 = 142,4 062 = 196,7

050 = 158,5 066 = 213,3

052 = 164,8 072 = 227,1

054 = 171,0 085 = 268,7

Type of shaft T7E - T7ES

5 = keyed (ISO R775 - G38M)



Type of shaft T7ES

1 = keyed (SAE CC)

2 = keyed (non SAE)

3 = splined (SAE C) 14 teeth

4 = splined (SAE CC) 17 teeth

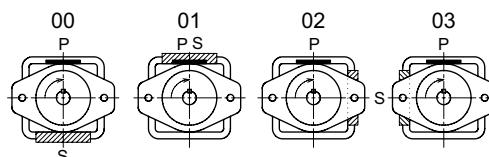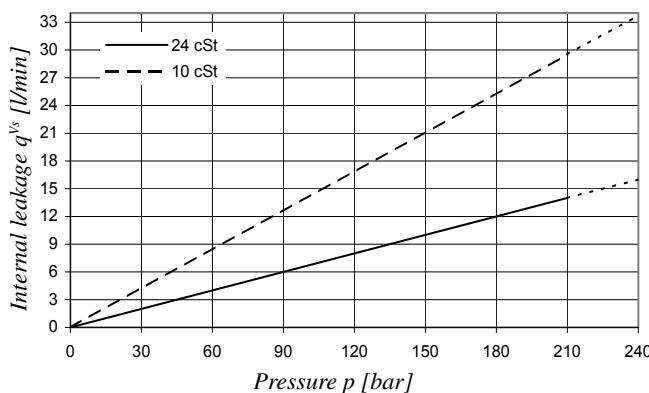**INTERNAL LEAKAGE (TYPICAL)**

Do not operate pump more than 5 seconds at any speed or viscosity if internal leakage is higher than 50% of theoretical flow.

Modifications**Mounting w/connection variables**

4 bolts SAE flange J518

	T7E - T7ES Metric thread	T7ES UNC thread
P	M0	00
S		1 1/2"

Seal class

1 = S1 BUNA N - 0,7 bar max. (for mineral oil)

4 = S4 EPDM - 7 bar max. (for fire resistant fluids)

5 = S5 VITON® - 7 bar max. (for mineral oil and fire resistant fluids)

Design letter**Porting combination**

00 = standard




Direction of rotation (shaft end view)

R = Clockwise


L = Counter-clockwise

P = Pressure port

S = Suction port

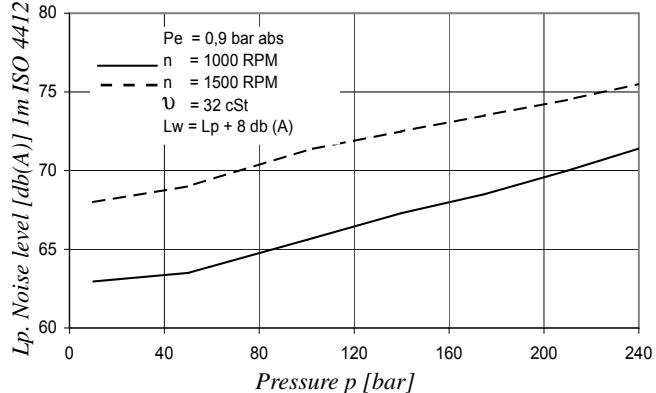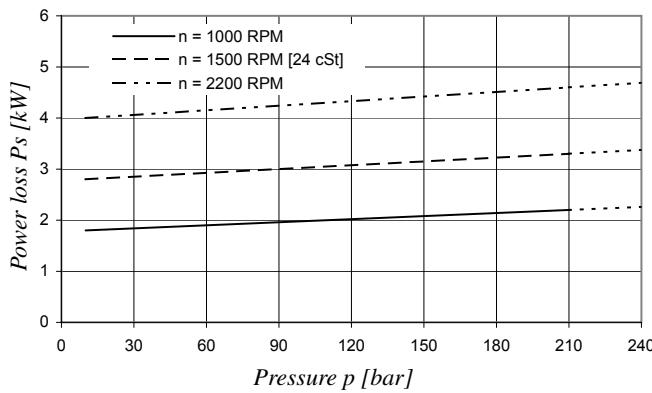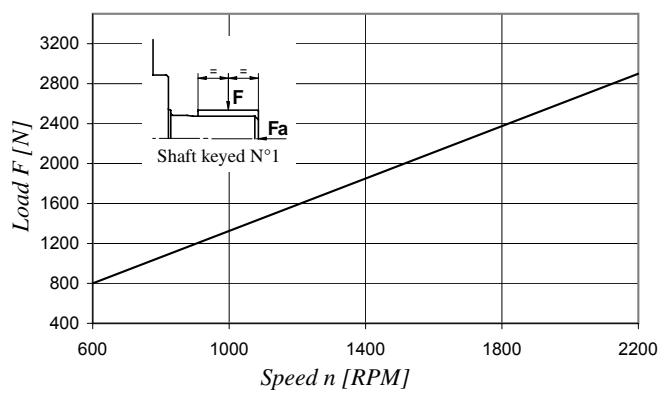NOISE LEVEL (TYPICAL) - T7ES - 050**POWER LOSS HYDROMECHANICAL (TYPICAL)****PERMISSIBLE RADIAL LOAD**

Maximum permissible axial load Fa = 2000 N

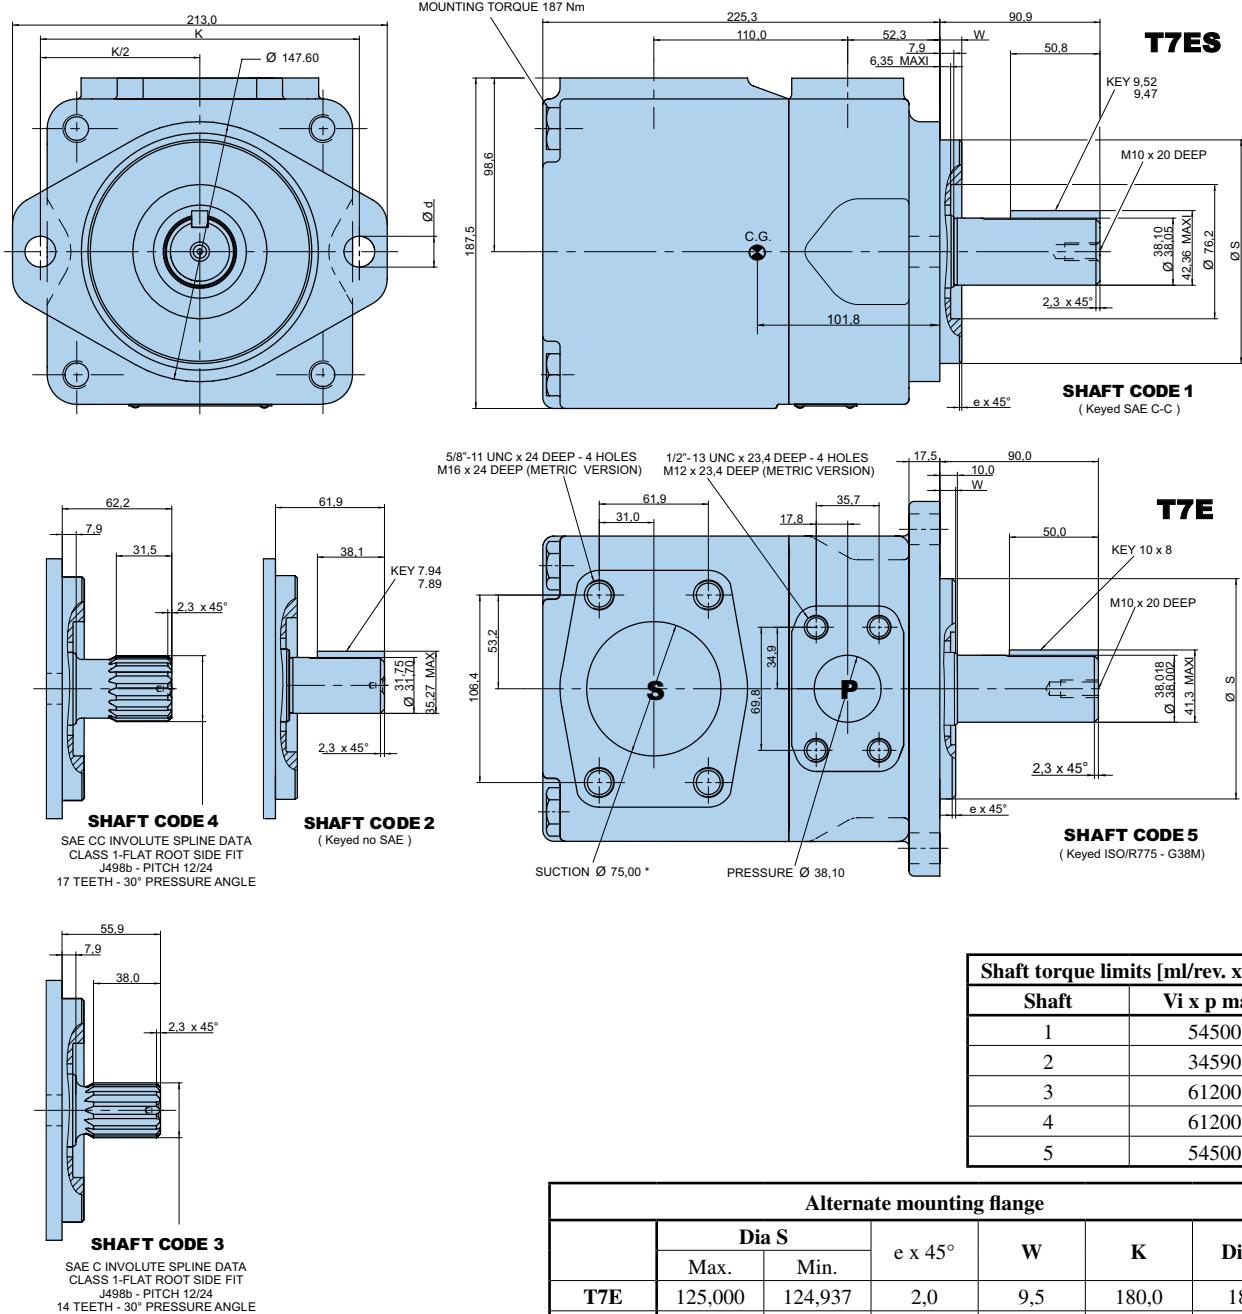

OPERATING CHARACTERISTICS - TYPICAL [24 cSt]

Pressure port	Series	Vi Volumetric displacement	Flow q_v [l/min] & n = 1500 RPM			Input power P [kW] & n = 1500 RPM		
			p = 0 bar	p = 140 bar	p = 240 bar	p = 7 bar	p = 140 bar	p = 240 bar
T7E T7ES	042	132,3 ml/rev	198,5	188,5	181,3	5,2	49,4	82,6
	045	142,4 ml/rev	213,6	203,6	196,5	5,4	52,9	88,7
	050	158,5 ml/rev	237,7	227,7	220,6	5,7	58,5	98,3
	052	164,8 ml/rev	247,2	237,2	230,1	5,8	60,8	102,1
	054	171,0 ml/rev	256,5	246,5	239,4	5,9	63,0	105,8
	057	183,3 ml/rev	275,0	265,0	257,9	6,1	67,3	113,2
	062	196,7 ml/rev	295,0	285,0	277,9	6,4	71,9	121,3
	066	213,3 ml/rev	319,9	309,0	302,8	6,7	77,7	131,2
	072	227,1 ml/rev	340,6	330,6	323,5	6,9	82,6	139,5
	085	268,7 ml/rev	403,0	392,0 ¹⁾	-	9,1	65,8 ¹⁾	-

¹⁾ 085 = 90 bar max. int.

* special 3"1/2 (Ø 88,9) suction also available - Please contact Parker.

Model No.

T7BB or T7BBS - B10 - B10 - 1 R 00 - A 1 - M1 - ..

T7BB series - 100 A2 HW _____

ISO 2 bolts 3019-2 mounting flange

P1

P2

T7BBS series - SAE B 2 bolts

J744 mounting flange

Displacement P1 & P2 _____

Volumetric displacement (ml/rev.)

B02 = 5,8 B09 = 28,0

B03 = 9,8 B10 = 31,8

B04 = 12,8 B11 = 35,0

B05 = 15,9 B12 = 41,0

B06 = 19,8 B14 = 45,0

B07 = 22,5 B15 = 50,0

B08 = 24,9

Type of shaft T7BB - T7BBS _____

5 = keyed (ISO R775)

Type of shaft T7BBS

1 = keyed (non SAE)

2 = keyed (SAE BB)

3 = splined (SAE B) 13 teeth

4 = splined (SAE BB) 15 teeth

Modifications

Mounting w/connection variables

4 bolts SAE flange J518

T7BB- T7BBS Metric thread		T7BBS UNC thread	
M0	M1	00	01
P1	1"	3/4"	1"
P2	3/4"		
S	2.1/2"		

Seal class

1 = S1 BUNA N - 0,7 bar max. (for mineral oil)

4 = S4 EPDM - 0,7 bar max. (for fire resistant fluids)

5 = S5 VITON® - 0,7 bar max. (for mineral oil and fire resistant fluids)

Design letter

Porting combination (see page 72)


00 = standard

Direction of rotation (shaft end view)

R = Clockwise

L = Counter-clockwise


INTERNAL LEAKAGE (TYPICAL)

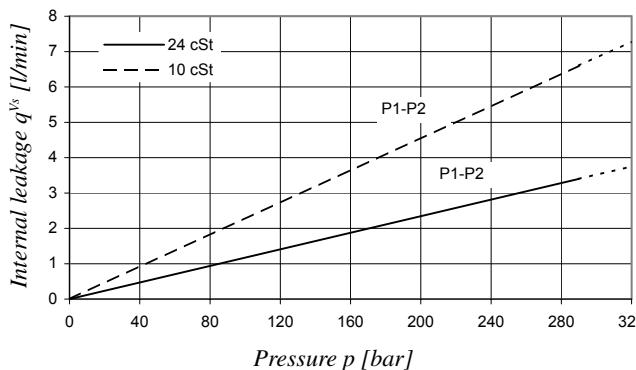

Do not operate pump more than 5 seconds at any speed or viscosity if internal leakage is higher than 50% of theoretical flow.


Total leakage is the sum of each section loss under its respective operating conditions.

POWER LOSS HYDROMECHANICAL (TYPICAL)

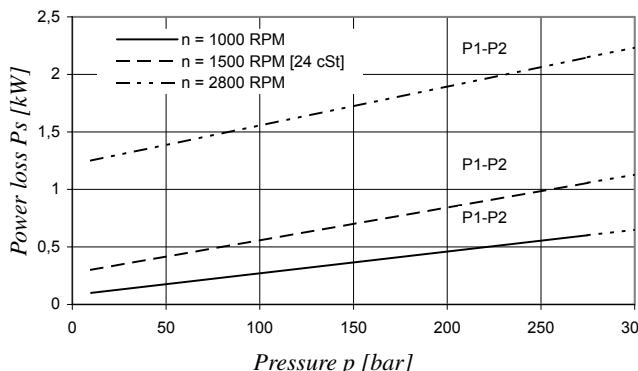


Total hydromechanical power loss is the sum of each section loss under its respective operating conditions.

NOISE LEVEL (TYPICAL) - T7BB - B10 - B04

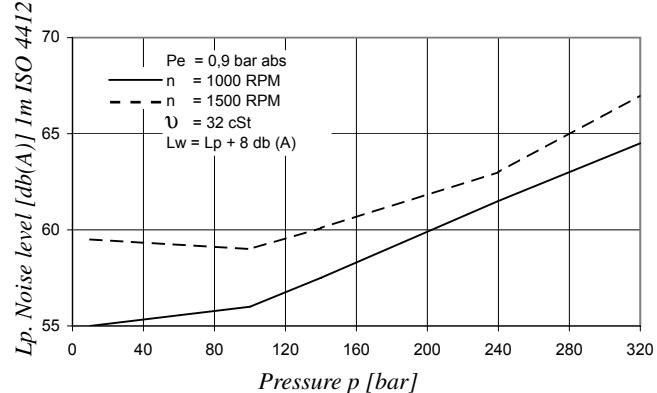


Double pump noise level is given with both stages discharging at the pressure value indicated on the curve.

PERMISSIBLE RADIAL LOAD

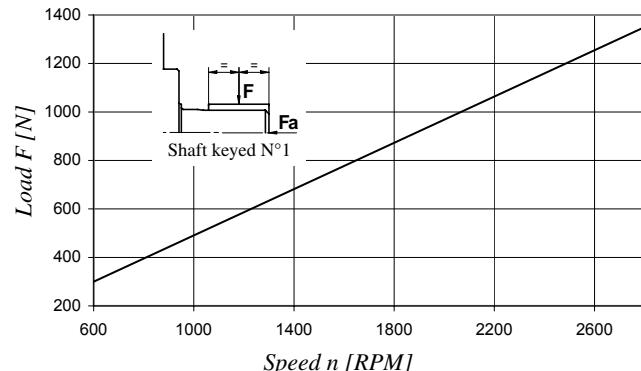

Maximum permissible axial load $F_a = 800 \text{ N}$

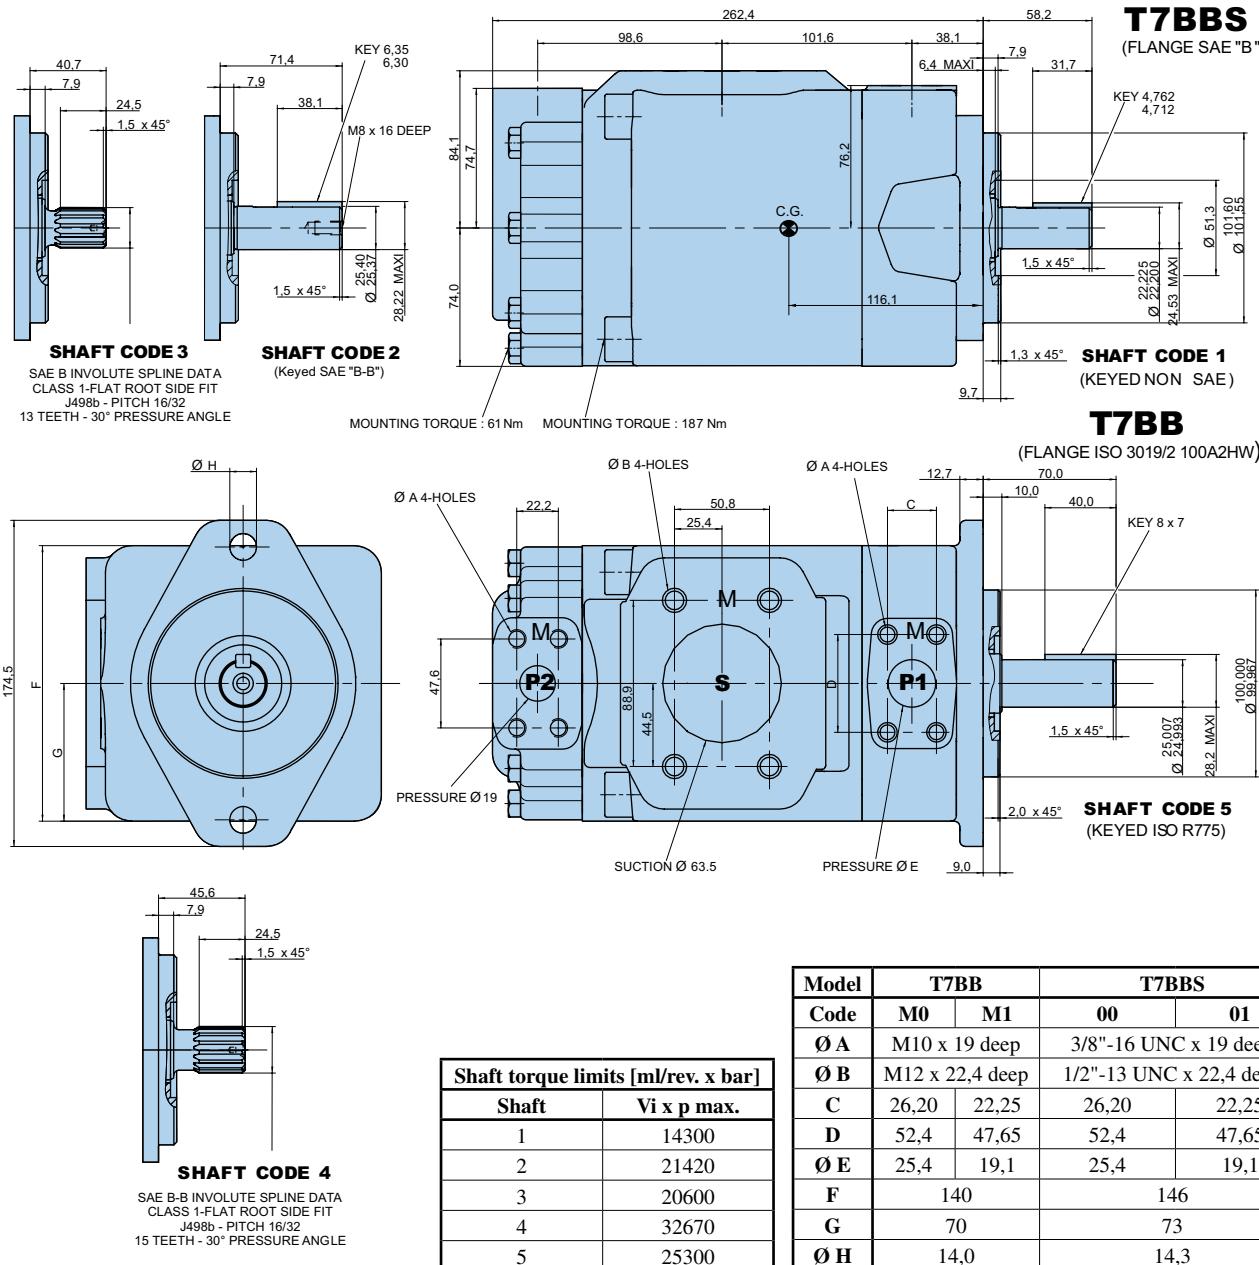

OPERATING CHARACTERISTICS - TYPICAL [24 cSt]

Pressure port	Series	Vi Volumetric displacement	Flow q_{V_e} [l/min] & n = 1500 RPM			Input power P [kW] & n = 1500 RPM		
			p = 0 bar	p = 140 bar	p = 320 bar	p = 7 bar	p = 140 bar	p = 320 bar
P1 & P2	B02	5,8 ml/rev	8,7	7,0	4,8	0,5	2,6	5,4
	B03	9,8 ml/rev	14,7	13,0	10,8	0,6	4,0	8,6
	B04	12,8 ml/rev	19,2	17,5	15,3	0,6	5,0	11,0
	B05	15,9 ml/rev	23,9	22,2	20,0	0,7	6,1	13,5
	B06	19,8 ml/rev	29,7	28,0	25,8	0,7	7,5	16,6
	B07	22,5 ml/rev	33,7	32,0	29,9	0,8	8,5	18,8
	B08	24,9 ml/rev	37,4	35,7	33,5	0,8	9,3	20,7
	B09	28,0 ml/rev	42,0	40,3	38,1	0,9	10,4	23,2
	B10	31,8 ml/rev	47,7	46,0	43,8	0,9	11,7	26,2
	B11	35,0 ml/rev	52,5	50,8	48,9 ¹⁾	1,0	12,8	27,0 ¹⁾
	B12	41,0 ml/rev	61,5	59,8	57,9 ¹⁾	1,1	14,9	31,5 ¹⁾
	B14	45,0 ml/rev	67,5	65,8	63,9 ¹⁾	1,2	16,3	34,5 ¹⁾
	B15	50,0 ml/rev	75,0	73,3	71,6 ²⁾	1,3	18,1	35,7 ²⁾

1) B11 - B12 - B14 = 300 bar max. int.

2) B15 = 280 bar max. int.

Model No.

T6CC W - 022 - 008 - 1 R 00 - C 1 00 - ..

Series - SAE B 2 bolts
J744 mounting flange

Severe duty shaft option

Displacement P1 and P2

Volumetric displacement (ml/rev.)

003 = 10,8	017 = 58,3
005 = 17,2	020 = 63,8
006 = 21,3	022 = 70,3
008 = 26,4	025 = 79,3
010 = 34,1	028 = 88,8
012 = 37,1	031 = 100,0
014 = 46,0	

Type of shaft Severe duty shaft (T6CCW only)


- 1 = keyed (non SAE)
- 2 = keyed (SAE BB)
- 3 = splined (SAE BB) 15 teeth
- 5 = splined (SAE B) 13 teeth

Direction of rotation (shaft end view)

R = Clockwise


L = Counter-clockwise

INTERNAL LEAKAGE (TYPICAL)

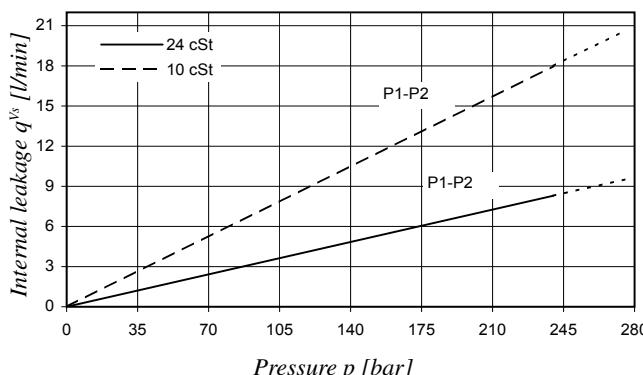

Do not operate pump more than 5 seconds at any speed or viscosity if internal leakage is higher than 50% of theoretical flow.
Total leakage is the sum of each section loss under its respective operating conditions.

POWER LOSS HYDROMECHANICAL (TYPICAL)

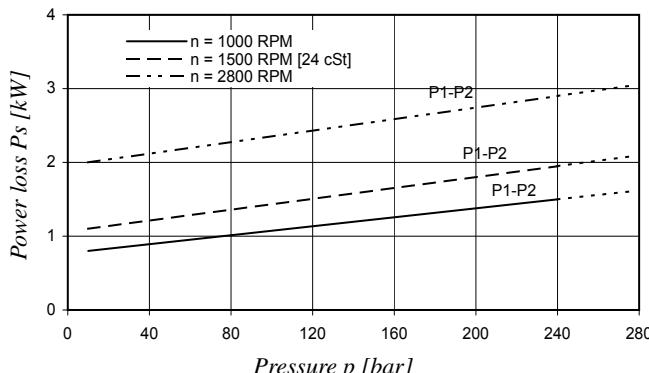

Total hydromechanical power loss is the sum of each section loss under its respective operating conditions.

Modifications

Mounting w/connection variables

	P1 = 1" - S = 3"			
	UNC thread	Metric thread	00	01
P2	1"	3/4" ⁽¹⁾	1"	3/4

	P1 = 1" - S = 2.1/2"⁽²⁾			
	UNC thread	Metric thread	10	11
P2	1"	3/4" ⁽¹⁾	1"	3/4

⁽¹⁾ up to 46 ml/rev. max.

⁽²⁾ up to 126 ml/rev. max.

Always select the largest cartridge in the front place.

Seal class

1 = S1 BUNA N - 0,7 bar max. (for mineral oil)

4 = S4 EPDM - 7 bar max. (for fire resistant fluids)


5 = S5 VITON® - 7 bar max. (for mineral oil and fire resistant fluids)

Design letter

Porting combination (see page 72)


00 = standard

NOISE LEVEL (TYPICAL) - T6CC - 022 - 022

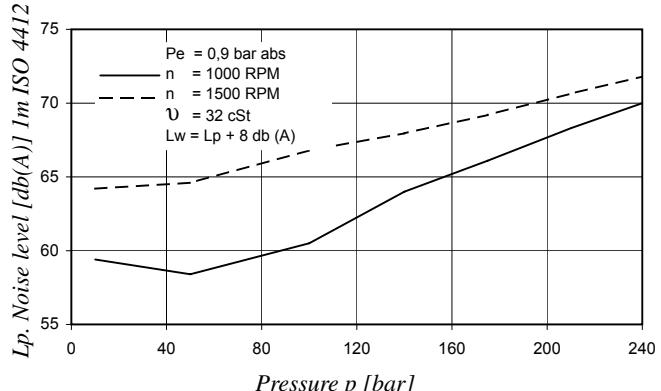


Double pump noise level is given with both stages discharging at the pressure value indicated on the curve.

PERMISSIBLE RADIAL LOAD

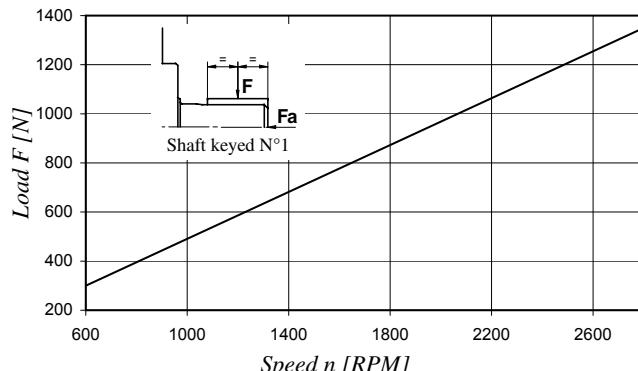

Maximum permissible axial load $F_a = 800 \text{ N}$

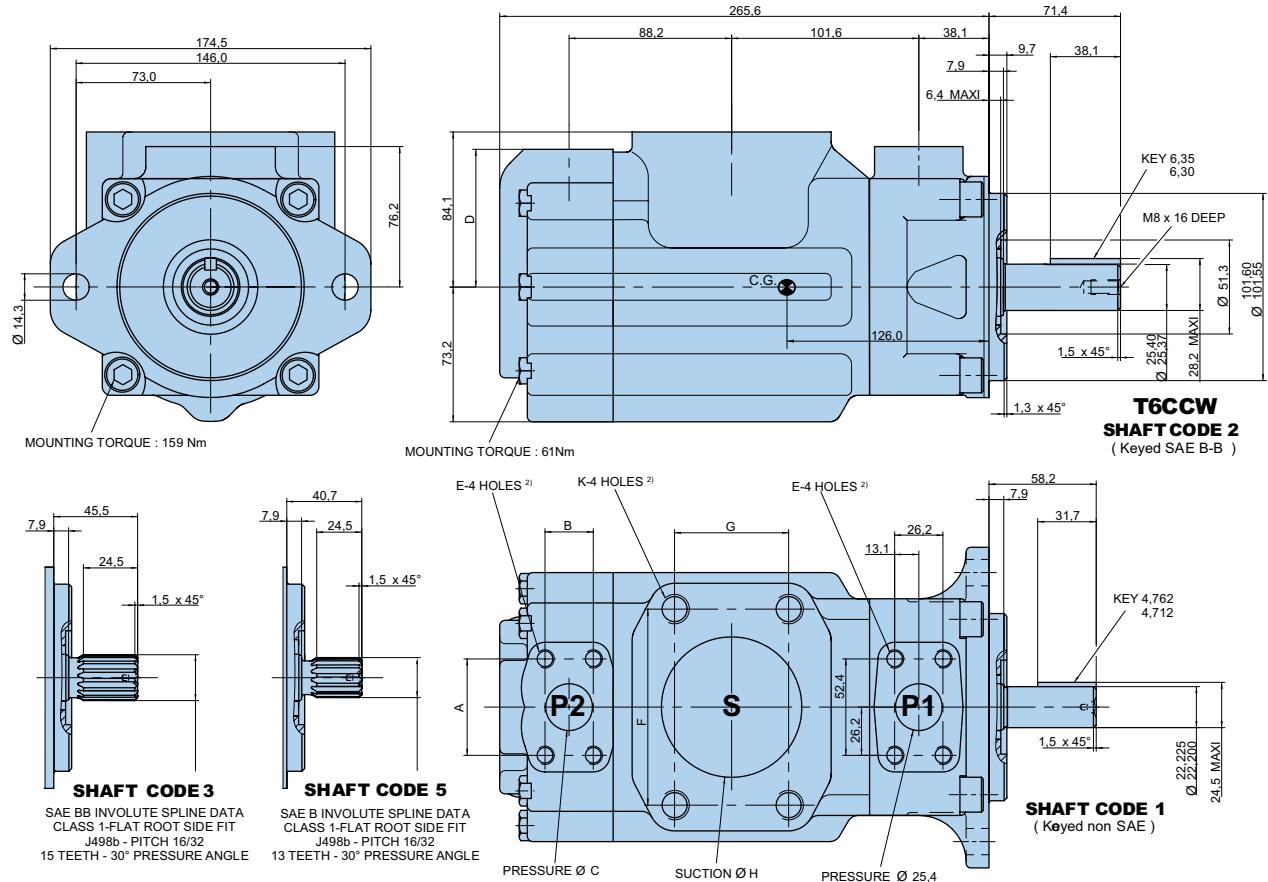

Alternate ports

Code	S = 3"				S = 2.1/2"2)					
	00	01 ¹⁾	0M	W0 ¹⁾	10	11 ¹⁾	1M	W1 ¹⁾		
A	52,4	47,7	52,4	47,7	52,4	47,7	52,4	47,7		
B	26,2	22,4	26,2	22,4	26,2	22,4	26,2	22,4		
Ø C	25,4	19,0	25,4	19,0	25,4	19,0	25,4	19,0		
D	74,7	76,2	74,7	76,2	74,7	76,2	74,7	76,2		
E	3/8"-16 UNC x 19 deep	M10 x 19 deep		3/8"-16 UNC x 19 deep	M10 x 19 deep					
F	106,4				88,9					
G	61,9				50,9					
Ø H	76,2				63,5					
K	5/8"-11UNC x 28,4 deep	M16 x 28,4 deep		1/2"-13 UNC x 23,9 deep	M12 x 23,9 deep					

¹⁾ Max. cam 014 ²⁾ P1 + P2 = 126 ml/rev. max.

OPERATING CHARACTERISTICS - TYPICAL [24 cSt]

Pressure port	Series	Vi Volumetric displacement	Flow q _{ve} [l/min] & n = 1500 RPM			Input power P [kW] & n = 1500 RPM		
			p = 0 bar	p = 140 bar	p = 240 bar	p = 7 bar	p = 140 bar	p = 240 bar
P1 & P2	003	10,8 ml/rev	16,2	11,2	7,7	1,3	5,3	8,4
	005	17,2 ml/rev	25,8	20,8	17,3	1,4	7,5	12,2
	006	21,3 ml/rev	31,9	26,9	23,4	1,5	8,9	14,7
	008	26,4 ml/rev	39,6	34,6	31,1	1,6	10,7	17,7
	010	34,1 ml/rev	51,1	46,1	42,6	1,7	13,4	22,3
	012	37,1 ml/rev	55,6	50,6	47,1	1,7	14,4	24,1
	014	46,0 ml/rev	69,0	64,0	60,5	1,9	17,6	29,5
	017	58,3 ml/rev	87,4	82,4	78,9	2,1	21,9	36,9
	020	63,8 ml/rev	95,7	90,7	87,2	2,2	23,8	40,2
	022	70,3 ml/rev	105,4	100,4	96,9	2,3	26,1	44,1
	025	79,3 ml/rev	118,9	113,9	110,4	2,5	29,2	49,5
	028	88,8 ml/rev	133,2	128,2	125,8 ¹⁾	2,8	32,7	48,5 ¹⁾
	031	100,0 ml/rev	150,0	145,0	142,6 ¹⁾	2,8	36,5	54,4 ¹⁾

¹⁾ 028 - 031 = 210 bar max. int. 2) Port connection can be supplied with metric threads, please contact Parker.

Model No.

T67CB W - 010 - B10 - 1 R 00 - A 1 M1 - ..

Series - SAE B 2 bolts

J744 mounting flange

Severe duty shaft

P1

P2

Modifications

Mounting w/connection variables

11 = 4 bolts SAE flange

(J518) UNC thread

M1 = 4 bolts SAE flange

(J518) Metric thread

Seal class

1 = S1 BUNA N - 0,7 bar max. (for mineral oil)

4 = S4 EPDM - 7 bar max. (for fire resistant fluids)

5 = S5 VITON® - 7 bar max. (for mineral oil and fire resistant fluids)

Design letter

Porting combination(see page 72)

00 = standard

Direction of rotation (shaft end view)

R = Clockwise

L = Counter-clockwise

Displacement P1

Volumetric displacement (ml/rev.)

003 = 10,8	017 = 58,3
005 = 17,2	020 = 63,8
006 = 21,3	022 = 70,3
008 = 26,4	025 = 79,3
010 = 34,1	028 = 88,8
012 = 37,1	031 = 100,0
014 = 46,0	

Displacement P2

Volumetric displacement (ml/rev.)

B02 = 5,8	B09 = 28,0
B03 = 9,8	B10 = 31,8
B04 = 12,8	B11 = 35,0
B05 = 15,9	B12 = 41,0
B06 = 19,8	B14 = 45,0
B07 = 22,5	B15 = 50,0
B08 = 24,9	


Type of shaft Severe duty shaft (T67CW only)

1 = keyed (non SAE) 2 = keyed (SAE BB)

3 = splined (SAE BB) 15 teeth

5 = splined (SAE B) 13 teeth


INTERNAL LEAKAGE (TYPICAL)

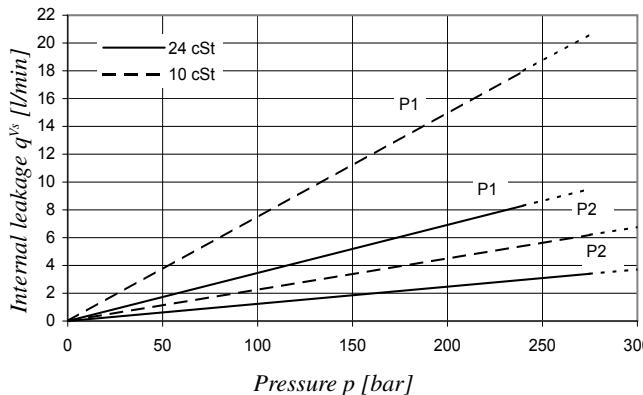

Do not operate pump more than 5 seconds at any speed or viscosity if internal leakage is higher than 50% of theoretical flow.


Total leakage is the sum of each section loss under its respective operating conditions.

POWER LOSS HYDROMECHANICAL (TYPICAL)

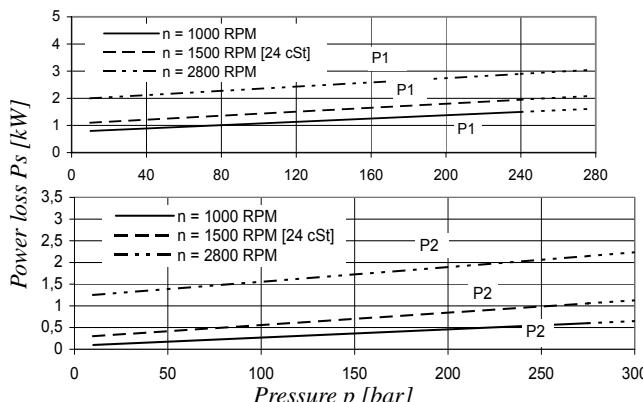


Total hydromechanical power loss is the sum of each section loss under its respective operating conditions.

NOISE LEVEL (TYPICAL) - T67CB - 014 - B03

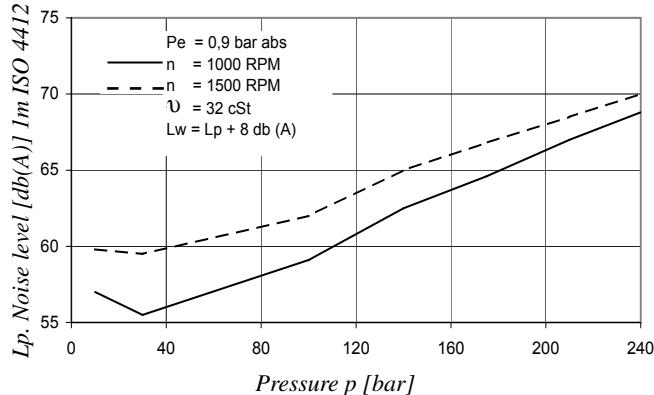


Double pump noise level is given with both stages discharging at the pressure value indicated on the curve.

PERMISSIBLE RADIAL LOAD

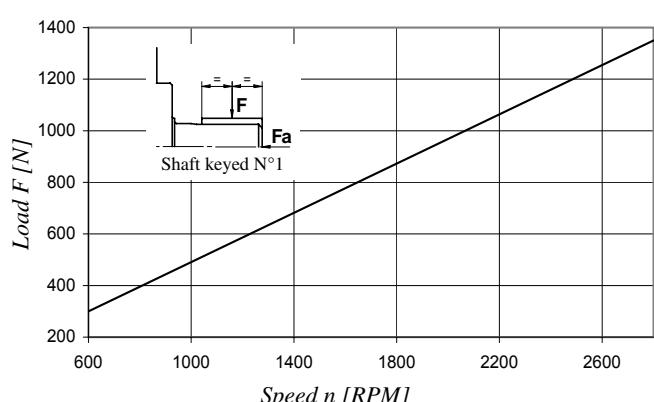

Maximum permissible axial load $F_a = 800$ N

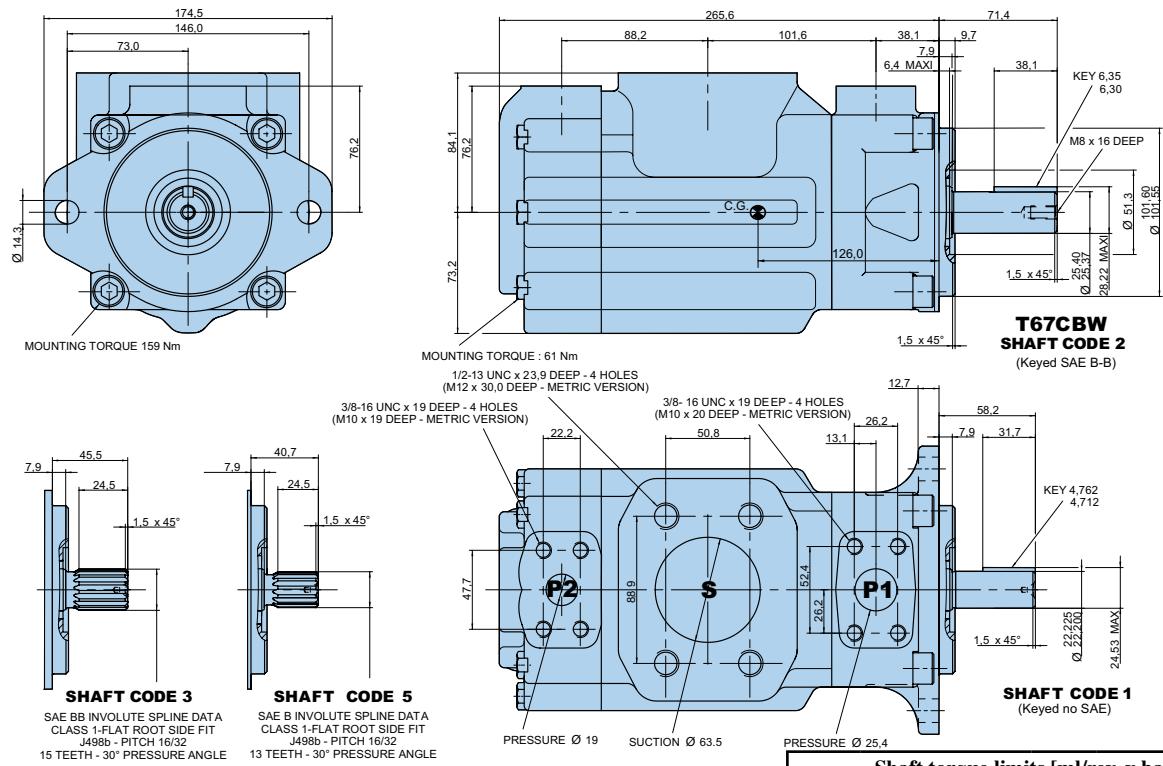

Shaft torque limits [ml/rev. x bar]			
Shaft	Vi x p max.	Shaft	Vi x p max.
1	14300	3	32670
2	21420	5	20600

OPERATING CHARACTERISTICS - TYPICAL [24 cSt]

Pressure port	Series	Vi Volumetric displacement	Flow q_{V_0} [l/min] & n = 1500 RPM			Input power P [kW] & n = 1500 RPM		
			p = 0 bar	p = 140 bar	p = 275 bar	p = 7 bar	p = 140 bar	p = 275 bar
P1	003	10,8 ml/rev	16,2	11,2	*	1,3	5,3	*
	005	17,2 ml/rev	25,8	20,8	16,1	1,4	7,5	13,9
	006	21,3 ml/rev	31,9	26,9	22,2	1,5	8,9	16,8
	008	26,4 ml/rev	39,6	34,6	29,9	1,6	10,7	20,3
	010	34,1 ml/rev	51,1	46,1	41,4	1,7	13,4	25,6
	012	37,1 ml/rev	55,6	50,6	45,9	1,7	14,4	27,6
	014	46,0 ml/rev	69,0	64,0	59,3	1,9	17,6	33,7
	017	58,3 ml/rev	87,4	82,4	77,7	2,1	21,9	42,2
	020	63,8 ml/rev	95,7	90,7	86,0	2,2	23,8	46,0
	022	70,3 ml/rev	105,4	100,4	95,7	2,3	26,1	50,4
	025	79,3 ml/rev	118,9	113,9	109,2	2,5	29,2	56,6
	028	88,8 ml/rev	133,2	128,2	125,8 ¹⁾	2,8	32,7	48,5 ¹⁾
	031	100,0 ml/rev	150,0	145,0	142,6 ¹⁾	2,8	36,5	54,4 ¹⁾
			p = 0 bar	p = 140 bar	p = 300 bar	p = 7 bar	p = 140 bar	p = 300 bar
P2	B02	5,8 ml/rev	8,7	7,0	5,1	0,5	2,6	5,1
	B03	9,8 ml/rev	14,7	13,0	11,1	0,6	4,0	8,1
	B04	12,8 ml/rev	19,2	17,5	15,6	0,6	5,0	10,4
	B05	15,9 ml/rev	23,9	22,2	20,2	0,7	6,1	12,7
	B06	19,8 ml/rev	29,7	28,0	26,1	0,7	7,5	15,6
	B07	22,5 ml/rev	33,7	32,0	30,2	0,8	8,5	17,6
	B08	24,9 ml/rev	37,4	35,7	33,7	0,8	9,3	19,5
	B09	28,0 ml/rev	42,0	40,3	38,4	0,9	10,4	21,8
	B10	31,8 ml/rev	47,7	46,0	44,1	0,9	11,7	26,2
	B11	35,0 ml/rev	52,5	50,8	48,9	1,0	12,8	27,0
	B12	41,0 ml/rev	61,5	59,8	57,9	1,1	14,9	31,5
	B14	45,0 ml/rev	67,5	65,8	63,9	1,2	16,3	34,5
	B15	50,0 ml/rev	75,0	73,3	71,6 ²⁾	1,3	18,1	35,7 ²⁾

* We do not recommend to use the size 003 in P1 at 275 bar & 1500 RPM as the internal is over 50% of theoretical flow.

¹⁾ 028 - 031 = 210 bar max. int. ²⁾ B15 = 280 bar max.int.

Model No.**T7DB or T7DBS - B42 - B10 - 1 R 00 - A 1 M1 - ..**

T7DB series - 125 A2 HW

ISO 2 bolts 3019-2 mounting flange

T7DBS series - SAE C 2 bolts

J744 mounting flange

P1

P2

Modifications**Mounting w/connection variables**

4 bolts SAE flanges J518

	Metric thread T7DB - T7DBS		UNC thread T7DBS	
	M0	M1	00	01
P1	1.1/4"	1.1/4"	1.1/4"	1.1/4"
P2	1"	3/4"	1"	3/4"
S	3"	3"	3"	3"

Seal class

1 = S1 BUNA N - 0,7 bar max. (for mineral oil)

4 = S4 EPDM - 7 bar max. (for fire resistant fluids)

5 = S5 VITON® - 7 bar max. (for mineral oil and fire
resistant fluids)**Design letter****Porting combination (see page 72)**

00 = standard

Direction of rotation (shaft end view)

R = Clockwise

L = Counter-clockwise

Displacement P1

Volumetric displacement (ml/rev.)

B14 = 44,0	B31 = 99,2
B17 = 55,0	B35 = 113,4
B20 = 66,0	B38 = 120,6
B22 = 70,3	B42 = 137,5
B24 = 81,1	B45 = 145,7
B28 = 90,0	B50 = 158,0

Displacement P2

Volumetric displacement (ml/rev.)


B02 = 5,8	B09 = 28,0
B03 = 9,8	B10 = 31,8
B04 = 12,8	B11 = 35,0
B05 = 15,9	B12 = 41,0
B06 = 19,8	B14 = 45,0
B07 = 22,5	B15 = 50,0
B08 = 24,9	

Type of shaft T7DBS

1 = keyed (SAE C)	3 = splined (SAE C) 14 teeth
2 = keyed (non SAE)	4 = splined (spec. SAE C)


Type of shaft T7DB - T7DBS

5 = keyed (ISO 3019 -2 - G32 M)

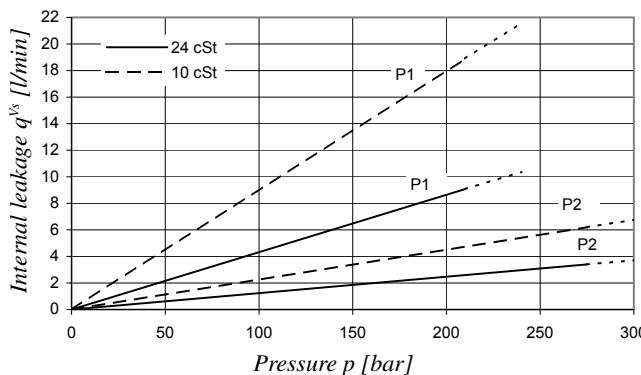
INTERNAL LEAKAGE (TYPICAL)

Do not operate pump more than 5 seconds at any speed or viscosity if internal leakage is higher than 50% of theoretical flow.


Total leakage is the sum of each section loss under its respective operating conditions.

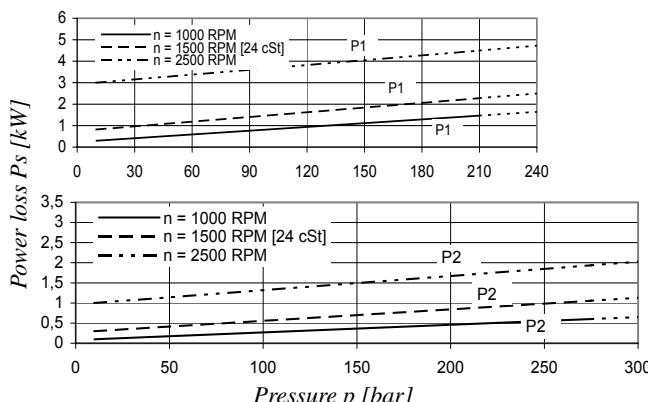POWER LOSS HYDROMECHANICAL (TYPICAL)


Total hydromechanical power loss is the sum of each section loss under its respective operating conditions.

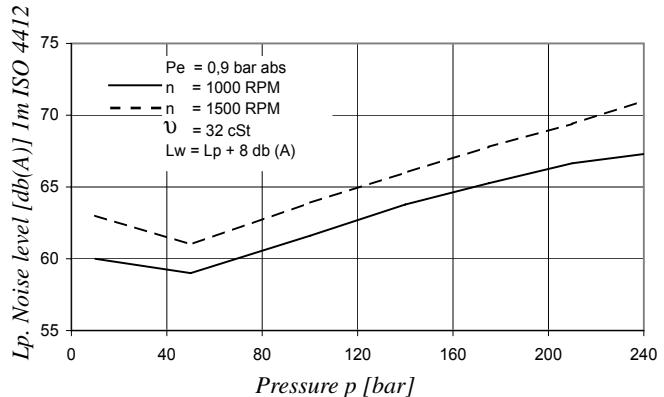NOISE LEVEL (TYPICAL) - T7DBS - B31 - B10

Double pump noise level is given with both stages discharging at the pressure value indicated on the curve.

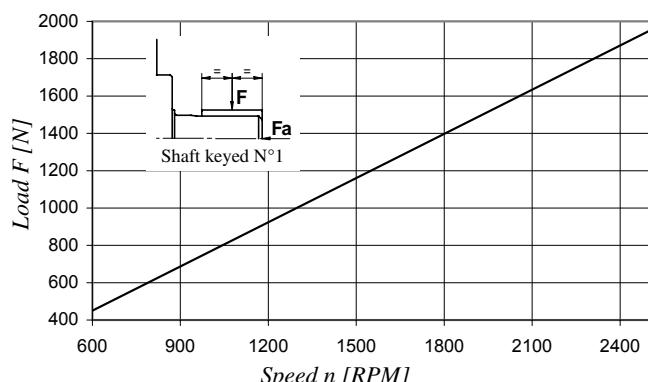PERMISSIBLE RADIAL LOAD

Maximum permissible axial load $F_a = 1200$ N

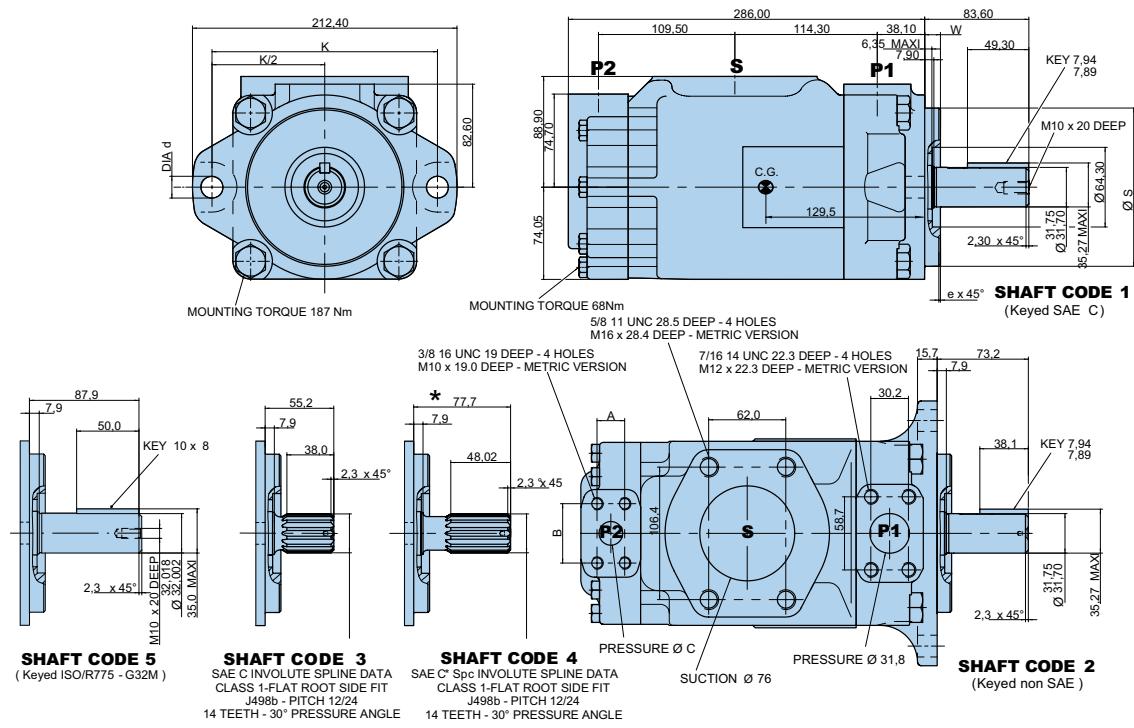

Alternate mounting flange						
	Dia S		e x 45°	W	K	Dia d
	Max.	Min.				
T7DB	125,000	124,937	2,0	9,5	180,0	18,0
T7DBS	127,000	126,950	1,3	12,7	181,0	17,5

Alternate connect. variables		
	00 & M0	01 & M1
A	26,20	22,20
B	52,35	47,6
C	25,00	19,0

Shaft torque limits [ml/rev. x bar]			
Shaft	Vi x p max.	Shaft	Vi x p max.
1	43240	4	61200
2	34590	5	42500
3	61200		

OPERATING CHARACTERISTICS - TYPICAL [24 cSt]

Pressure port	Series	Vi Volumetric displacement	Flow q_{V_e} [l/min] & n = 1500 RPM			Input power P [kW] & n = 1500 RPM		
			p = 0 bar	p = 140 bar	p = 250 bar	p = 7 bar	p = 140 bar	p = 250 bar
P1	B14	44,0 ml/rev	66,0	59,4	54,2	1,5	16,6	29,0
	B17	55,0 ml/rev	82,5	75,9	70,7	1,7	20,4	35,8
	B20	66,0 ml/rev	99,0	92,4	87,2	1,9	24,3	42,7
	B22	70,3 ml/rev	105,5	98,8	93,7	2,0	25,8	45,4
	B24	81,1 ml/rev	121,7	115,0	109,9	2,2	29,5	52,1
	B28	90,0 ml/rev	135,0	128,4	123,2	2,3	32,7	57,7
	B31	99,2 ml/rev	148,8	142,2	137,0	2,5	35,9	63,5
	B35	113,4 ml/rev	170,1	163,5	158,3	2,7	40,8	72,3
	B38	120,6 ml/rev	180,9	174,3	169,1	2,9	43,4	76,8
	B42	137,5 ml/rev	206,3	199,6	194,5	3,2	49,3	87,4
	045	145,7 ml/rev	218,6	209,2	202,6 ¹⁾	4,1	52,8	89,5 ¹⁾
	050	158,0 ml/rev	237,0	227,7	223,0 ²⁾	4,4	57,1	85,0 ²⁾
			p = 0 bar	p = 140 bar	p = 300 bar	p = 7 bar	p = 140 bar	p = 300 bar
P2	B02	5,8 ml/rev	8,7	7,0	5,1	0,5	2,6	5,1
	B03	9,8 ml/rev	14,7	13,0	11,1	0,6	4,0	8,1
	B04	12,8 ml/rev	19,2	17,5	15,6	0,6	5,0	10,4
	B05	15,9 ml/rev	23,9	22,2	20,2	0,7	6,1	12,7
	B06	19,8 ml/rev	29,7	28,0	26,1	0,7	7,5	15,6
	B07	22,5 ml/rev	33,7	32,0	30,2	0,8	8,5	17,6
	B08	24,9 ml/rev	37,4	35,7	33,7	0,8	9,3	19,5
	B09	28,0 ml/rev	42,0	40,3	38,4	0,9	10,4	21,8
	B10	31,8 ml/rev	47,7	46,0	44,1	0,9	11,7	26,2
	B11	35,0 ml/rev	52,5	50,8	48,9	1,0	12,8	27,0
	B12	41,0 ml/rev	61,5	59,8	57,9	1,1	14,9	31,5
	B14	45,0 ml/rev	67,5	65,8	63,9	1,2	16,3	34,5
	B15	50,0 ml/rev	75,0	73,3	71,6 ³⁾	1,3	18,1	35,7 ³⁾

1) 045 = 240 bar max. int.

²⁾ 050 = 210 bar max. int.

³⁾ B15 = 280 bar max. int.

Model No.**T67DC W - B42 - 010 - 1 R 00 - A 1 M1 - ..**

Series - SAE C 2 bolts

J744 mounting flange

Severe duty shaft option

P1

P2

Modifications**Mounting w/connection variables**

4 bolts SAE flanges J518

	Metric thread		UNC thread	
	M0	M1	00	01
P1	1.1/4"	1.1/4"	1.1/4"	1.1/4"
P2	1"	3/4"	1"	3/4"
S	3"	3"	3"	3"

Seal class

1 = S1 BUNA N - 0,7 bar max. (for mineral oil)

4 = S4 EPDM - 7 bar max. (for fire resistant fluids)

5 = S5 VITON® - 7 bar max. (for mineral oil and fire
resistant fluids)**Design letter****Porting combination (see page 72)**

00 = standard

Direction of rotation (shaft end view)

R = Clockwise

L = Counter-clockwise

Displacement P1

Volumetric displacement (ml/rev.)

B14 = 44,0	B31 = 99,2
B17 = 55,0	B35 = 113,4
B20 = 66,0	B38 = 120,6
B22 = 70,3	B42 = 137,5
B24 = 81,1	045 = 145,7
B28 = 90,0	050 = 158,0

Displacement P2

Volumetric displacement (ml/rev.)

003 = 10,8	017 = 58,3
005 = 17,2	020 = 63,8
006 = 21,3	022 = 70,3
008 = 26,4	025 = 79,3
010 = 34,1	028 = 88,8
012 = 37,1	031 = 100,0
014 = 46,0	


Type of shaft

1 = keyed (SAE C) 3 = splined (SAE C) 14 teeth

2 = keyed (non SAE) 4 = splined (spec. SAE C)


Type of shaft - Severe duty (T67DCW only)

5 = keyed (non SAE)

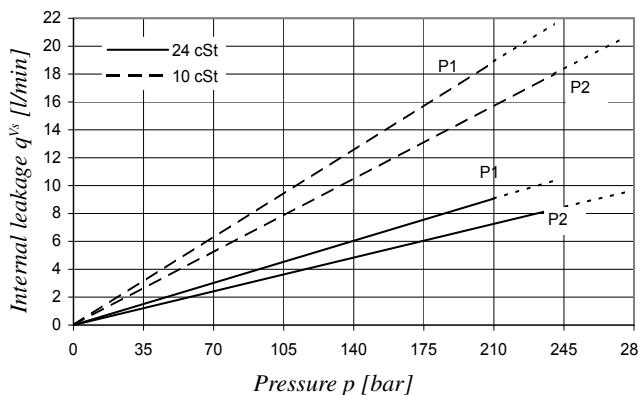
INTERNAL LEAKAGE (TYPICAL)

Do not operate pump more than 5 seconds at any speed or viscosity if internal leakage is higher than 50% of theoretical flow.


Total leakage is the sum of each section loss under its respective operating conditions.

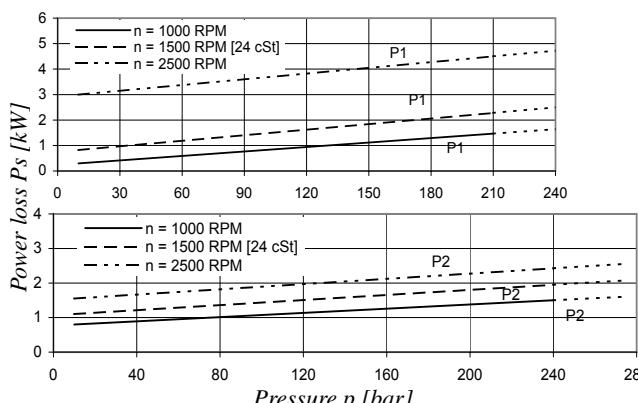POWER LOSS HYDROMECHANICAL (TYPICAL)


Total hydromechanical power loss is the sum of each section loss under its respective operating conditions.

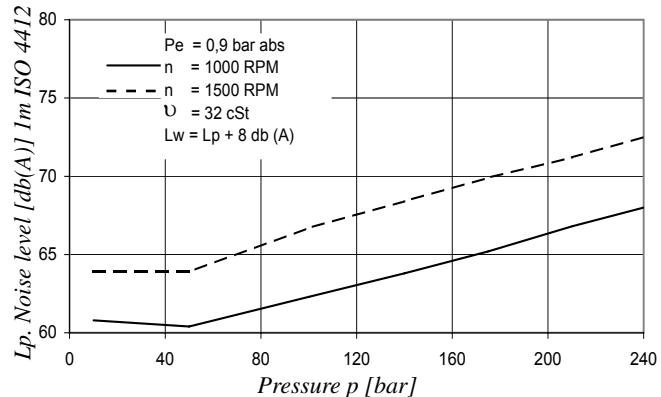NOISE LEVEL (TYPICAL) - T67DC - B31 - 022

Double pump noise level is given with both stages section discharging at the pressure value indicated on the curve.

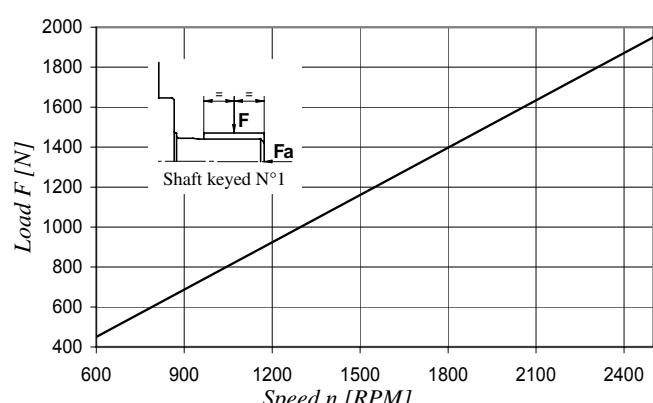PERMISSIBLE RADIAL LOAD

Maximum permissible axial load $F_a = 1200 \text{ N}$

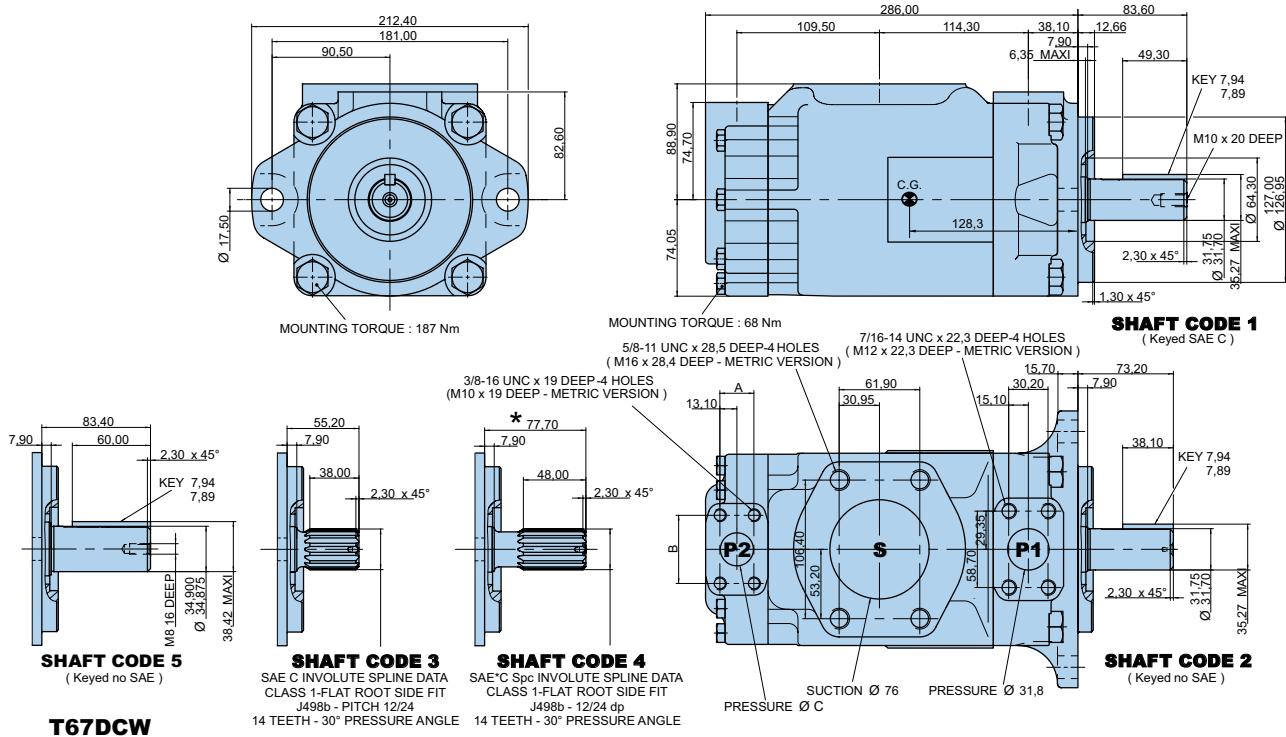**T67DCW**

Alternate connect. variables		
	00 & M0	01 & M1
A	26,20	22,20
B	52,35	47,60
C	25,00	19,00

Shaft torque limits [ml/rev. x bar]			
Shaft	Vi x p max.	Shaft	Vi x p max.
1	43240	4	61200
2	34590	5	55600
3	61200		

OPERATING CHARACTERISTICS - TYPICAL [24 cSt]

Pressure port	Series	Vi Volumetric displacement	Flow q_{V_e} [l/min] & n = 1500 RPM			Input power P [kW] & n = 1500 RPM		
			p = 0 bar	p = 140 bar	p = 250 bar	p = 7 bar	p = 140 bar	p = 250 bar
P1	B14	44,0 ml/rev	66,0	59,4	54,2	1,5	16,6	29,0
	B17	55,0 ml/rev	82,5	75,9	70,7	1,7	20,4	35,8
	B20	66,0 ml/rev	99,0	92,4	87,2	1,9	24,3	42,7
	B22	70,3 ml/rev	105,5	98,8	93,7	2,0	25,8	45,4
	B24	81,1 ml/rev	121,7	115,0	109,9	2,2	29,5	52,1
	B28	90,0 ml/rev	135,0	128,4	123,2	2,3	32,7	57,7
	B31	99,2 ml/rev	148,8	142,2	137,0	2,5	35,9	63,5
	B35	113,4 ml/rev	170,1	163,5	158,3	2,7	40,8	72,3
	B38	120,6 ml/rev	180,9	174,3	169,1	2,9	43,4	76,8
	B42	137,5 ml/rev	206,3	199,6	194,5	3,2	49,3	87,4
P2	045	145,7 ml/rev	218,6	209,2	202,6 ²⁾	4,1	52,8	89,5 ²⁾
	050	158,0 ml/rev	237,0	227,7	223,0 ¹⁾	4,4	57,1	85,0 ¹⁾
			p = 0 bar	p = 140 bar	p = 275 bar	p = 7 bar	p = 140 bar	p = 275 bar
	003	10,8 ml/rev	16,2	11,2	*	1,3	5,3	*
	005	17,2 ml/rev	25,8	20,8	16,1	1,4	7,5	13,9
	006	21,3 ml/rev	31,9	26,9	22,2	1,5	8,9	16,8
	008	26,4 ml/rev	39,6	34,6	29,9	1,6	10,7	20,3
	010	34,1 ml/rev	51,1	46,1	41,4	1,7	13,4	25,6
	012	37,1 ml/rev	55,6	50,6	45,9	1,7	14,4	27,6
	014	46,0 ml/rev	69,0	64,0	59,3	1,9	17,6	33,7
	017	58,3 ml/rev	87,4	82,4	77,7	2,1	21,9	42,2
	020	63,8 ml/rev	95,7	90,7	86,0	2,2	23,8	46,0
	022	70,3 ml/rev	105,4	100,4	95,7	2,3	26,1	50,4
	025	79,3 ml/rev	118,9	113,9	109,2	2,5	29,2	56,6
	028	88,8 ml/rev	133,2	128,2	125,8 ¹⁾	2,8	32,7	48,5 ¹⁾
	031	100,0 ml/rev	150,0	145,0	142,6 ¹⁾	2,8	36,5	54,4 ¹⁾

* We do not recommend to use the size 003 in P2 at 275 bar & 1500 RPM as the internal leakage is over 50% of theoretical flow.

1) 050 - 028 - 031 = 210 bar max. int. 2) 045 = 240 bar max. int.

Model No.

T7DD or T7DDS - B42 - B22 - 1 R 00 - A 1 M0 - ..

T7DD series - ISO 6 bolts 3019-2

Mounting flange 125-A2-HW or 125-B4 HW

T7DDS series - SAE C 6 bolts

J744 mounting flange

P1 P2

Displacement P1 & P2

Volumetric displacement (ml/rev.)

B14 = 44,0	B31 = 99,2
B17 = 55,0	B35 = 113,4
B20 = 66,0	B38 = 120,6
B22 = 70,3	B42 = 137,5
B24 = 81,1	045 = 145,7
B28 = 90,0	050 = 158,0

Type of shaft T7DDS

1 = keyed (SAE C)	3 = splined (SAE C) 14 teeth
2 = keyed (SAE CC)	4 = splined (SAE BB)

Type of shaft - T7DD and T7DDS

5 = keyed (ISO 3019-2 - G32M)

Modifications

Mounting w/connection variables

4 bolts SAE flanges J518

P1 & P2 = 1,1/4" - S = 4"		
Type	Metric thread	UNC thread
T7DD	M0	
T7DDS	M0	00

Seal class

1 = S1 BUNA N - 0,7 bar max. (for mineral oil)

4 = S4 EPDM - 7 bar max. (for fire resistant fluids)

5 = S5 VITON® - 7 bar max. (for mineral oil and fire resistant fluids)

Design letter

Porting combination (see page 72)


00 = standard

Direction of rotation (shaft end view)

R = Clockwise

L = Counter-clockwise


INTERNAL LEAKAGE (TYPICAL)

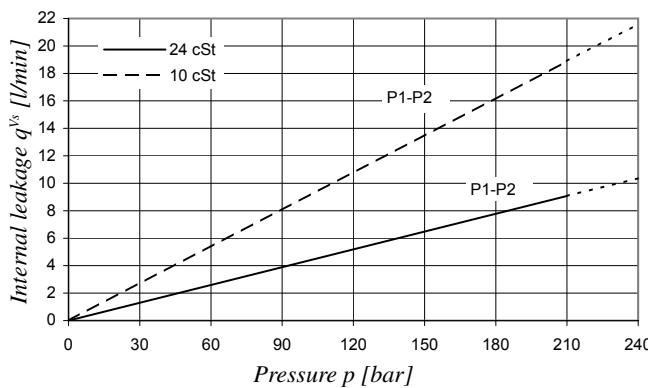

Do not operate pump more than 5 seconds at any speed or viscosity if internal leakage is higher than 50% of theoretical flow.


Total leakage is the sum of each section loss under its respective operating conditions.

POWER LOSS HYDROMECHANICAL (TYPICAL)

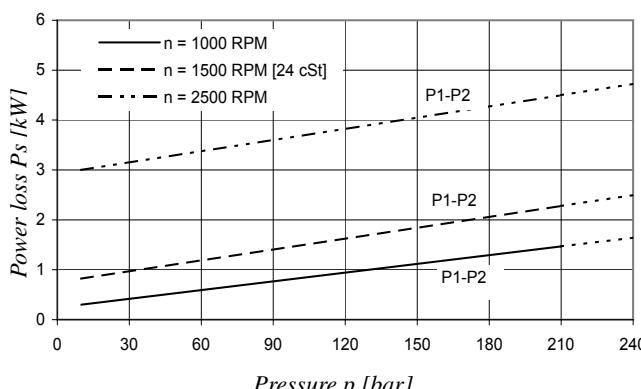


Total hydromechanical power loss is the sum of each section loss under its respective operating conditions.

NOISE LEVEL (TYPICAL) - T7DDS - B31 - B31

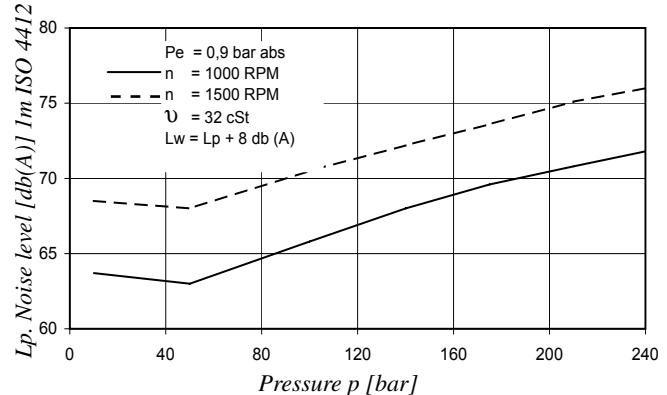


Double pump noise level is given with both stages discharging at the pressure value indicated on the curve.

PERMISSIBLE RADIAL LOAD

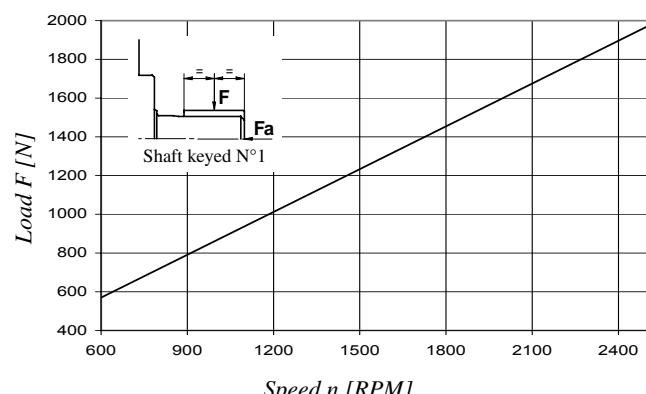

Maximum permissible axial load $F_a = 1200 \text{ N}$

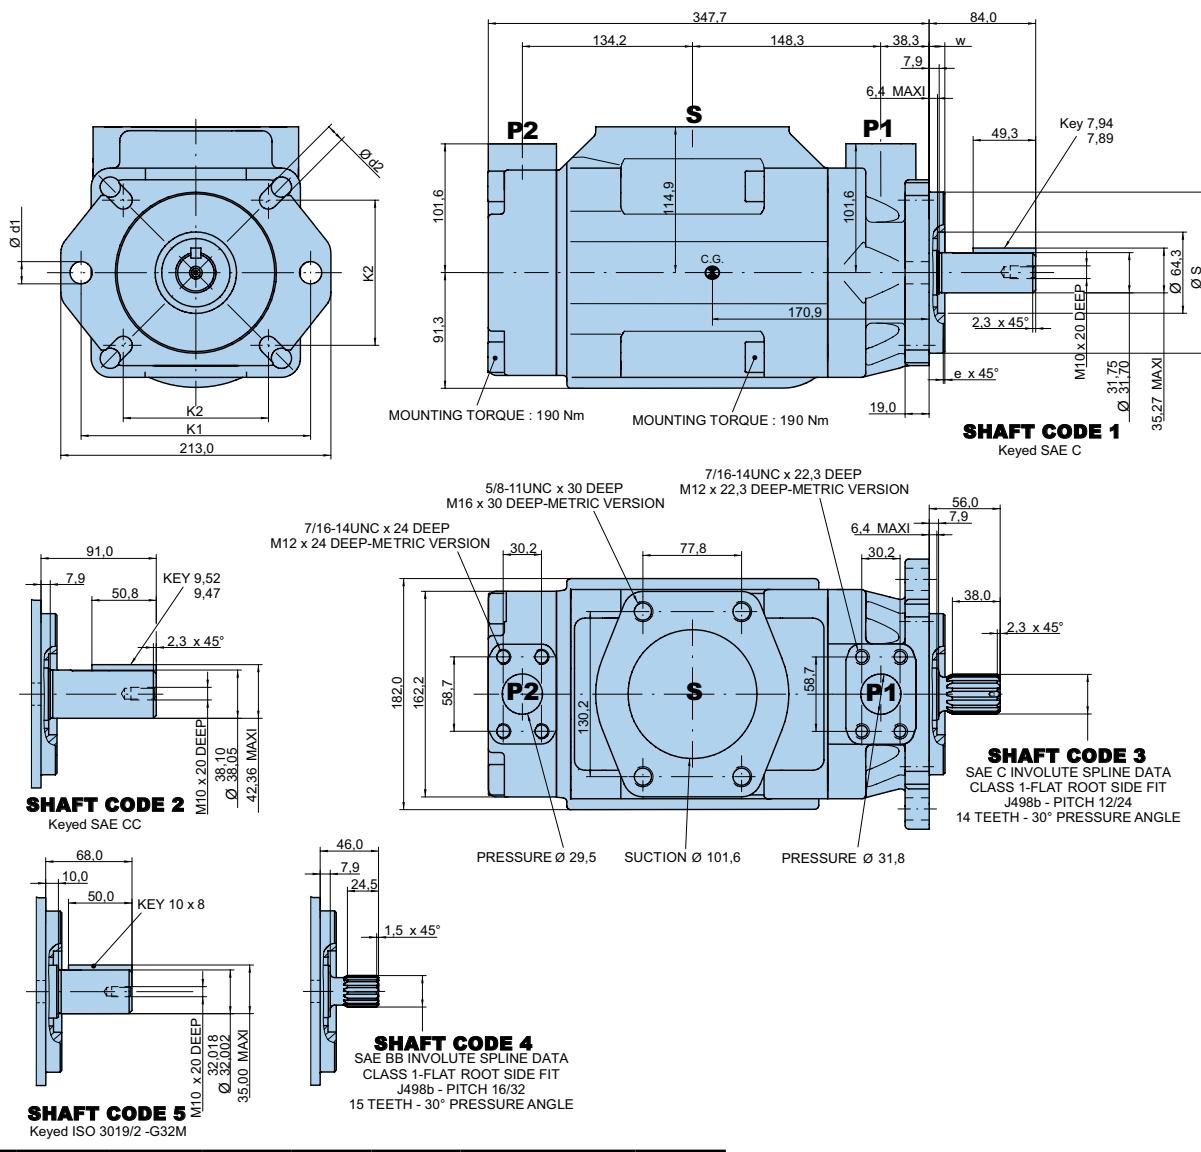

Alternate mounting flange						
Series	Dia S		$e \times 45^\circ$	W	K1	Dia d1
	Max.	Min.				
T7DD	125,000	124,937	2,0	9,5	180,0	18,0
T7DDS	127,000	126,950	1,3	12,7	181,0	17,5

Shaft torque limits [ml/rev. x bar]			
Shaft	Vi x p max.	Shaft	Vi x p max.
1	43240	4	35880
2	71750	5	45200
3	61200		

OPERATING CHARACTERISTICS - TYPICAL [24 cSt]

Pressure port	Series	Vi Volumetric displacement	Flow q_v [l/min] & n = 1500 RPM			Input power P [kW] & n = 1500 RPM		
			p = 0 bar	p = 140 bar	p = 250 bar	p = 7 bar	p = 140 bar	p = 250 bar
P1 & P2	B14	44,0 ml/rev	66,0	59,4	54,2	1,5	16,6	29,0
	B17	55,0 ml/rev	82,5	75,9	70,7	1,7	20,4	35,8
	B20	66,0 ml/rev	99,0	92,4	87,2	1,9	24,3	42,7
	B22	70,3 ml/rev	105,5	98,8	93,7	2,0	25,8	45,4
	B24	81,1 ml/rev	121,7	115,0	109,9	2,2	29,5	52,1
	B28	90,0 ml/rev	135,0	128,4	123,2	2,3	32,7	57,7
	B31	99,2 ml/rev	148,8	142,2	137,0	2,5	35,9	63,5
	B35	113,4 ml/rev	170,1	163,5	158,3	2,7	40,8	72,3
	B38	120,6 ml/rev	180,9	174,3	169,1	2,9	43,4	76,8
	B42	137,5 ml/rev	206,3	199,6	194,5	3,2	49,3	87,4
	045	145,7 ml/rev	218,6	209,2	202,6 ¹⁾	4,1	52,8	89,5 ¹⁾
	050	158,0 ml/rev	237,0	227,7	223,0 ²⁾	4,4	57,1	85,0 ²⁾

¹⁾ 045 = 240 bar max. int.²⁾ 050 = 210 bar max. int.

Model No.**T7EB or T7EBS - 042 - B12 - 1 R 00 - A 1 M1 - ..**

T7EB series - ISO 2 bolts 3019-2

Mounting flange 125-A2 HW

T7EBS series - SAE C 2 bolts

J744 mounting flange

P1

P2

Modifications**Displacement P1**

Volumetric displacement (ml/rev.)

042 = 132,3	057 = 183,3
045 = 142,4	062 = 196,7
050 = 158,5	066 = 213,3
052 = 164,8	072 = 227,1
054 = 171,0	085 = 268,7

Displacement P2

Volumetric displacement (ml/rev.)

B02 = 5,8	B09 = 28,0
B03 = 9,8	B10 = 31,8
B04 = 12,8	B11 = 35,0
B05 = 15,9	B12 = 41,0
B06 = 19,8	B14 = 45,0
B07 = 22,5	B15 = 50,0
B08 = 24,9	

Type of shaft T7EBS

1 = keyed (SAE CC) 3 = splined (SAE C) 14 teeth

2 = keyed (non SAE) 4 = splined (SAE CC)

Type of shaft T7EB - T7EBS

5 = keyed (ISO /R 775 - G38 M)

Mounting w/connection variables

4 bolts SAE flanges J518

P1 = 1.1/2" - P2 = 3/4" - S = 3.1/2"

	Metric thread T7EB - T7EBS	UNC thread T7EBS
Code	M1	01

Seal class

1 = S1 BUNA N - 0,7 bar max. (for mineral oil)

4 = S4 EPDM - 7 bar max. (for fire resistant fluids)

5 = S5 VITON® - 7 bar max. (for mineral oil and fire resistant fluids)


Design letter**Porting combination (see page 72)**

0 = standard

Direction of rotation (shaft end view)


R = Clockwise

L = Counter-clockwise

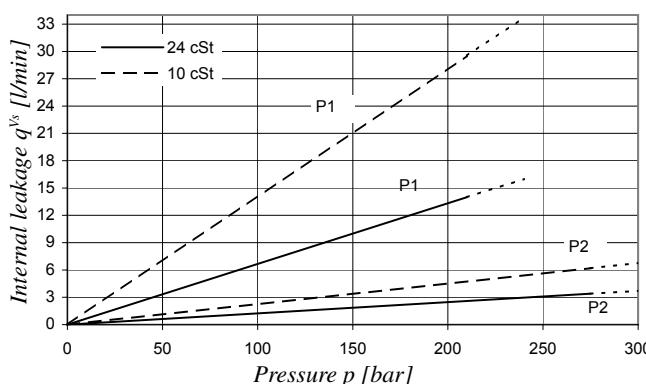
INTERNAL LEAKAGE (TYPICAL)

Do not operate pump more than 5 seconds at any speed or viscosity if internal leakage is higher than 50% of theoretical flow.


Total leakage is the sum of each section loss under its respective operating conditions.

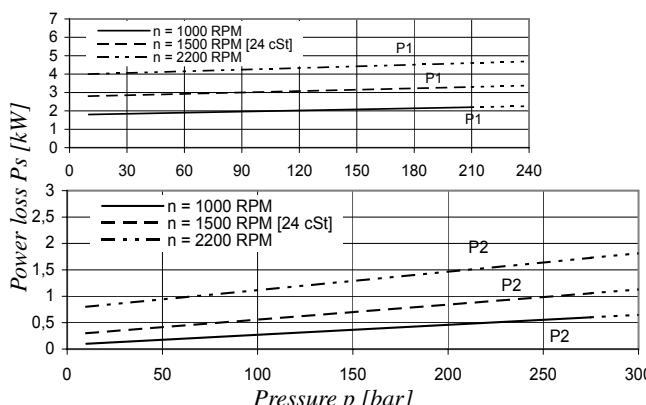POWER LOSS HYDROMECHANICAL (TYPICAL)


Total hydromechanical power loss is the sum of each section loss under its respective operating conditions.

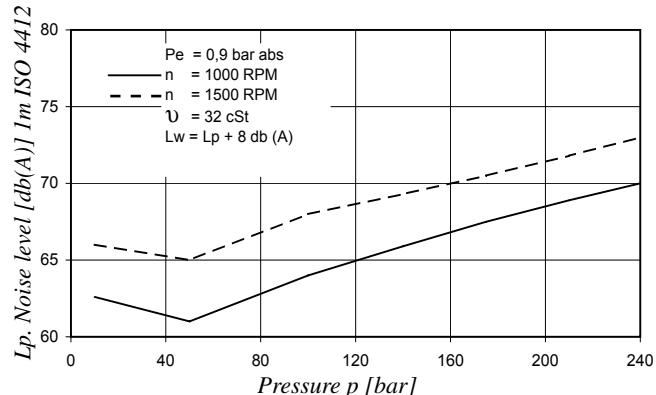NOISE LEVEL (TYPICAL) - T7EBS - 050 - B03

Double pump noise level is given with both stages discharging at the pressure value indicated on the curve.

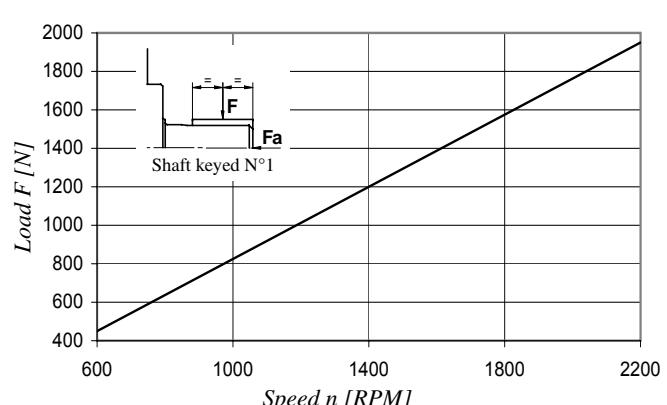PERMISSIBLE RADIAL LOAD

Maximum permissible axial load $F_a = 2000$ N

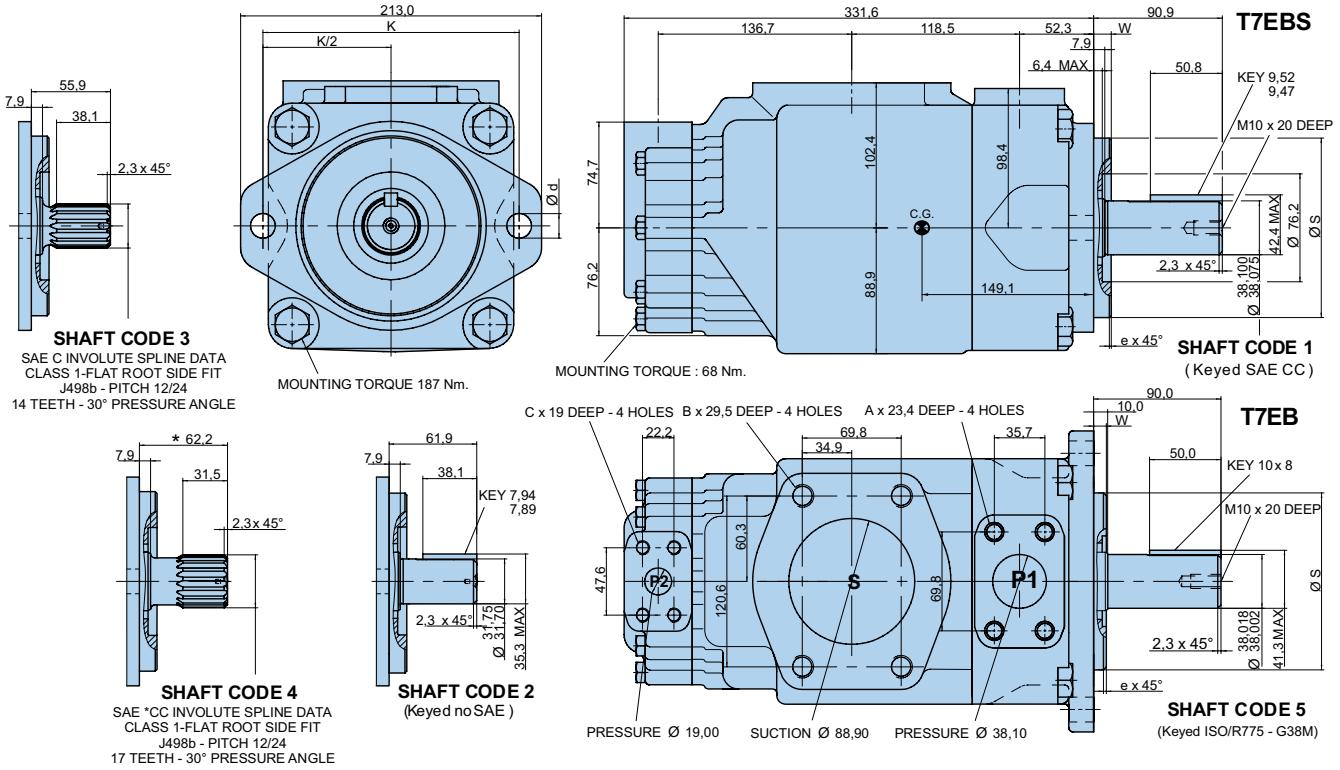

Alternate mounting flange					
	Dia S	e x 45°	W	K	Dia d
	Max.	Min.			
T7EB	125,000	124,937	2,0	9,5	180,0
T7EBS	127,000	126,950	1,3	12,7	181,0

Alternate connect. variables		
	01	M1
A	1/2" - 13 UNC	M12
B	5/8" - 11 UNC	M16
C	3/8" - 16 UNC	M10

Shaft torque limits [ml/rev. x bar]			
Shaft	Vi x p max.	Shaft	Vi x p max.
1	68500	4	68500
2	34590	5	68500
3	61200		

OPERATING CHARACTERISTICS - TYPICAL [24 cSt]

Pressure port	Series	Vi Volumetric displacement	Flow q _v [l/min] & n = 1500 RPM			Input power P [kW] & n = 1500 RPM		
			p = 0 bar	p = 140 bar	p = 240 bar	p = 7 bar	p = 140 bar	p = 240 bar
P1	042	132,3 ml/rev	198,5	188,5	181,3	5,2	49,4	82,6
	045	142,4 ml/rev	213,6	203,6	196,5	5,4	52,9	88,7
	050	158,5 ml/rev	237,7	227,7	220,6	5,7	58,5	98,3
	052	164,8 ml/rev	247,2	237,2	230,1	5,8	60,8	102,1
	054	171,0 ml/rev	256,5	246,5	239,4	5,9	63,0	105,8
	057	183,3 ml/rev	275,0	265,0	257,9	6,1	67,3	113,2
	062	196,7 ml/rev	295,0	285,0	277,9	6,4	71,9	121,3
	066	213,3 ml/rev	319,9	309,0	302,8	6,7	77,7	131,2
	072	227,1 ml/rev	340,6	330,6	323,5	6,9	82,6	139,5
P2	085	268,7 ml/rev	403,0	392,0 ¹⁾	-	9,1	65,8 ¹⁾	-
	p = 0 bar			p = 140 bar			p = 300 bar	
	B02	5,8 ml/rev	8,7	7,0	5,1	0,5	2,6	5,1
	B03	9,8 ml/rev	14,7	13,0	11,1	0,6	4,0	8,1
	B04	12,8 ml/rev	19,2	17,5	15,6	0,6	5,0	10,4
	B05	15,9 ml/rev	23,9	22,2	20,2	0,7	6,1	12,7
	B06	19,8 ml/rev	29,7	28,0	26,1	0,7	7,5	15,6
	B07	22,5 ml/rev	33,7	32,0	30,2	0,8	8,5	17,6
	B08	24,9 ml/rev	37,4	35,7	33,7	0,8	9,3	19,5
	B09	28,0 ml/rev	42,0	40,3	38,4	0,9	10,4	21,8
	B10	31,8 ml/rev	47,7	46,0	44,1	0,9	11,7	26,2
	B11	35,0 ml/rev	52,5	50,8	48,9	1,0	12,8	27,0
	B12	41,0 ml/rev	61,5	59,8	57,9	1,1	14,9	31,5
	B14	45,0 ml/rev	67,5	65,8	63,9	1,2	16,3	34,5
	B15	50,0 ml/rev	75,0	73,3	71,6 ²⁾	1,3	18,1	35,7 ²⁾

¹⁾ 085 = 90 bar max. int.²⁾ B15 = 280 bar max.int.

Model No.Series - SAE C 2 bolts
J744 mounting flange**T67EC - 085 - 020 - 1 R 00 - A 1 00 - ..****Modifications****Displacement P1**

Volumetric displacement (ml/rev.)

042 = 132,3	057 = 183,3
045 = 142,4	062 = 196,7
050 = 158,5	066 = 213,3
052 = 164,8	072 = 227,1
054 = 171,0	085 = 268,7


Displacement P2

Volumetric displacement (ml/rev.)

003 = 10,8	017 = 58,3
005 = 17,2	020 = 63,8
006 = 21,3	022 = 70,3
008 = 26,4	025 = 79,3
010 = 34,1	028 = 88,8
012 = 37,1	031 = 100,0
014 = 46,0	


Type of shaft

- 1 = keyed (SAE CC)
 2 = keyed (non SAE)
 3 = splined (SAE C) 14 teeth
 4 = splined (SAE CC) 17 teeth

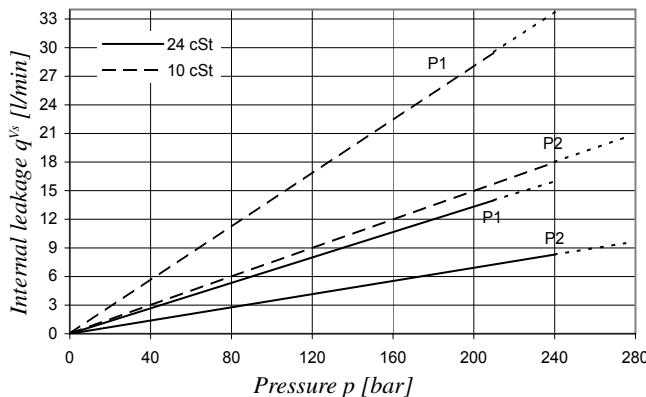
INTERNAL LEAKAGE (TYPICAL)

Do not operate pump more than 5 seconds at any speed or viscosity if internal leakage is higher than 50% of theoretical flow.


Total leakage is the sum of each section loss under its respective operating conditions.

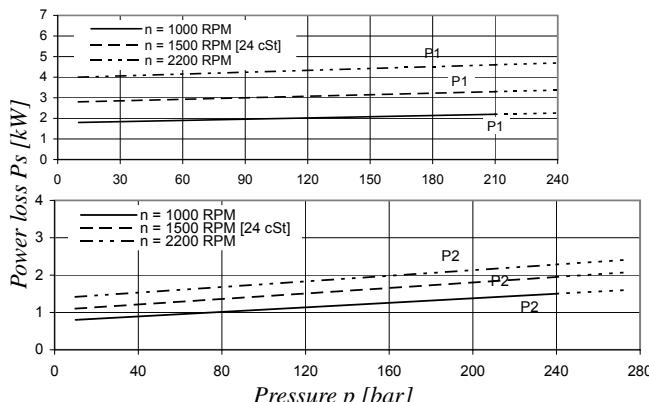POWER LOSS HYDROMECHANICAL (TYPICAL)


Total hydromechanical power loss is the sum of each section loss under its respective operating conditions.

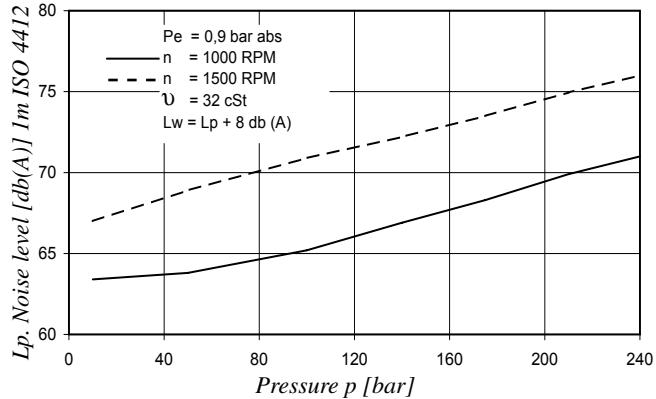NOISE LEVEL (TYPICAL) - T67EC - 050 - 022

Double pump noise level is given with both stages discharging at the pressure value indicated on the curve.

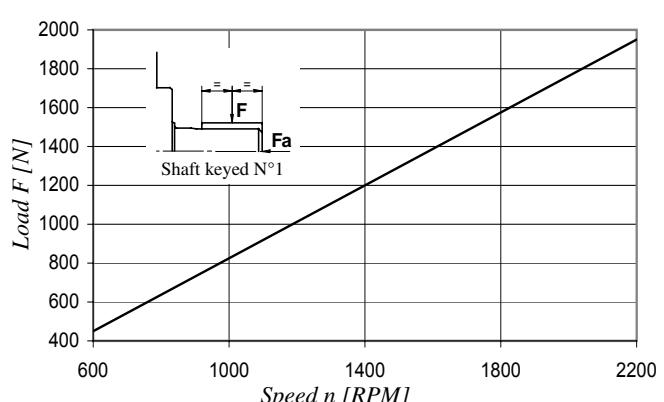PERMISSIBLE RADIAL LOAD

Maximum permissible axial load Fa = 2000 N

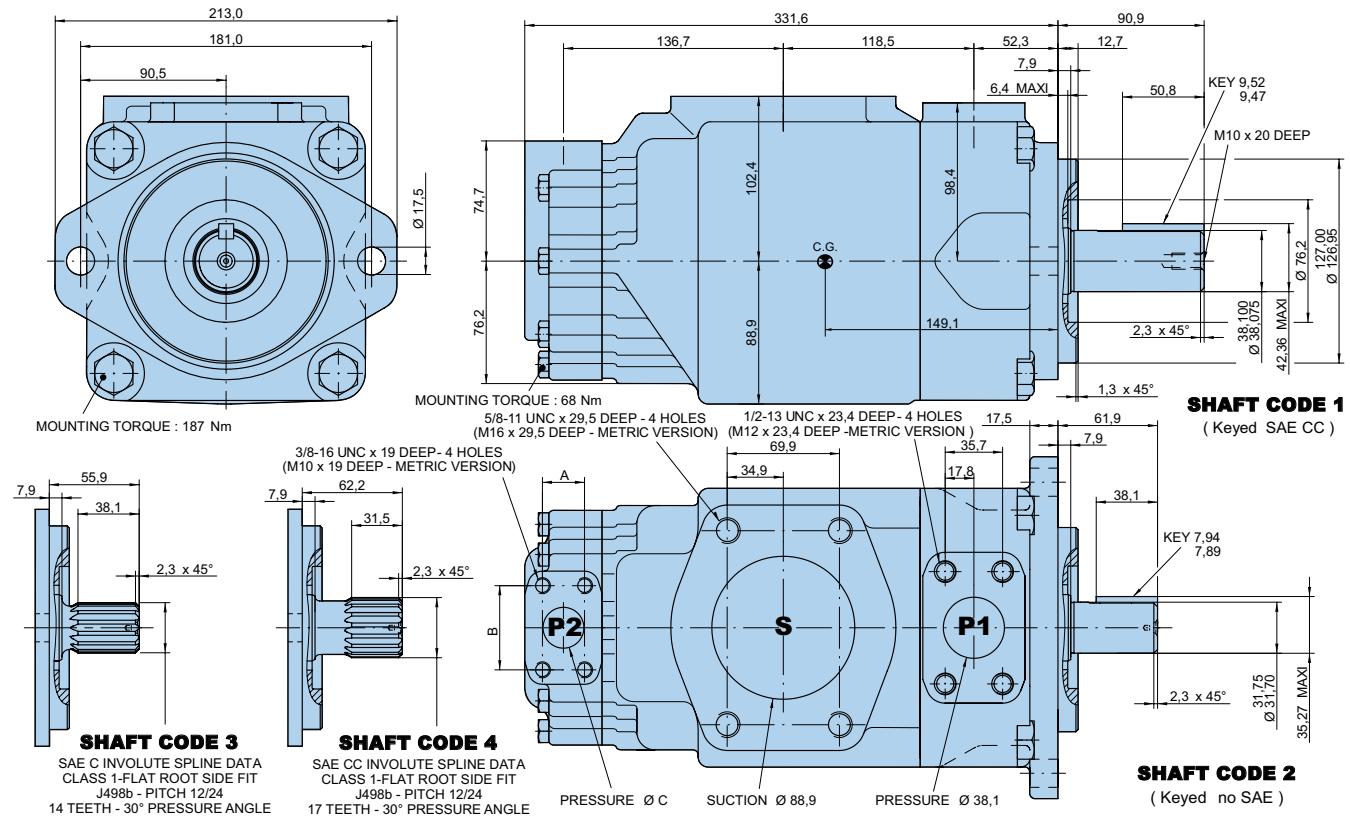

OPERATING CHARACTERISTICS - TYPICAL [24 cSt]

Pressure port	Series	Vi Volumetric displacement	Flow q_{V_e} [l/min] & n = 1500 RPM			Input power P [kW] & n = 1500 RPM		
			p = 0 bar	p = 140 bar	p = 240 bar	p = 7 bar	p = 140 bar	p = 240 bar
P1	042	132,3 ml/rev	198,5	188,5	181,3	5,2	49,4	82,6
	045	142,4 ml/rev	213,6	203,6	196,5	5,4	52,9	88,7
	050	158,5 ml/rev	237,7	227,7	220,6	5,7	58,5	98,3
	052	164,8 ml/rev	247,2	237,2	230,1	5,8	60,8	102,1
	054	171,0 ml/rev	256,5	246,5	239,4	5,9	63,0	105,8
	057	183,3 ml/rev	275,0	265,0	257,9	6,1	67,3	113,2
	062	196,7 ml/rev	295,0	285,0	277,9	6,4	71,9	121,3
	066	213,3 ml/rev	319,9	309,0	302,8	6,7	77,7	131,2
	072	227,1 ml/rev	340,6	330,6	323,5	6,9	82,6	139,5
	085	268,7 ml/rev	403,0	392,0 ¹⁾	-	9,1	65,8 ¹⁾	-
P2		p = 0 bar	p = 140 bar	p = 275 bar	p = 7 bar	p = 140 bar	p = 275 bar	
	003	10,8 ml/rev	16,2	11,2	*	1,3	5,3	*
	005	17,2 ml/rev	25,8	20,8	16,1	1,4	7,5	13,9
	006	21,3 ml/rev	31,9	26,9	22,2	1,5	8,9	16,8
	008	26,4 ml/rev	39,6	34,6	29,9	1,6	10,7	20,3
	010	34,1 ml/rev	51,1	46,1	41,4	1,7	13,4	25,6
	012	37,1 ml/rev	55,6	50,6	45,9	1,7	14,4	27,6
	014	46,0 ml/rev	69,0	64,0	59,3	1,9	17,6	33,7
	017	58,3 ml/rev	87,4	82,4	77,7	2,1	21,9	42,2
	020	63,8 ml/rev	95,7	90,7	86,0	2,2	23,8	46,0
	022	70,3 ml/rev	105,4	100,4	95,7	2,3	26,1	50,4
	025	79,3 ml/rev	118,9	113,9	109,2	2,5	29,2	56,6
	028	88,8 ml/rev	133,2	128,2	125,8 ²⁾	2,8	32,7	48,5 ²⁾
	031	100,0 ml/rev	150,0	145,0	142,6 ²⁾	2,8	36,5	54,4 ²⁾

* We do not recommend to use the size 003 in P2 at 275 bar & 1500 RPM as the internal leakage is over 50% of theoretical flow.

¹⁾ 085 = 90 bar max. int. ²⁾ 028 - 031 = 210 bar max.int.

Model No.**T7ED or T7EDS - 042 - B22 - 1 R 00 - A 1 M0 - ..**

T7ED series - ISO 2 bolts 3019-2

mounting flange 125 A2 HW

T7EDS series - SAE C 2 bolts

J744 mounting flange

P1

P2

Displacement P1

Volumetric displacement (ml/rev.)

042 = 132,3	057 = 183,3
045 = 142,4	062 = 196,7
050 = 158,5	066 = 213,3
052 = 164,8	072 = 227,1
054 = 171,0	085 = 268,7

Displacement P2

Volumetric displacement (ml/rev.)


B14 = 44,0	B31 = 99,2
B17 = 55,0	B35 = 113,4
B20 = 66,0	B38 = 120,6
B22 = 70,3	B42 = 137,5
B24 = 81,1	045 = 145,7
B28 = 90,0	050 = 158,0

Type of shaft T7EDS

1 = keyed (SAE CC)	3 = splined (SAE C) 14 teeth
2 = keyed (non SAE)	4 = splined (SAE CC) 17 teeth


Type of shaft T7ED - T7EDS

5 = keyed (ISO R775 - G38M)

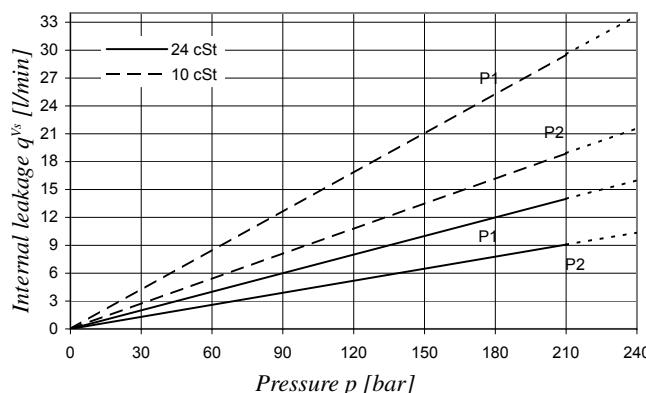
INTERNAL LEAKAGE (TYPICAL)

Do not operate pump more than 5 seconds at any speed or viscosity if internal leakage is higher than 50% of theoretical flow.


Total leakage is the sum of each section loss under its respective operating conditions.

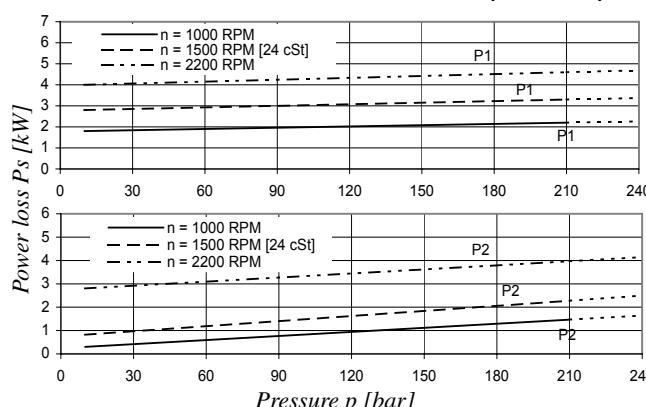POWER LOSS HYDROMECHANICAL (TYPICAL)


Total hydromechanical power loss is the sum of each section loss under its respective operating conditions.

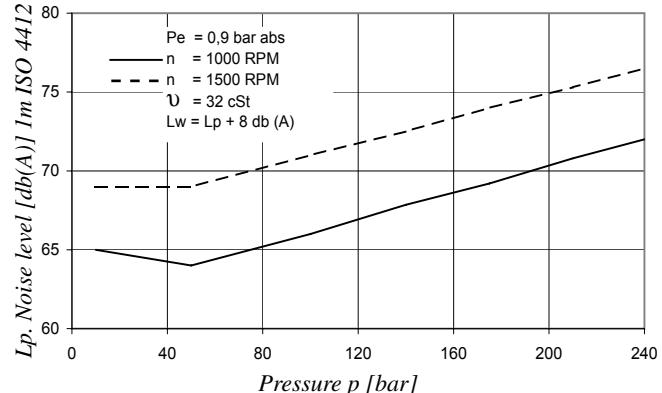NOISE LEVEL (TYPICAL) - T7EDS - 050 - B31

Double pump noise level is given with both stages discharging at the pressure value indicated on the curve.

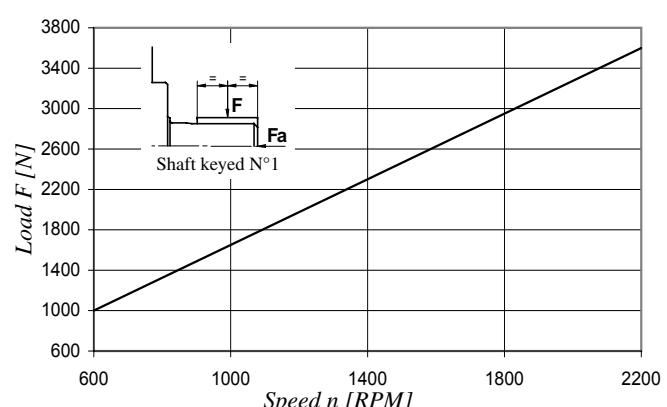PERMISSIBLE RADIAL LOAD

Maximum permissible axial load $F_a = 2000$ N

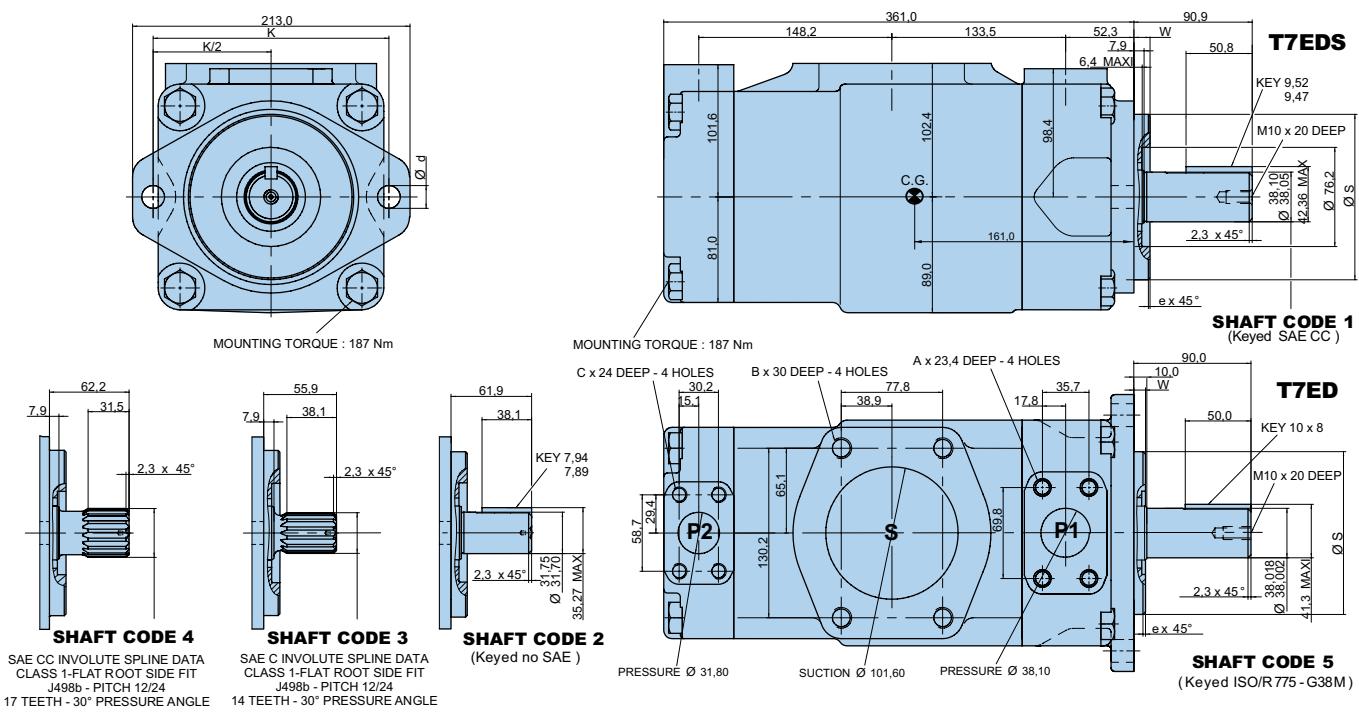

Alternate mounting flange					
	Dia S		e x 45°	W	K
	Max.	Min.			
T7ED	125,000	124,937	2,0	9,5	180,0
T7EDS	127,000	126,950	1,3	12,7	181,0
					17,5

Alternate connect. variables	
	00 M0
A	1/2" - 13 UNC
B	5/8" - 11 UNC
C	7/16" - 14 UNC

Shaft torque limits [ml/rev. x bar]			
Shaft	Vi x p max.	Shaft	Vi x p max.
1	72300	4	68500
2	34590	5	68500
3	61200		

OPERATING CHARACTERISTICS - TYPICAL [24 cSt]

Pressure port	Series	Vi Volumetric displacement	Flow q _v [l/min] & n = 1500 RPM			Input power P [kW] & n = 1500 RPM		
			p = 0 bar	p = 140 bar	p = 240 bar	p = 7 bar	p = 140 bar	p = 240 bar
P1	042	132,3 ml/rev	198,5	188,5	181,3	5,2	49,4	82,6
	045	142,4 ml/rev	213,6	203,6	196,5	5,4	52,9	88,7
	050	158,5 ml/rev	237,7	227,7	220,6	5,7	58,5	98,3
	052	164,8 ml/rev	247,2	237,2	230,1	5,8	60,8	102,1
	054	171,0 ml/rev	256,5	246,5	239,4	5,9	63,0	105,8
	057	183,3 ml/rev	275,0	265,0	257,9	6,1	67,3	113,2
	062	196,7 ml/rev	295,0	285,0	277,9	6,4	71,9	121,3
	066	213,3 ml/rev	319,9	309,0	302,8	6,7	77,7	131,2
	072	227,1 ml/rev	340,6	330,6	323,5	6,9	82,6	139,5
P2	085	268,7 ml/rev	403,0	392,0 ¹⁾	-	9,1	65,8 ¹⁾	-
			p = 0 bar	p = 140 bar	p = 250 bar	p = 7 bar	p = 140 bar	p = 250 bar
	B14	44,0 ml/rev	66,0	59,4	54,2	1,5	16,6	29,0
	B17	55,0 ml/rev	82,5	75,9	70,7	1,7	20,4	35,8
	B20	66,0 ml/rev	99,0	92,4	87,2	1,9	24,3	42,7
	B22	70,3 ml/rev	105,5	98,8	93,7	2,0	25,8	45,4
	B24	81,1 ml/rev	121,7	115,0	109,9	2,2	29,5	52,1
	B28	90,0 ml/rev	135,0	128,4	123,2	2,3	32,7	57,7
	B31	99,2 ml/rev	148,8	142,2	137,0	2,5	35,9	63,5
	B35	113,4 ml/rev	170,1	163,5	158,3	2,7	40,8	72,3
	B38	120,6 ml/rev	180,9	174,3	169,1	2,9	43,4	76,8
	B42	137,5 ml/rev	206,3	199,6	194,5	3,2	49,3	87,4
	045	145,7 ml/rev	218,6	209,2	202,6 ³⁾	4,1	52,8	89,5 ³⁾
	050	158,0 ml/rev	237,0	227,7	223,0 ²⁾	4,4	57,1	85,0 ²⁾

¹⁾ 085 = 90 bar max. int.²⁾ 050 = 210 bar max. int.³⁾ 045 = 240 bar max. int.

Model No.**T7EE or T7EES - 066 - 045 - 1 R 00 - A 1 0 00 - ..**

T7EE series - ISO 4 bolts 3019-2

Mounting flange 250 B4 HW

T7EES series - SAE E 4 bolts

J744 mounting flange

P1 P2

Displacement P1 & P2

Volumetric displacement (ml/rev.)

042 = 132,3 057 = 183,3

045 = 142,4 062 = 196,7

050 = 158,5 066 = 213,3

052 = 164,8 072 = 227,1

054 = 171,0 085 = 268,7

Type of shaft T7EES1 = keyed (SAE CC) 4 = splined (SAE D & E) 13 teeth
3 = splined (SAE CC) 17 teeth 5 = keyed (SAE D & E)**Type of shaft T7EE**

2 = keyed (ISO 3019-2 - G45N)

Direction of rotation (shaft end view)

R = Clockwise

L = Counter-clockwise

Modifications**Mounting w/connection variables**


4 bolts SAE flanges J518

P1 & P2 = 1.1/2" - S = 4"		
	T7EE - T7EES	T7EES
Type	Metric thread	UNC thread
Code	M0	00

Coupling adaptor	
0	= none
2	= SAE B
3	= SAE BB
*	for SAE C, please contact Parker


Seal class1 = S1 BUNA N - 0,7 bar max. (for mineral oil)
4 = S4 EPDM - 7 bar max. (for fire resistant fluids)
5 = S5 VITON® - 7 bar max. (for mineral oil and fire
resistant fluids)**Design letter**

Porting combination (see page 72)	
00	= standard

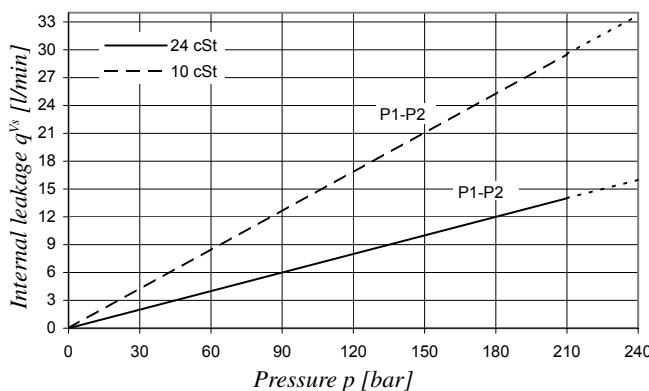
INTERNAL LEAKAGE (TYPICAL)

Do not operate pump more than 5 seconds at any speed or viscosity if internal leakage is higher than 50% of theoretical flow.


Total leakage is the sum of each section loss under its respective operating conditions.

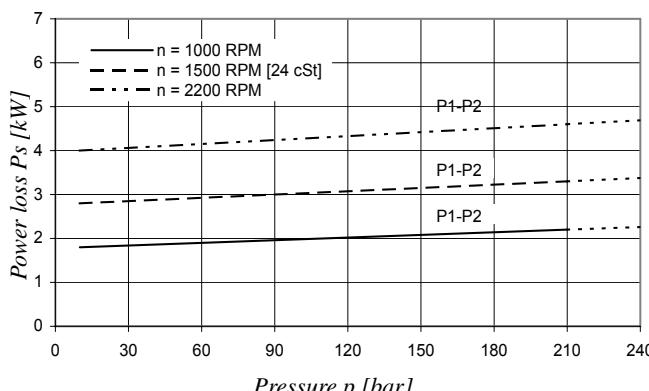POWER LOSS HYDROMECHANICAL (TYPICAL)


Total hydromechanical power loss is the sum of each section loss under its respective operating conditions.

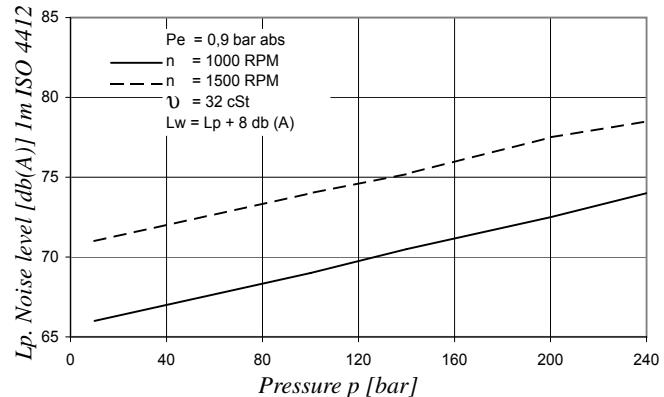NOISE LEVEL (TYPICAL) - T7EE - 050 - 050

Double pump noise level is given with both stages discharging at the pressure value indicated on the curve.

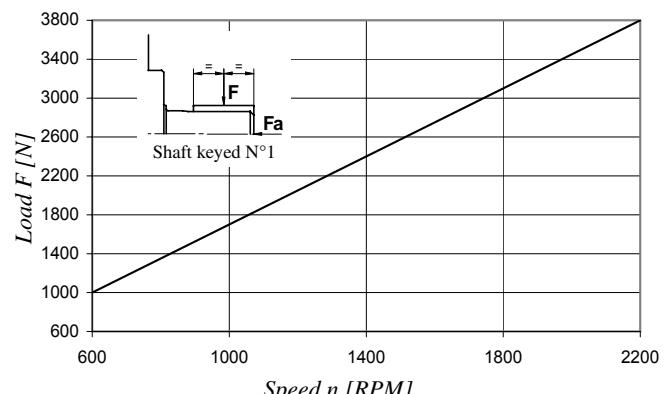
PERMISSIBLE RADIAL LOAD

Maximum permissible axial load $F_a = 2000 \text{ N}$

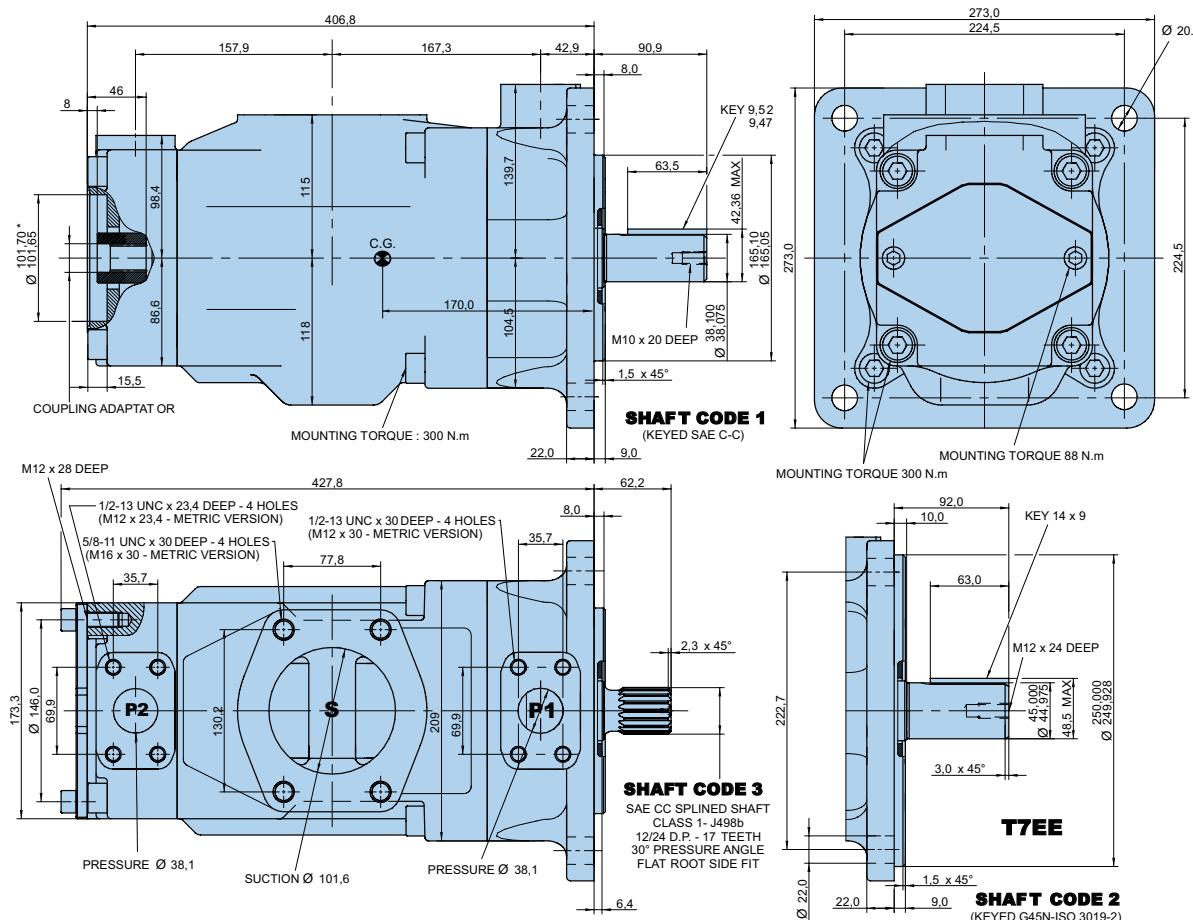

Code	Coupling adaptor
0	Without coupling
2	SAE B - 13 teeth - Pitch 16/32 Major dia. (min.) 22,225 - Minor dia. (min.) 19,134
3	SAE BB - 15 teeth - Pitch 16/32 Major dia. (min.) 25,400 - Minor dia. (min.) 22,268

Shaft torque limits [ml/rev. x bar]			
Shaft	Vi x p max.	Coupling drive	Vi x p max.
1	90380	SAE B	20600
2	114600	SAE BB	32670
3	126800		
4	126800		
5	118340		

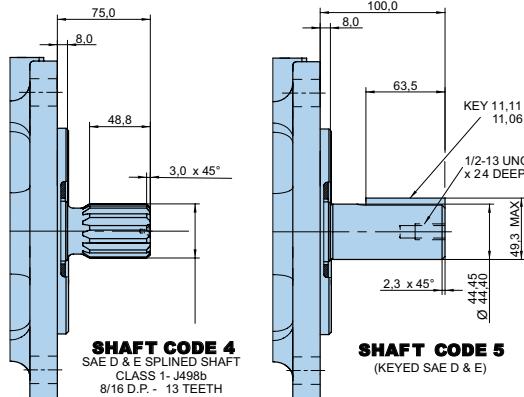

OPERATING CHARACTERISTICS - TYPICAL [24 cSt]

OPERATING CHARACTERISTICS - TYPICAL [24°C]								
Pressure port	Series	Vi Volumetric displacement	Flow q_{Vc} [l/min] & n = 1500 RPM			Input power P [kW] & n = 1500 RPM		
			p = 0 bar	p = 140 bar	p = 240 bar	p = 7 bar	p = 140 bar	p = 240 bar
P1	042	132,3 ml/rev	198,5	188,5	181,3	5,2	49,4	82,6
	045	142,4 ml/rev	213,6	203,6	196,5	5,4	52,9	88,7
	050	158,5 ml/rev	237,7	227,7	220,6	5,7	58,5	98,3
	052	164,8 ml/rev	247,2	237,2	230,1	5,8	60,8	102,1
	054	171,0 ml/rev	256,5	246,5	239,4	5,9	63,0	105,8
P2	057	183,3 ml/rev	275,0	265,0	257,9	6,1	67,3	113,2
	062	196,7 ml/rev	295,0	285,0	277,9	6,4	71,9	121,3
	066	213,3 ml/rev	319,9	309,0	302,8	6,7	77,7	131,2
	072	227,1 ml/rev	340,6	330,6	323,5	6,9	82,6	139,5
	085	268,7 ml/rev	403,0	392,0 ¹⁾	-	9,1	65,8 ¹⁾	-

$$1) \quad 085 = 90 \text{ bar max. int.}$$

* For SAE C, please contact Parker.

Model No.

T7DBB or T7DBBS - B38 - B14 - B08 - 1 R 00 - A 1 - M1 - ..

T7DBB series - ISO 6 bolts 3019-2
Mounting flange 125-A2-HW or 125-B4-HW

P1 P2 P3

Modifications

T7DBBS series - SAE C 6 bolts
J744 mounting flange

Displacement for "P1"

Volumetric displacement (ml/rev)
 B14 = 44,0 B31 = 99,2
 B17 = 55,0 B35 = 113,4
 B20 = 66,0 B38 = 120,6
 B22 = 70,3 B42 = 137,5
 B24 = 81,1 045 = 145,7
 B28 = 90,0 050 = 158,0

Displacement for "P2" & "P3"

Volumetric displacement (ml/rev)
 B02 = 5,8 B09 = 28,0
 B03 = 9,8 B10 = 31,8
 B04 = 12,8 B11 = 35,0
 B05 = 15,9 B12 = 41,0
 B06 = 19,8 B14 = 45,0
 B07 = 22,5 B15 = 50,0
 B08 = 24,9

Type of shaft T7DBBS

1 = keyed (non SAE)
 2 = keyed (SAE CC)
 3 = splined 12/24 (SAE C) (14 teeth)
 4 = splined 12/24 (SAE CC) (17 teeth)

Type of shaft T7DBB & T7DBBS

5 = keyed (ISO 3019/2 - G38M)

Mounting w/connection variables

4 bolts SAE flange J518

P1 = 1,1/4" - P2 = 1" - S = 4"		
	Metric thread	UNC thread
T7DBB-P3 = 3/4"	M1	
T7DBBS-P3 = 3/4"	M1	01
T7DBB-P3 = 1"	M0	
T7DBBS-P3 = 1"	M0	00

Seal class

1 = S1 BUNA N - 0,7 bar max. (for mineral oil)
 4 = S4 EPDM - 7 bar max. (for fire resistant fluids)
 5 = S5 VITON® - 7 bar max. (for mineral oil and fire resistant fluids)

Design letter

Porting combination (see pages 72 - 73)
 00 = standard

Direction of rotation (shaft end view)


R = Clockwise
 L = Counter-clockwise

OPERATING CHARACTERISTICS - TYPICAL [24 cSt]

Pressure port	Series	Vi Volumetric displacement	Flow q _v [l/min] & n = 1500 RPM			Input power P [kW] & n = 1500 RPM		
			p = 0 bar	p = 140 bar	p = 250 bar	p = 7 bar	p = 140 bar	p = 250 bar
P1	B14	44,0 ml/rev	66,0	59,4	54,2	1,5	16,6	29,0
	B17	55,0 ml/rev	82,5	75,9	70,7	1,7	20,4	35,8
	B20	66,0 ml/rev	99,0	92,4	87,2	1,9	24,3	42,7
	B22	70,3 ml/rev	105,5	98,8	93,7	2,0	25,8	45,4
	B24	81,1 ml/rev	121,7	115,0	109,9	2,2	29,5	52,1
	B28	90,0 ml/rev	135,0	128,4	123,2	2,3	32,7	57,7
	B31	99,2 ml/rev	148,8	142,2	137,0	2,5	35,9	63,5
	B35	113,4 ml/rev	170,1	163,5	158,3	2,7	40,8	72,3
	B38	120,6 ml/rev	180,9	174,3	169,1	2,9	43,4	76,8
	B42	137,5 ml/rev	206,3	199,6	194,5	3,2	49,3	87,4
P2 & P3	045	145,7 ml/rev	218,6	209,2	202,6 ¹⁾	4,1	52,8	89,5 ¹⁾
	050	158,0 ml/rev	237,0	227,7	223,0 ²⁾	4,4	57,1	85,0 ²⁾
			p = 0 bar	p = 140 bar	p = 300 bar	p = 7 bar	p = 140 bar	p = 300 bar
	B02	5,8 ml/rev	8,7	7,0	5,1	0,5	2,6	5,1
	B03	9,8 ml/rev	14,7	13,0	11,1	0,6	4,0	8,1
	B04	12,8 ml/rev	19,2	17,5	15,6	0,6	5,0	10,4
	B05	15,9 ml/rev	23,9	22,2	20,2	0,7	6,1	12,7
	B06	19,8 ml/rev	29,7	28,0	26,1	0,7	7,5	15,6
	B07	22,5 ml/rev	33,7	32,0	30,2	0,8	8,5	17,6
	B08	24,9 ml/rev	37,4	35,7	33,7	0,8	9,3	19,5


¹⁾ 045 = 240 bar max. int.²⁾ 050 = 210 bar max. int.³⁾ B15 = 280 bar max. int.

INTERNAL LEAKAGE (TYPICAL)

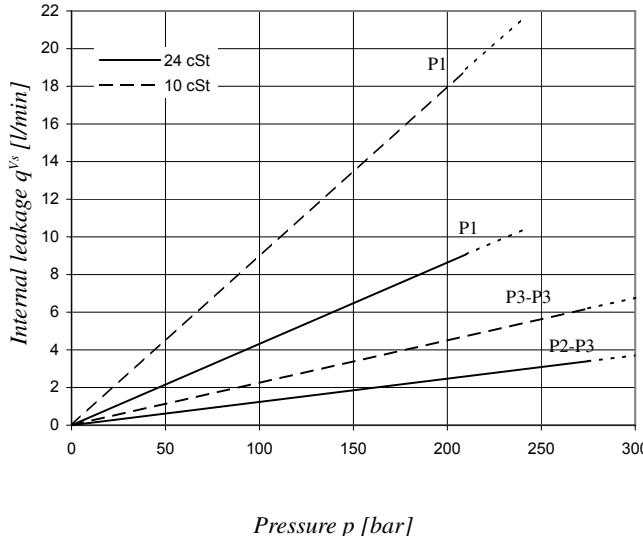


Do not operate pump more than 5 seconds at any speed or viscosity if internal leakage is higher than 50% of theoretical flow.
Total leakage is the sum of each section loss under its respective operating conditions.

NOISE LEVEL (TYPICAL) - T7DBB - B38 - B06 - B04

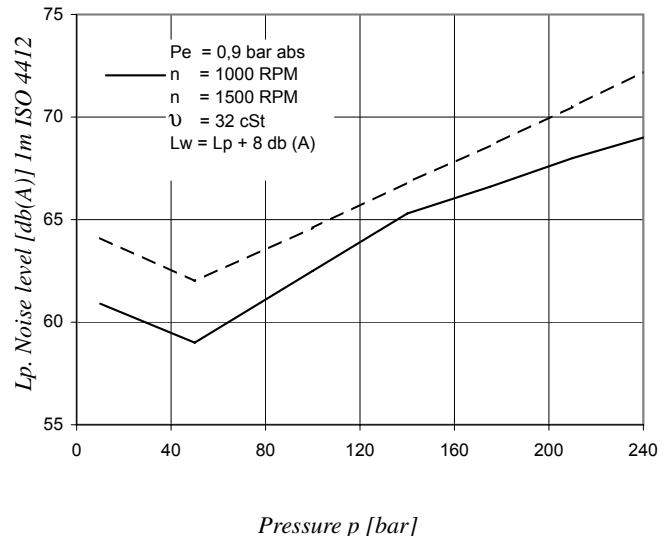


Triple pump noise level is given with all stages discharging at the pressure value indicated on the curve.

POWER LOSS HYDROMECHANICAL (TYPICAL)

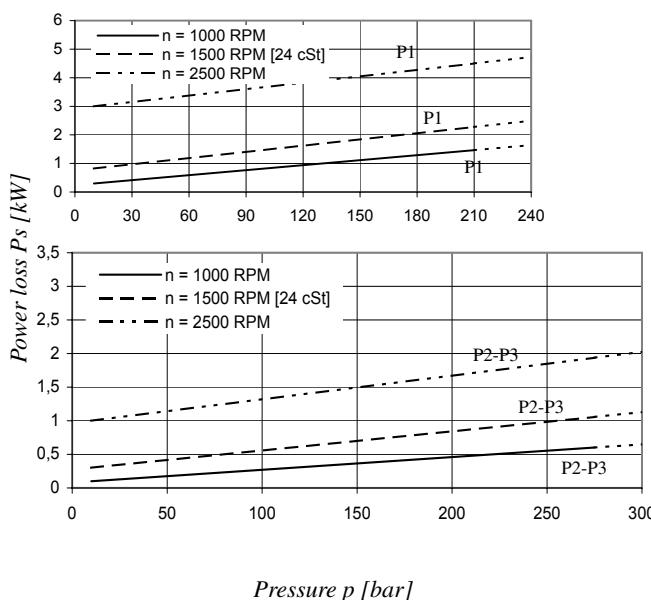


Total hydromechanical power loss is the sum of each section loss under its respective operating conditions.

PERMISSIBLE RADIAL LOAD

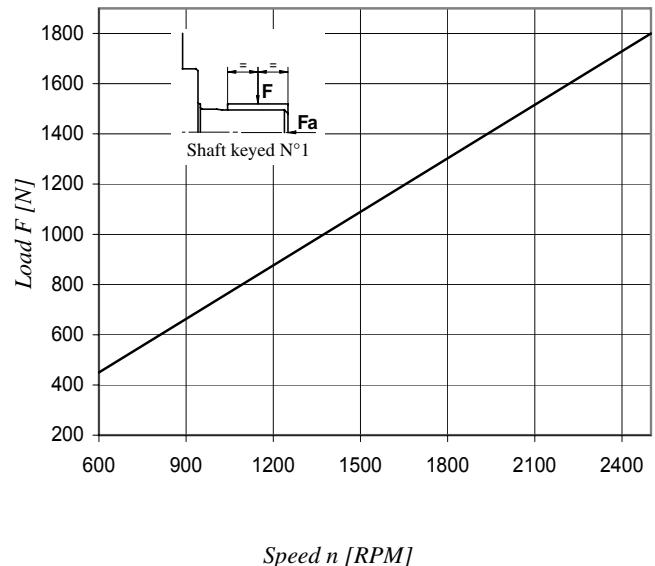

Maximum permissible axial load Fa = 1200 N

Hydraulic Pumps

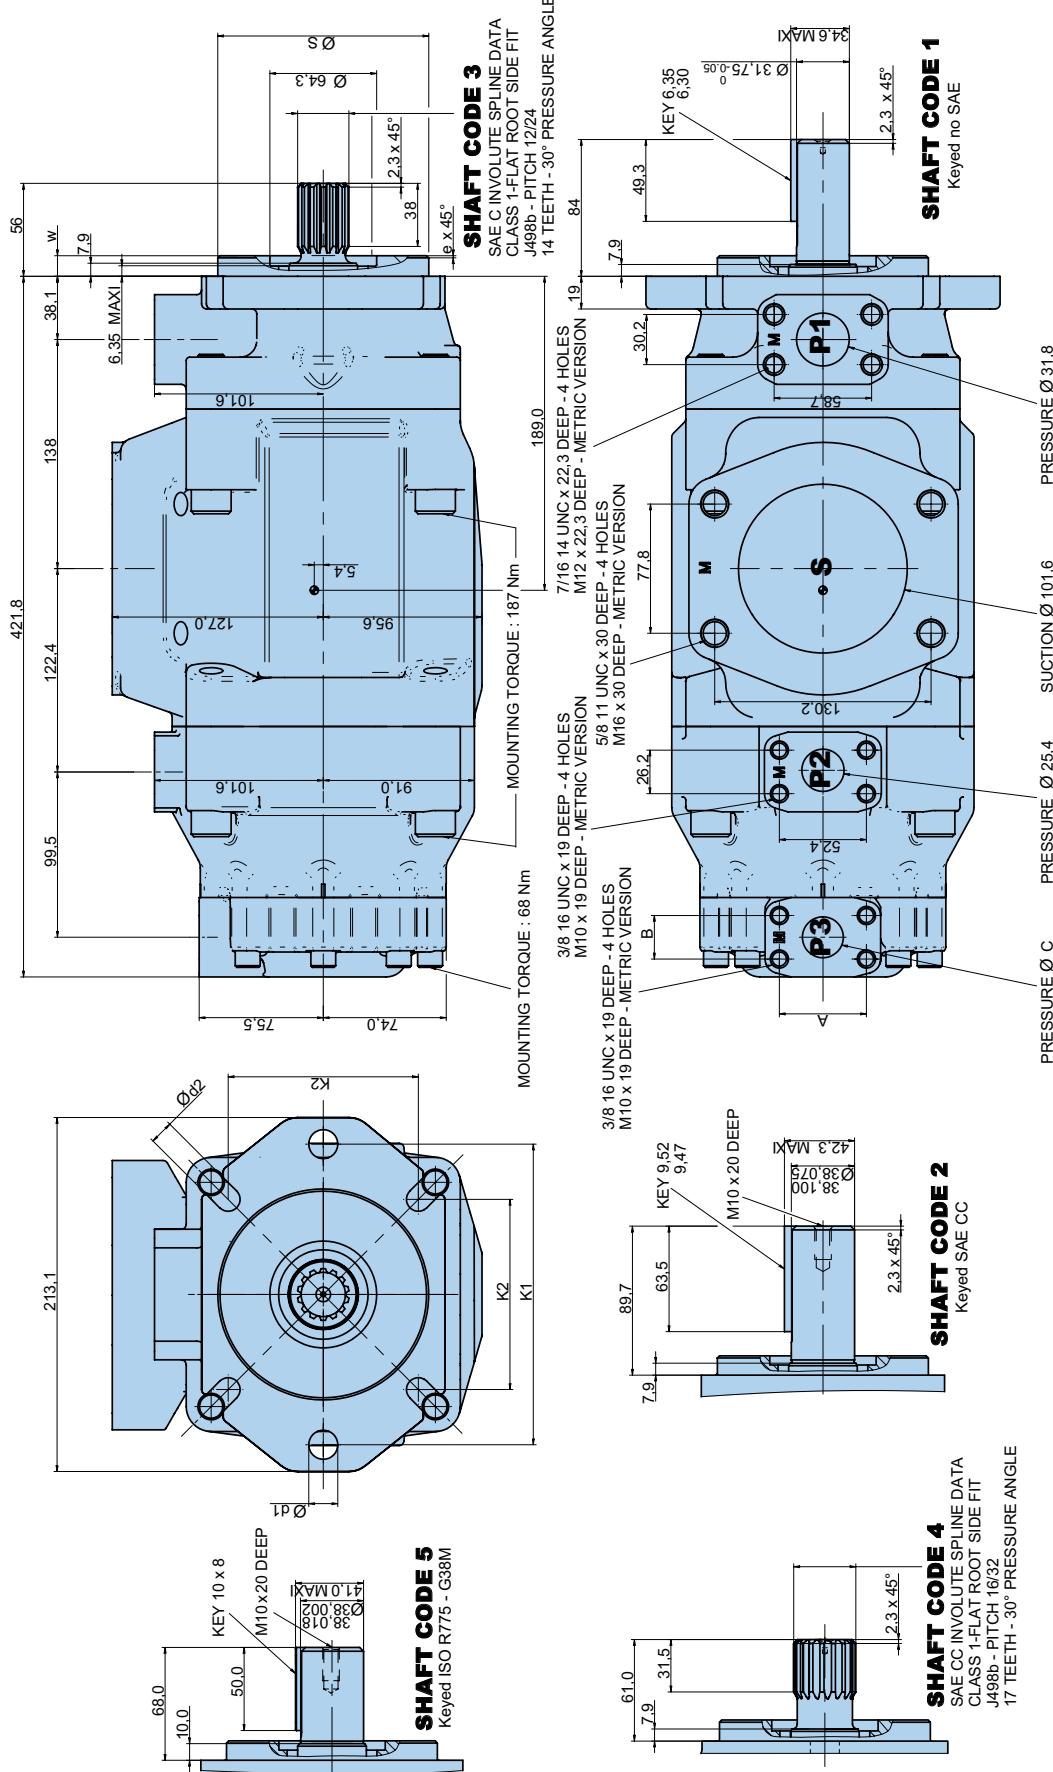

Alternate connect. variables			
Ø0 & M0 01 & M1			

Alternate mounting flange			
Series	Dia S	W	K1
T7DBB - T7DCB - T7DCC	Max. 125,000	124,937	2,0 9,5 180,0
T7DBBS - T7DCBS - T7DCCS	Min. 127,000	126,950	1,3 12,7 181,0 17,5 114,50 14,3

Shaft	V1 x p max. P1 + P2 + P3	Shaft	V1 x p min. P1 + P2 + P3
1	43240	4	83400
2	71750	5	56500
3	61200		

Model No. T7DCB or T7DCBS - B38 - 028 - B08 - 1 R 00 - A 1 - M1 - ..

T7DCB series - ISO 6 bolts 3019-2
mounting flange 125-A2-HW or 125-B4-HW

P1

P2

P3

T7DCBS series - SAE C 6 bolts
J744 mounting flange

Displacement for "P1"

Volumetric displacement (ml/rev)

B14 = 44,0	B24 = 81,1	B38 = 120,6
B17 = 55,0	B28 = 90,0	B42 = 137,5
B20 = 66,0	B31 = 99,2	045 = 145,7
B22 = 70,3	B35 = 113,4	050 = 158,0

Displacement for "P2"

Volumetric displacement (ml/rev)

003 = 10,8	012 = 37,1	022 = 70,3
005 = 17,2	014 = 46,0	025 = 79,3
006 = 21,3	017 = 58,3	028 = 88,8
008 = 26,4	020 = 63,8	031 = 100,0
010 = 34,1		

Displacement for "P3"

Volumetric displacement (ml/rev)

B02 = 5,8	B07 = 22,5	B12 = 41,0
B03 = 9,8	B08 = 24,9	B14 = 45,0
B04 = 12,8	B09 = 28,0	B15 = 50,0
B05 = 15,9	B10 = 31,8	
B06 = 19,8	B11 = 35,0	

Modifications**Mounting w/connection variables**

4 bolts SAE flange J518

P1 = 1.1/4 "	Metric thread	UNC thread
T7DCB-P3 = 3/4"	M1	
T7DCBS-P3 = 3/4"	M1	01
T7DCB-P3 = 1"	M0	
T7DCBS-P3 = 1"	M0	00

Seal class

1 = S1 BUNA N - 0,7 bar max. (for mineral oil)
4 = S4 EPDM - 7 bar max. (for fire resistant fluids)
5 = S5 VITON - 7 bar max. (for mineral oil and fire
resistant fluids)

Design letter

Porting combination (see pages 72 - 73)
00 = standard

Direction of rotation (shaft end view)

R = Clockwise L = Counter-clockwise

Type of shaft T7DCB & T7DCBS

5 = keyed (ISO 3019/2 - G38M)

Type of shaft T7DCBS

1 = keyed (non SAE)

2 = keyed (SAE CC)

3 = splined 12/24 (SAE C) (14 teeth)

4 = splined 12/24 (SAE CC) (17 teeth)


OPERATING CHARACTERISTICS - TYPICAL [24 cSt]

Pressure port	Series	Vi Volumetric displacement	Flow q _v [l/min] & n = 1500 RPM			Input power P [kW] & n = 1500 RPM		
			p = 0 bar	p = 140 bar	p = 250 bar	p = 7 bar	p = 140 bar	p = 250 bar
P1	B14	44,0 ml/rev	66,0	59,4	54,2	1,5	16,6	29,0
	B17	55,0 ml/rev	82,5	75,9	70,7	1,7	20,4	35,8
	B20	66,0 ml/rev	99,0	92,4	87,2	1,9	24,3	42,7
	B22	70,3 ml/rev	105,5	98,8	93,7	2,0	25,8	45,4
	B24	81,1 ml/rev	121,7	115,0	109,9	2,2	29,5	52,1
	B28	90,0 ml/rev	135,0	128,4	123,2	2,3	32,7	57,7
	B31	99,2 ml/rev	148,8	142,2	137,0	2,5	35,9	63,5
	B35	113,4 ml/rev	170,1	163,5	158,3	2,7	40,8	72,3
	B38	120,6 ml/rev	180,9	174,3	169,1	2,9	43,4	76,8
	B42	137,5 ml/rev	206,3	199,6	194,5	3,2	49,3	87,4
	045	145,7 ml/rev	218,6	209,2	202,6 ²⁾	4,1	52,8	89,5 ²⁾
	050	158,0 ml/rev	237,0	227,7	223,0 ¹⁾	4,4	57,1	85,0 ¹⁾
P2		p = 0 bar	p = 140 bar	p = 275 bar	p = 7 bar	p = 140 bar	p = 275 bar	*
	003	10,8 ml/rev	16,2	11,2	*	1,3	5,3	*
	005	17,2 ml/rev	25,8	20,8	16,1	1,4	7,5	13,9
	006	21,3 ml/rev	31,9	26,9	22,2	1,5	8,9	16,8
	008	26,4 ml/rev	39,6	34,6	29,9	1,6	10,7	20,3
	010	34,1 ml/rev	51,1	46,1	41,4	1,7	13,4	25,6
	012	37,1 ml/rev	55,6	50,6	45,9	1,7	14,4	27,6
	014	46,0 ml/rev	69,0	64,0	59,3	1,9	17,6	33,7
	017	58,3 ml/rev	87,4	82,4	77,7	2,1	21,9	42,2
	020	63,8 ml/rev	95,7	90,7	86,0	2,2	23,8	46,0
	022	70,3 ml/rev	105,4	100,4	95,7	2,3	26,1	50,4
	025	79,3 ml/rev	118,9	113,9	109,2	2,5	29,2	56,6
	028	88,8 ml/rev	133,2	128,2	125,8 ¹⁾	2,8	32,7	48,5 ¹⁾
	031	100,0 ml/rev	150,0	145,0	142,6 ¹⁾	2,8	36,5	54,4 ¹⁾
P3		p = 0 bar	p = 140 bar	p = 300 bar	p = 7 bar	p = 140 bar	p = 300 bar	*
	B02	5,8 ml/rev	8,7	7,0	5,1	0,5	2,6	5,1
	B03	9,8 ml/rev	14,7	13,0	11,1	0,6	4,0	8,1
	B04	12,8 ml/rev	19,2	17,5	15,6	0,6	5,0	10,4
	B05	15,9 ml/rev	23,9	22,2	20,2	0,7	6,1	12,7
	B06	19,8 ml/rev	29,7	28,0	26,1	0,7	7,5	15,6
	B07	22,5 ml/rev	33,7	32,0	30,2	0,8	8,5	17,6
	B08	24,9 ml/rev	37,4	35,7	33,7	0,8	9,3	19,5
	B09	28,0 ml/rev	42,0	40,3	38,4	0,9	10,4	21,8
	B10	31,8 ml/rev	47,7	46,0	44,1	0,9	11,7	26,2
	B11	35,0 ml/rev	52,5	50,8	48,9	1,0	12,8	27,0
	B12	41,0 ml/rev	61,5	59,8	57,9	1,1	14,9	31,5
	B14	45,0 ml/rev	67,5	65,8	63,9	1,2	16,3	34,5
	B15	50,0 ml/rev	75,0	73,3	71,6 ³⁾	1,3	18,1	35,7 ³⁾


* We do not recommend to use the size 003 in P2 at 275 bar & 1500 RPM as the internal leakage is over 50% of theoretical flow.

¹⁾ 050 - 028 - 031 = 210 bar max. int. ²⁾ 045 = 240 bar max. int. ³⁾ B15 = 280 bar max. int.

INTERNAL LEAKAGE (TYPICAL)

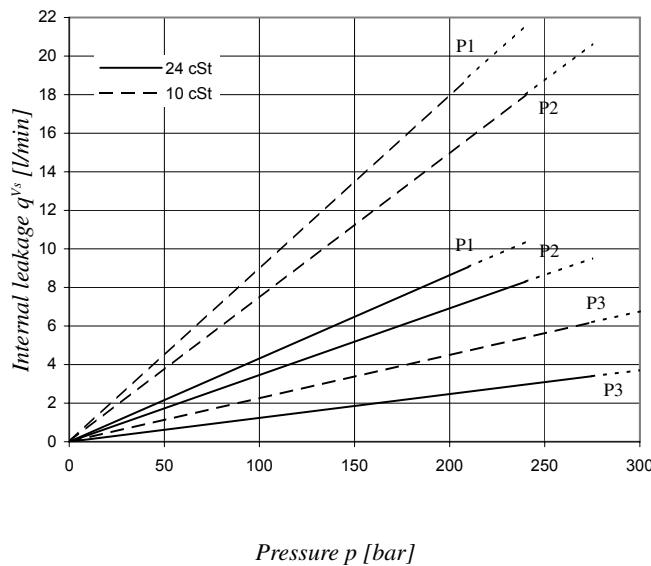

NOISE LEVEL (TYPICAL) - T7DCB - B38 - 022 - B10

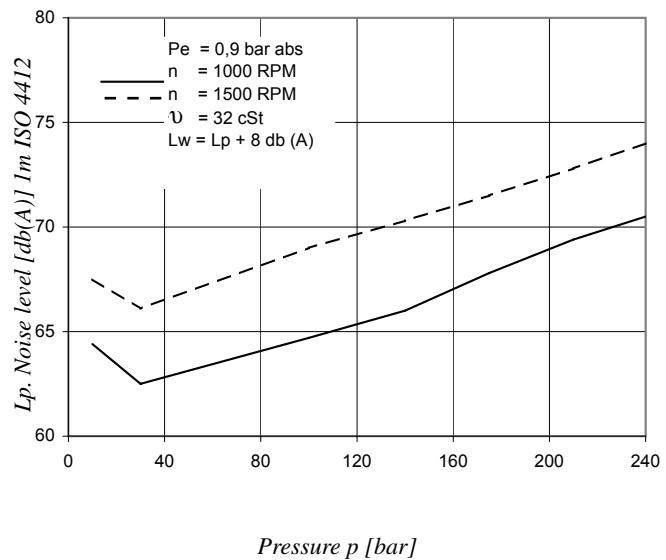


Do not operate pump more than 5 seconds at any speed or viscosity if internal leakage is higher than 50% of theoretical flow.


Total leakage is the sum of each section loss under its respective operating conditions.

Triple pump noise level is given with all stages discharging at the pressure value indicated on the curve.

POWER LOSS HYDROMECHANICAL (TYPICAL)

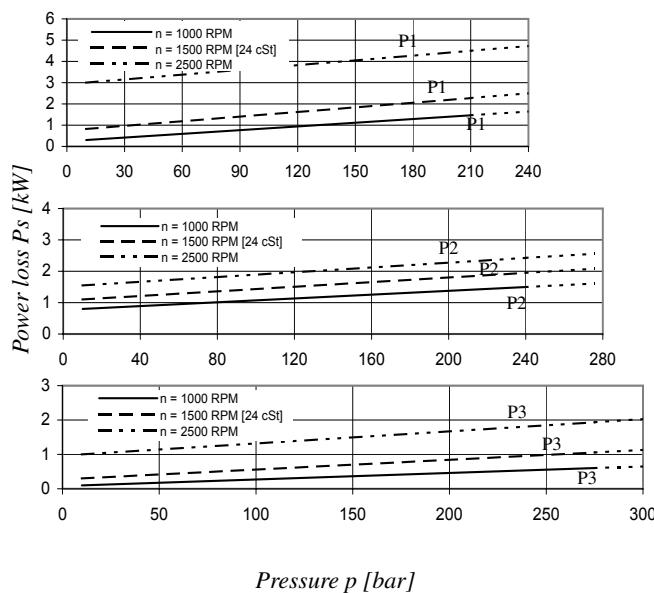


PERMISSIBLE RADIAL LOAD

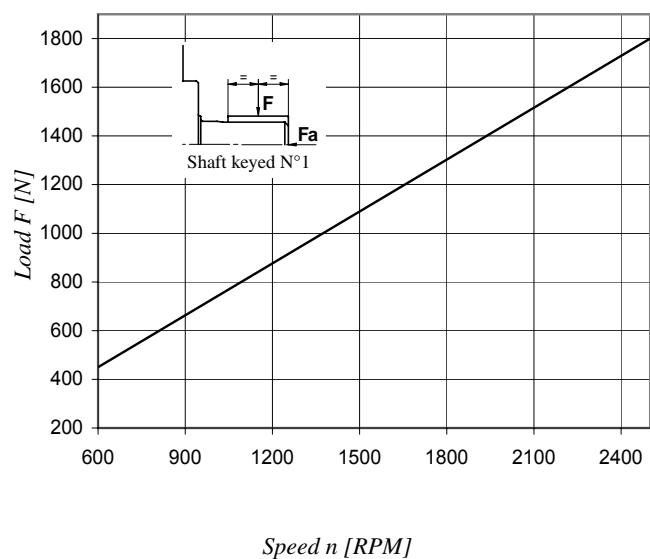


Total hydromechanical power loss is the sum of each section loss under its respective operating conditions.

Maximum permissible axial load $F_a = 800 \text{ N}$

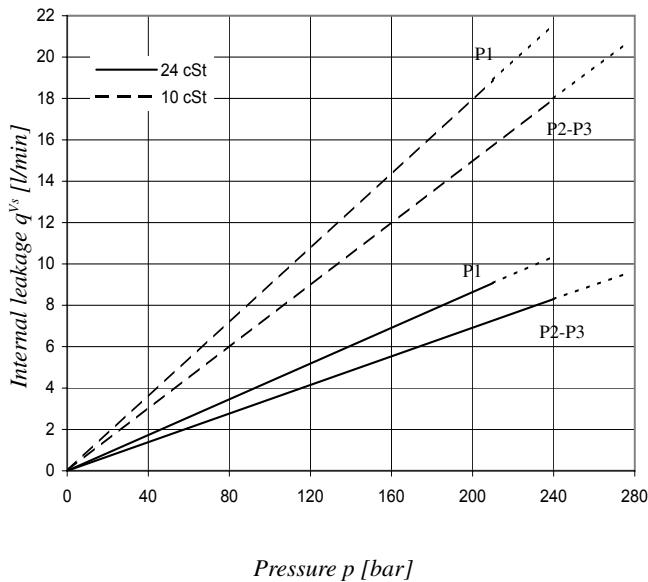
INTERNAL LEAKAGE (TYPICAL)

Do not operate pump more than 5 seconds at any speed or viscosity if internal leakage is higher than 50% of theoretical flow.


Total leakage is the sum of each section loss under its respective operating conditions.

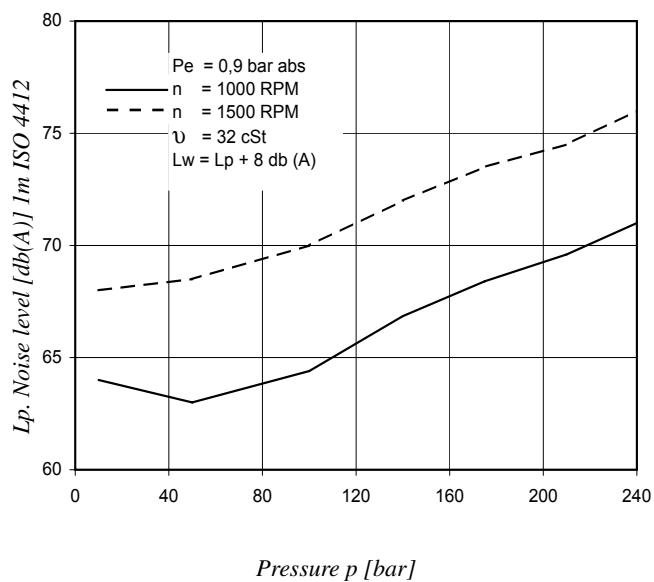NOISE LEVEL (TYPICAL) - T7DCC - B31 - 022 - 022

Triple pump noise level is given with all stages discharging at the pressure value indicated on the curve.

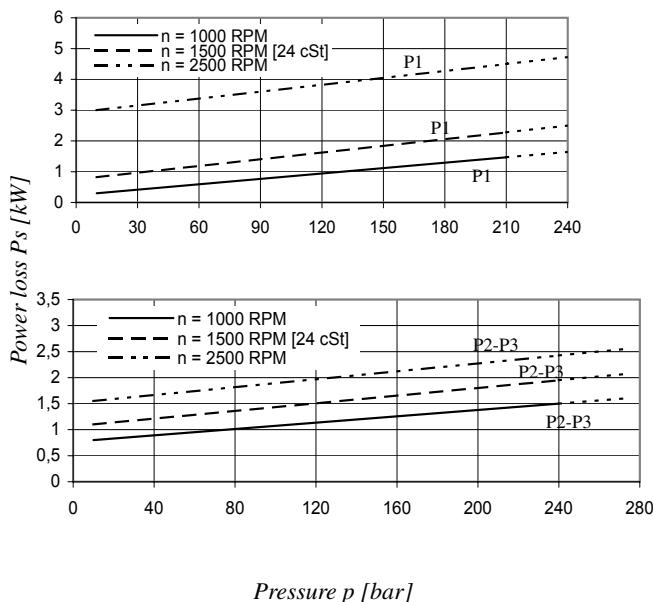POWER LOSS HYDROMECHANICAL (TYPICAL)

Total hydromechanical power loss is the sum of each section loss under its respective operating conditions.

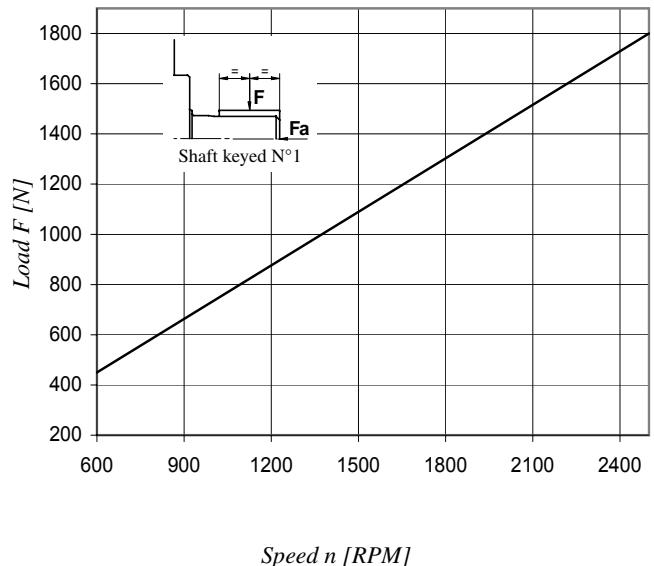PERMISSIBLE RADIAL LOAD

Maximum permissible axial load $F_a = 1200 \text{ N}$

Model No.

T7DCC or T7DCCS - B38 - 028 - 010 - 5 R 00 - A 1 - M0 - ..

T7DCC series - ISO 6 bolts 3019-2

Mounting flange 125-A2-HW or 125-B4-HW

P1**P2****P3**

Modifications

T7DCCS series - SAE C 6 bolts

J744 mounting flange

Displacement for "P1"

Volumetric displacement (ml/rev)

B14 = 44,0	B31 = 99,2
B17 = 55,0	B35 = 113,4
B20 = 66,0	B38 = 120,6
B22 = 70,3	B42 = 137,5
B24 = 81,1	045 = 145,7
B28 = 90,0	050 = 158,0

Displacement for "P2" & P3

Volumetric displacement (ml/rev)

003 = 10,8	017 = 58,3
005 = 17,2	020 = 63,8
006 = 21,3	022 = 70,3
008 = 26,4	025 = 79,3
010 = 34,1	028 = 88,8
012 = 37,1	031 = 100,0
014 = 46,0	

Type of shaft T7DCCS

1 = keyed (non SAE)

2 = keyed (SAE CC)

3 = splined 12/24 (SAE C)

4 = splined 12/24 (SAE CC)

Type of shaft T7DCC & T7DCCS

5 = keyed (ISO 3019/2 - G38M)

Mounting w/connection variables

4 bolts SAE flange J518

P1 = 1.1/4" - P2 = 1" - S = 4"		
	Metric thread	UNC thread
T7DCC-P3 = 3/4"	M1	
T7DCCS-P3 = 3/4"	M1	01
T7DCC-P3 = 1"	M0	
T7DCCS-P3 = 1"	M0	00

Seal class

1 = S1 BUNA N - 0,7 bar max. (for mineral oil)

4 = S4 EPDM - 7 bar max. (for fire resistant fluids)

5 = S5 VITON® - 7 bar max. (for mineral oil and fire resistant fluids)

Design letter

Porting combination (see pages 72 - 73)

00 = standard

Direction of rotation (shaft end view)

R = Clockwise

L = Counter-clockwise

OPERATING CHARACTERISTICS - TYPICAL [24 cSt]

Pressure port	Series	Vi Volumetric displacement	Flow q_{v_e} [l/min] & n = 1500 RPM			Input power P [kW] & n = 1500 RPM		
			p = 0 bar	p = 140 bar	p = 250 bar	p = 7 bar	p = 140 bar	p = 250 bar
P1	B14	44,0 ml/rev	66,0	59,4	54,2	1,5	16,6	29,0
	B17	55,0 ml/rev	82,5	75,9	70,7	1,7	20,4	35,8
	B20	66,0 ml/rev	99,0	92,4	87,2	1,9	24,3	42,7
	B22	70,3 ml/rev	105,5	98,8	93,7	2,0	25,8	45,4
	B24	81,1 ml/rev	121,7	115,0	109,9	2,2	29,5	52,1
	B28	90,0 ml/rev	135,0	128,4	123,2	2,3	32,7	57,7
	B31	99,2 ml/rev	148,8	142,2	137,0	2,5	35,9	63,5
	B35	113,4 ml/rev	170,1	163,5	158,3	2,7	40,8	72,3
	B38	120,6 ml/rev	180,9	174,3	169,1	2,9	43,4	76,8
	B42	137,5 ml/rev	206,3	199,6	194,5	3,2	49,3	87,4
P2 & P3	003	10,8 ml/rev	16,2	11,2	*	1,3	5,3	*
	005	17,2 ml/rev	25,8	20,8	16,1	1,4	7,5	13,9
	006	21,3 ml/rev	31,9	26,9	22,2	1,5	8,9	16,8
	008	26,4 ml/rev	39,6	34,6	29,9	1,6	10,7	20,3
	010	34,1 ml/rev	51,1	46,1	41,4	1,7	13,4	25,6
	012	37,1 ml/rev	55,6	50,6	45,9	1,7	14,4	27,6
	014	46,0 ml/rev	69,0	64,0	59,3	1,9	17,6	33,7
	017	58,3 ml/rev	87,4	82,4	77,7	2,1	21,9	42,2
	020	63,8 ml/rev	95,7	90,7	86,0	2,2	23,8	46,0
	022	70,3 ml/rev	105,4	100,4	95,7	2,3	26,1	50,4
	025	79,3 ml/rev	118,9	113,9	109,2	2,5	29,2	56,6
	028	88,8 ml/rev	133,2	128,2	125,8 ²⁾	2,8	32,7	48,5 ²⁾
	031	100,0 ml/rev	150,0	145,0	142,6 ²⁾	2,8	36,5	54,4 ²⁾

* We do not recommend to use the size 003 in P2 and P3 at 275 bar & 1500 RPM as the internal leakage is over 50% of theoretical flow.

¹⁾ 045 = 240 bar max. int. ²⁾ 050 - 028 - 031 = 210 bar max. int.

Model No.**T7DDB or T7DDBS - 050 - B22 - B12 - 1 R 00 - A 1 - M0 - ..****T7DDB series** - ISO 6 bolts 3019-2

Mounting flange 125-A2-HW or 125-B4-HW

P1**P2****P3****Modifications****Mounting w/connection variables**

4 bolts SAE flange J518

P1 & P2 = 1.1/4" - S = 4"		
	Metric thread	UNC thread
T7DDB-P3 = 1"	M0	
T7DDB-P3 = 3/4"	M1	
T7DDBS-P3 = 1"	M0	00
T7DDBS-P3 = 3/4"	M1	01

Seal class

1 = S1 BUNA N - 0,7 bar max. (for mineral oil)

4 = S4 EPDM - 7 bar max. (for fire resistant fluids)

5 = S5 VITON® - 7 bar max. (for mineral oil and fire
resistant fluids)**Design letter****Porting combination (see pages 72 - 73)**

00 = standard

Direction of rotation (shaft end view)

R = Clockwise

L = Counter-clockwise

Type of shaft T7DDBS

1 = keyed (SAE C)

2 = keyed (SAE CC)

3 = splined 12/24 (SAE C) (14 teeth)

4 = splined 12/24 (SAE CC) (17 teeth)

Type of shaft T7DDB & T7DBBS


5 = keyed (ISO 3019/2 - G38M)

OPERATING CHARACTERISTICS - TYPICAL [24 cSt]


Pressure port	Series	Vi Volumetric displacement	Flow q_{v_e} [l/min] & n = 1500 RPM			Input power P [kW] & n = 1500 RPM		
			p = 0 bar	p = 140 bar	p = 250 bar	p = 7 bar	p = 140 bar	p = 250 bar
P1 & P2	B14	44,0 ml/rev	66,0	59,4	54,2	1,5	16,6	29,0
	B17	55,0 ml/rev	82,5	75,9	70,7	1,7	20,4	35,8
	B20	66,0 ml/rev	99,0	92,4	87,2	1,9	24,3	42,7
	B22	70,3 ml/rev	105,5	98,8	93,7	2,0	25,8	45,4
	B24	81,1 ml/rev	121,7	115,0	109,9	2,2	29,5	52,1
	B28	90,0 ml/rev	135,0	128,4	123,2	2,3	32,7	57,7
	B31	99,2 ml/rev	148,8	142,2	137,0	2,5	35,9	63,5
	B35	113,4 ml/rev	170,1	163,5	158,3	2,7	40,8	72,3
	B38	120,6 ml/rev	180,9	174,3	169,1	2,9	43,4	76,8
	B42	137,5 ml/rev	206,3	199,6	194,5	3,2	49,3	87,4
P3	045	145,7 ml/rev	218,6	209,2	202,6 ¹⁾	4,1	52,8	89,5 ¹⁾
	050	158,0 ml/rev	237,0	227,7	223,0 ²⁾	4,4	57,1	85,0 ²⁾
			p = 0 bar	p = 140 bar	p = 300 bar	p = 7 bar	p = 140 bar	p = 300 bar
	B02	5,8 ml/rev	8,7	7,0	5,1	0,5	2,6	5,1
	B03	9,8 ml/rev	14,7	13,0	11,1	0,6	4,0	8,1
	B04	12,8 ml/rev	19,2	17,5	15,6	0,6	5,0	10,4
	B05	15,9 ml/rev	23,9	22,2	20,2	0,7	6,1	12,7
	B06	19,8 ml/rev	29,7	28,0	26,1	0,7	7,5	15,6
	B07	22,5 ml/rev	33,7	32,0	30,2	0,8	8,5	17,6
	B08	24,9 ml/rev	37,4	35,7	33,7	0,8	9,3	19,5
	B09	28,0 ml/rev	42,0	40,3	38,4	0,9	10,4	21,8
	B10	31,8 ml/rev	47,7	46,0	44,1	0,9	11,7	26,2
	B11	35,0 ml/rev	52,5	50,8	48,9	1,0	12,8	27,0
	B12	41,0 ml/rev	61,5	59,8	57,9	1,1	14,9	31,5
	B14	45,0 ml/rev	67,5	65,8	63,9	1,2	16,3	34,5
	B15	50,0 ml/rev	75,0	73,3	71,6 ³⁾	1,3	18,1	35,7 ³⁾

¹⁾ 045 = 240 bar max. int.²⁾ 050 = 210 bar max. int.³⁾ B15 = 280 bar max.int.

INTERNAL LEAKAGE (TYPICAL)

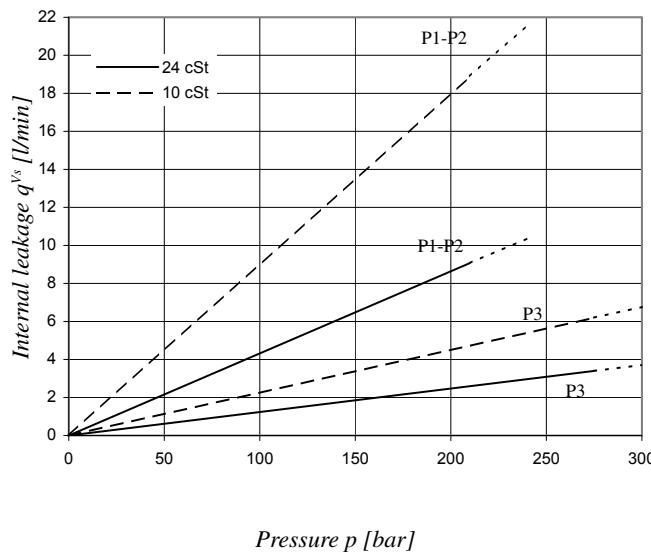

NOISE LEVEL (TYPICAL) - T7DDB - B31 - B31 - B10

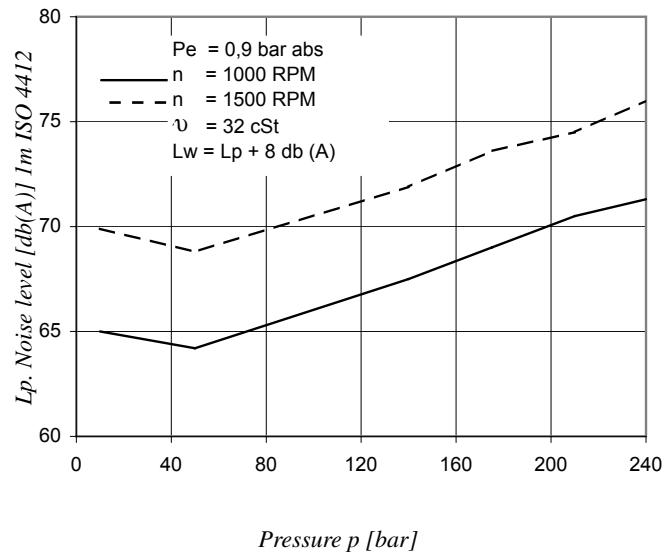


Do not operate pump more than 5 seconds at any speed or viscosity if internal leakage is higher than 50% of theoretical flow.


Total leakage is the sum of each section loss under its respective operating conditions.

Triple pump noise level is given with all stages discharging at the pressure value indicated on the curve.

POWER LOSS HYDROMECHANICAL (TYPICAL)


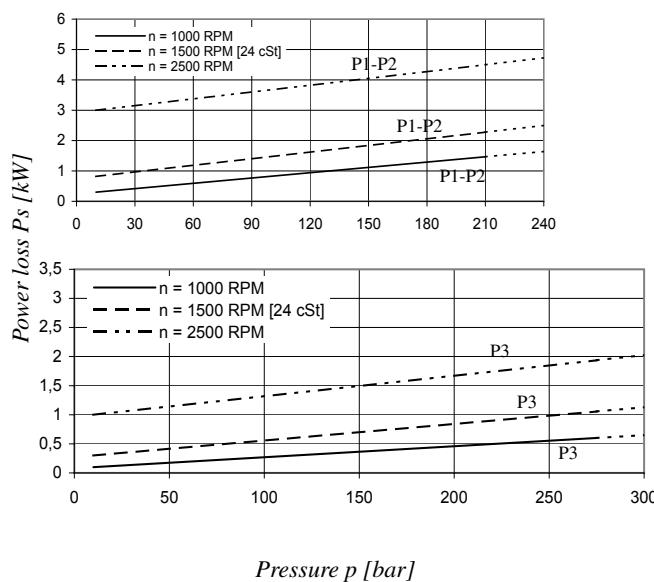


PERMISSIBLE RADIAL LOAD

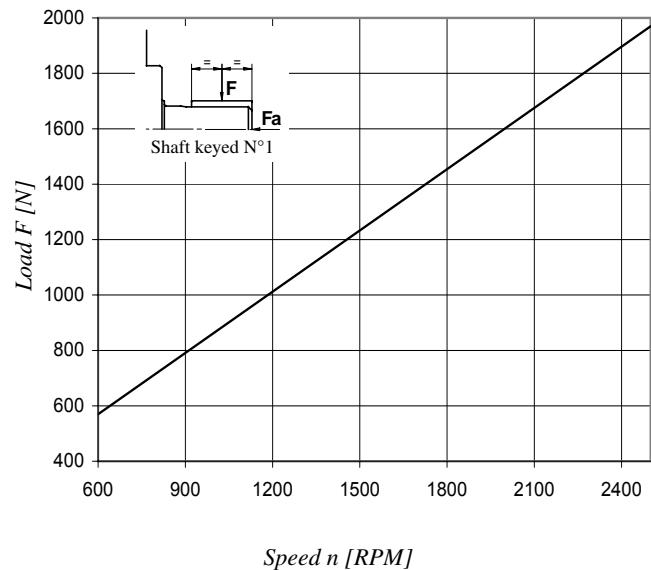

Total hydromechanical power loss is the sum of each section loss under its respective operating conditions.



Maximum permissible axial load $F_a = 1200 \text{ N}$

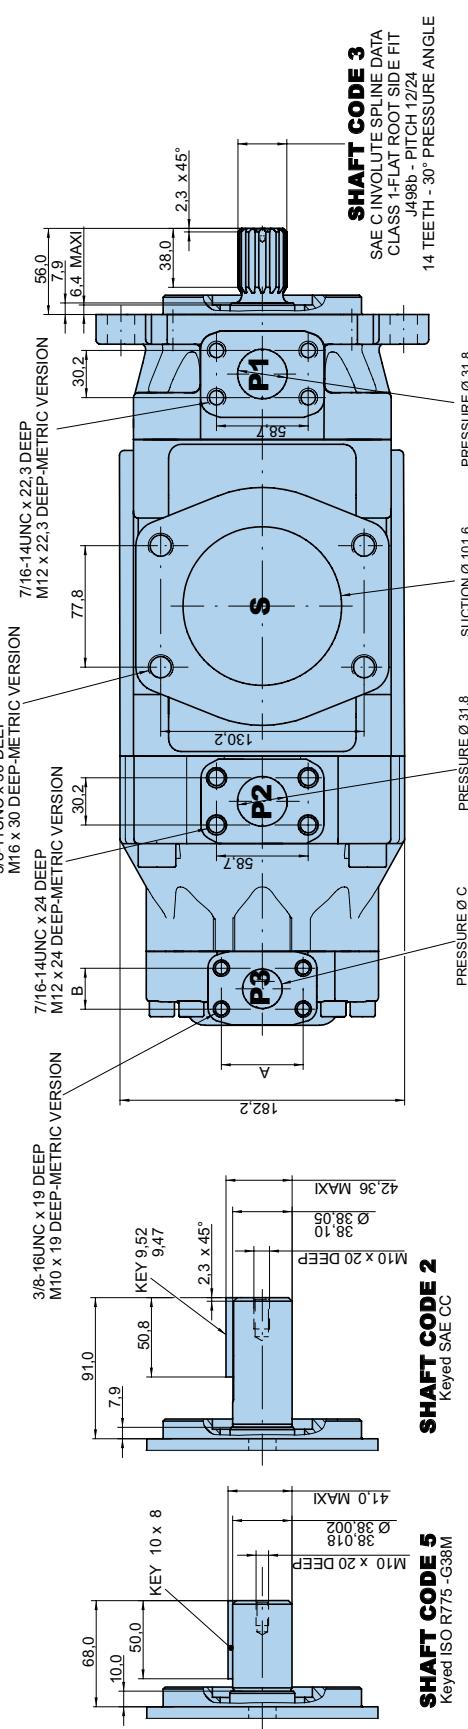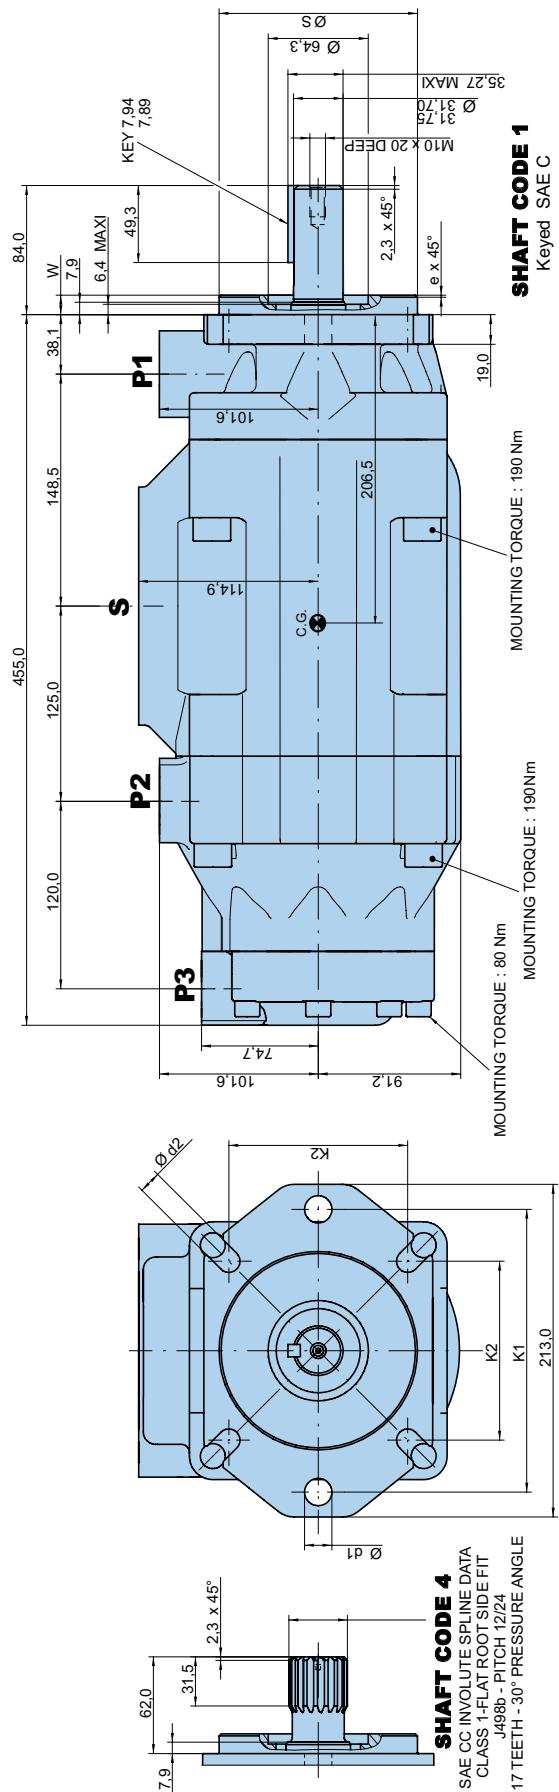

	Alternate connect. variables		
	00 & M0	01 & M1	
A	52,4	47,6	
B	26,2	22,2	
C	25,4	19,0	

Shaft torque limits [Nm/rev. x bar]			
Series	Dia S		Alternate mounting flange
T7DDB	Max.	e x 45°	
	Min.		
T7DDB	125,000	124,937	2,0
T7DDBS	127,000	126,950	1,5
			12,7
			181,0
			17,5
			114,50
			14,3

Shaft	Vi x p max. P1 + P2 + P3	Shaft	Vi x p max. P1 + P2 + P3
1	43,240	4	66,500
2	72,306	5	53,100
3	61,200		

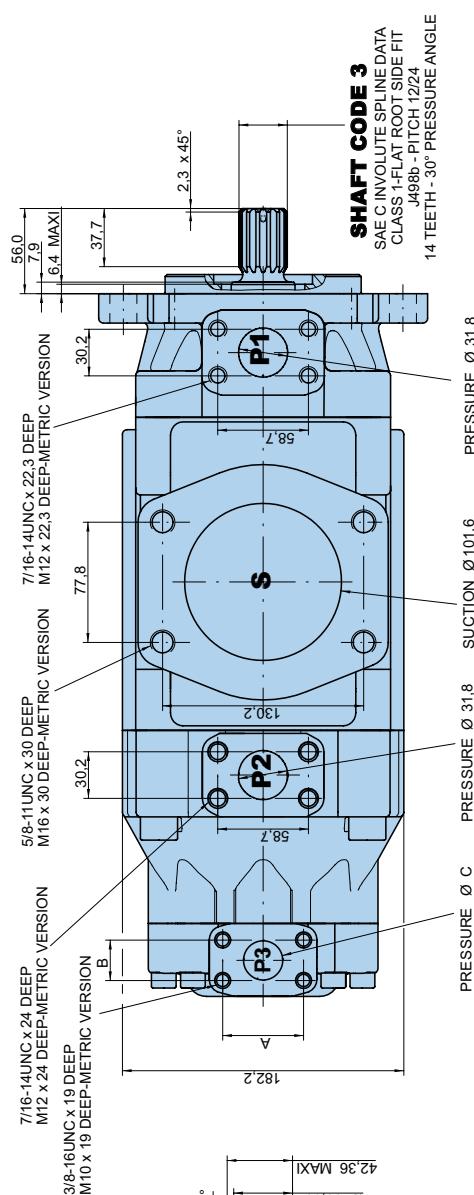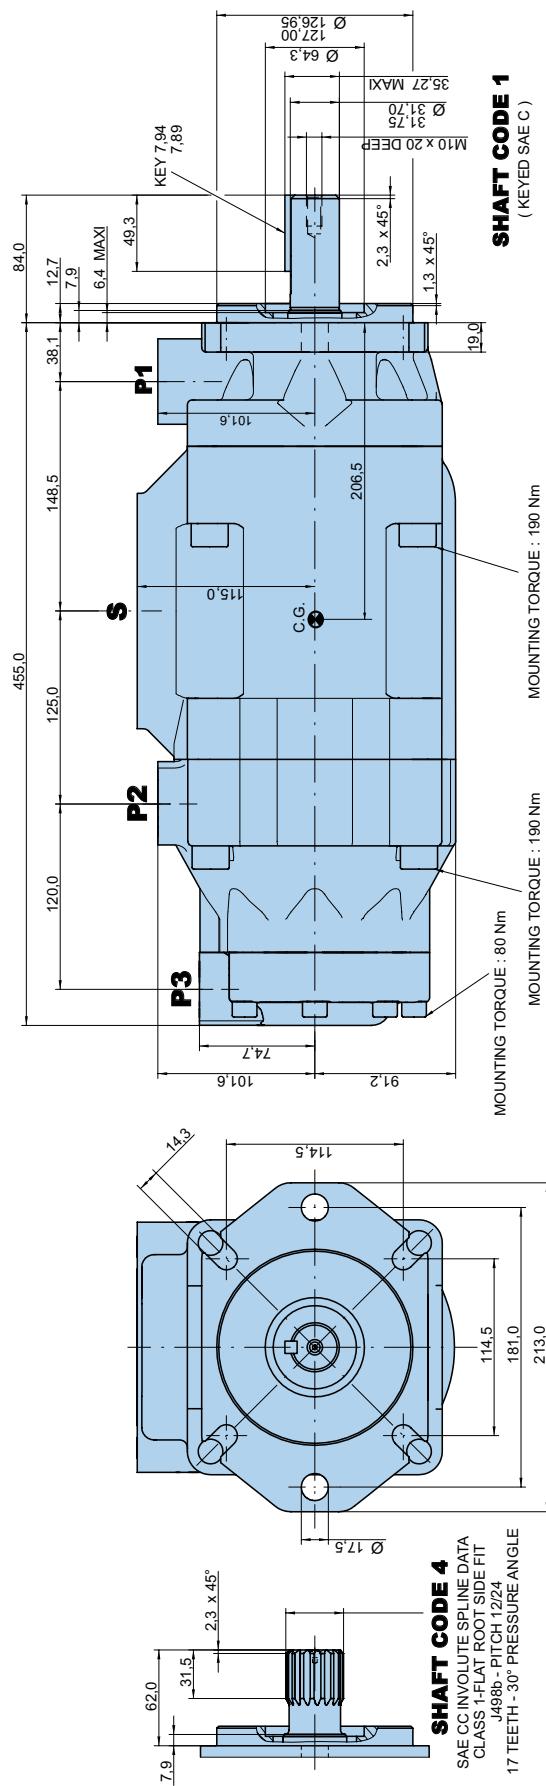

Alternate connect. variables	
	00 & M0 01 & M1
A	52,4 47,6
B	26,2 22,2
C	25,4 19,0

Shaft	V1 x p max. P1 + P2 + P3	Shaft	V1 x p max. P1 + P2 + P3
1	43240	4	66500
2	72306	5	55600
3	61200		

Model No.

T67DDCS - 050 - B35 - B08 - 1 R 00 - A 1 - M0 - ..

Series - SAE C 6 bolts

J744 mounting flange

P1 P2 P3

Modifications

Mounting w/connection variables

4 bolts SAE flange J518

P1 & P2 = 1.1/4" - S = 4"				
	Metric thread	UNC thread		
P3	1"	3/4"	1"	3/4"
Code	M0	M1	00	01

Seal class

- 1 = S1 BUNA N - 0,7 bar max. (for mineral oil)
 4 = S4 EPDM - 7 bar max. (for fire resistant fluids)
 5 = S5 VITON® - 7 bar max. (for mineral oil and fire
 resistant fluids)

Design letter

- Porting combination (see pages 72 - 73)
 00 = standard

- Direction of rotation (shaft end view)
 R = Clockwise
 L = Counter-clockwise

Displacement for "P1" & "P2"

Volumetric displacement (ml/rev)

B14 = 44,0	B31 = 99,2
B17 = 55,0	B35 = 113,4
B20 = 66,0	B38 = 120,6
B22 = 70,3	B42 = 137,5
B24 = 81,1	045 = 145,7
B28 = 90,0	050 = 158,0

Displacement for "P3"

Volumetric displacement (ml/rev)

003 = 10,8	017 = 58,3
005 = 17,2	020 = 63,8
006 = 21,3	022 = 70,3
008 = 26,4	025 = 79,3
010 = 34,1	028 = 88,8
012 = 37,1	031 = 100,0
014 = 46,0	

Type of shaft

- 1 = keyed (SAE C)
 2 = keyed (SAE CC)
 3 = splined 12/24 (SAE C) (14 teeth)
 4 = splined 12/24 (SAE CC) (17 teeth)
 5 = keyed (non SAE)

OPERATING CHARACTERISTICS - TYPICAL [24 cSt]


Pressure port	Series	Vi Volumetric displacement	Flow q _{Vi} [l/min] & n = 1500 RPM			Input power P [kW] & n = 1500 RPM		
			p = 0 bar	p = 140 bar	p = 250 bar	p = 7 bar	p = 140 bar	p = 250 bar
P1 & P2	B14	44,0 ml/rev	66,0	59,4	54,2	1,5	16,6	29,0
	B17	55,0 ml/rev	82,5	75,9	70,7	1,7	20,4	35,8
	B20	66,0 ml/rev	99,0	92,4	87,2	1,9	24,3	42,7
	B22	70,3 ml/rev	105,5	98,8	93,7	2,0	25,8	45,4
	B24	81,1 ml/rev	121,7	115,0	109,9	2,2	29,5	52,1
	B28	90,0 ml/rev	135,0	128,4	123,2	2,3	32,7	57,7
	B31	99,2 ml/rev	148,8	142,2	137,0	2,5	35,9	63,5
	B35	113,4 ml/rev	170,1	163,5	158,3	2,7	40,8	72,3
	B38	120,6 ml/rev	180,9	174,3	169,1	2,9	43,4	76,8
	B42	137,5 ml/rev	206,3	199,6	194,5	3,2	49,3	87,4
P3	045	145,7 ml/rev	218,6	209,2	202,6 ¹⁾	4,1	52,8	89,5 ¹⁾
	050	158,0 ml/rev	237,0	227,7	223,0 ²⁾	4,4	57,1	85,0 ²⁾
			p = 0 bar	p = 140 bar	p = 275 bar	p = 7 bar	p = 140 bar	p = 275 bar
	003	10,8 ml/rev	16,2	11,2	*	1,3	5,3	*
	005	17,2 ml/rev	25,8	20,8	16,1	1,4	7,5	13,9
	006	21,3 ml/rev	31,9	26,9	22,2	1,5	8,9	16,8
	008	26,4 ml/rev	39,6	34,6	29,9	1,6	10,7	20,3
	010	34,1 ml/rev	51,1	46,1	41,4	1,7	13,4	25,6
	012	37,1 ml/rev	55,6	50,6	45,9	1,7	14,4	27,6
	014	46,0 ml/rev	69,0	64,0	59,3	1,9	17,6	33,7
	017	58,3 ml/rev	87,4	82,4	77,7	2,1	21,9	42,2
	020	63,8 ml/rev	95,7	90,7	86,0	2,2	23,8	46,0
	022	70,3 ml/rev	105,4	100,4	95,7	2,3	26,1	50,4
	025	79,3 ml/rev	118,9	113,9	109,2	2,5	29,2	56,6
	028	88,8 ml/rev	133,2	128,2	125,8 ²⁾	2,8	32,7	48,5 ²⁾
	031	100,4 ml/rev	150,0	145,0	142,6 ²⁾	2,8	36,5	54,4 ²⁾

* We do not recommend to use the size 003 in P3 at 275 bar & 1500 RPM as the internal leakage is over 50% of theoretical flow.


1) 045 = 240 bar max. int. 2) 050 - 028 - 031 = 210 bar max. int.



INTERNAL LEAKAGE (TYPICAL)

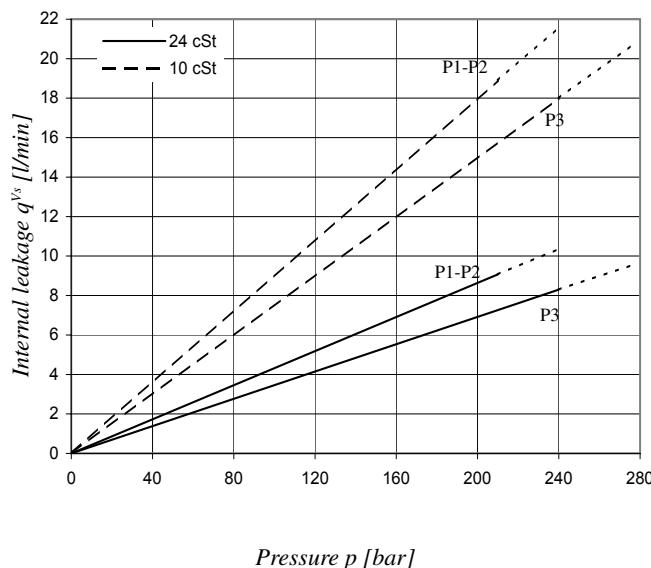

NOISE LEVEL (TYPICAL) - T67DDCS - B31 - B31 - 022

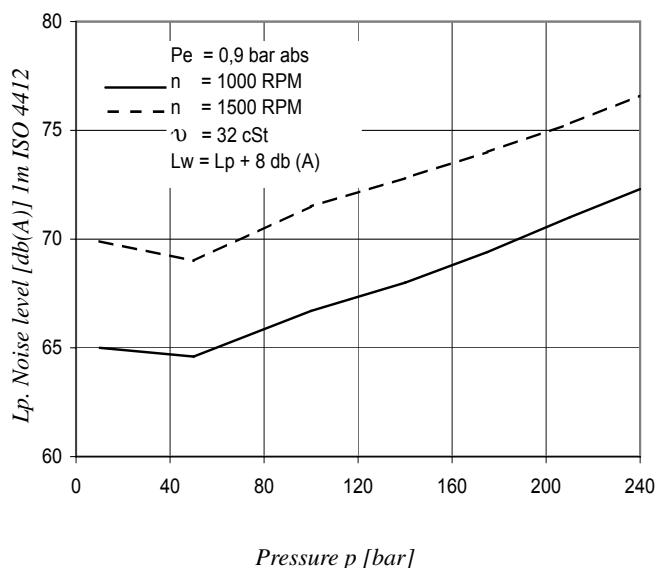


Do not operate pump more than 5 seconds at any speed or viscosity if internal leakage is higher than 50% of theoretical flow.


Total leakage is the sum of each section loss under its respective operating conditions.

Triple pump noise level is given with all stages discharging at the pressure value indicated on the curve.

POWER LOSS HYDROMECHANICAL (TYPICAL)

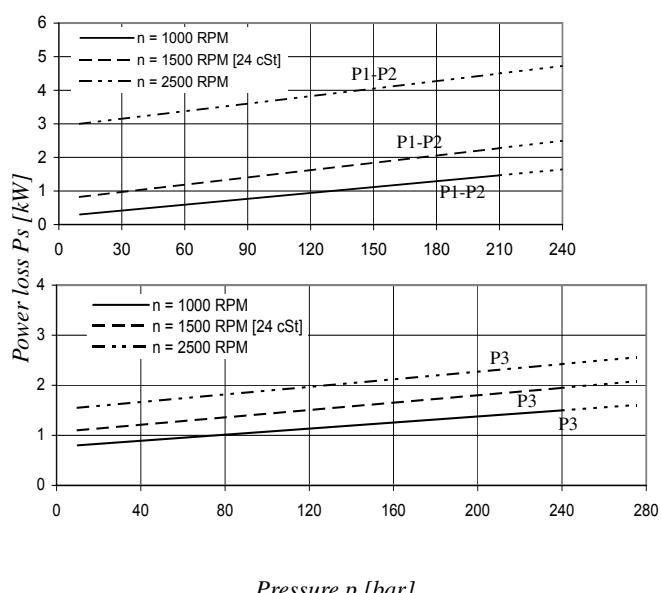


PERMISSIBLE RADIAL LOAD

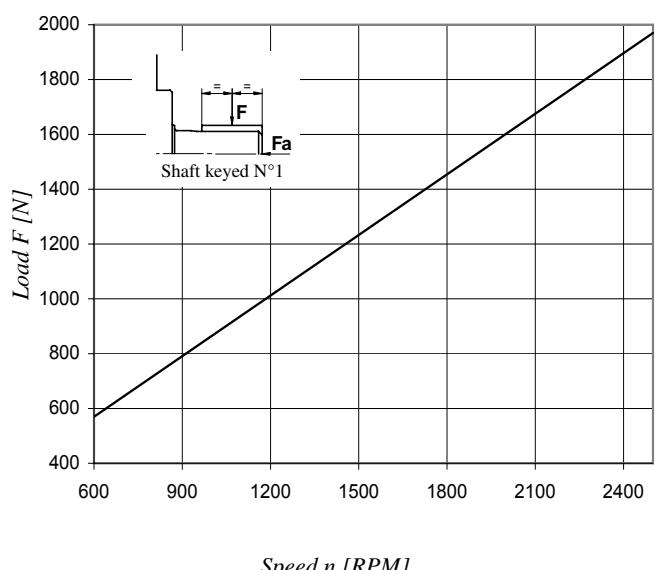


Total hydromechanical power loss is the sum of each section loss under its respective operating conditions.

Maximum permissible axial load $F_a = 1200 \text{ N}$

INTERNAL LEAKAGE (TYPICAL)

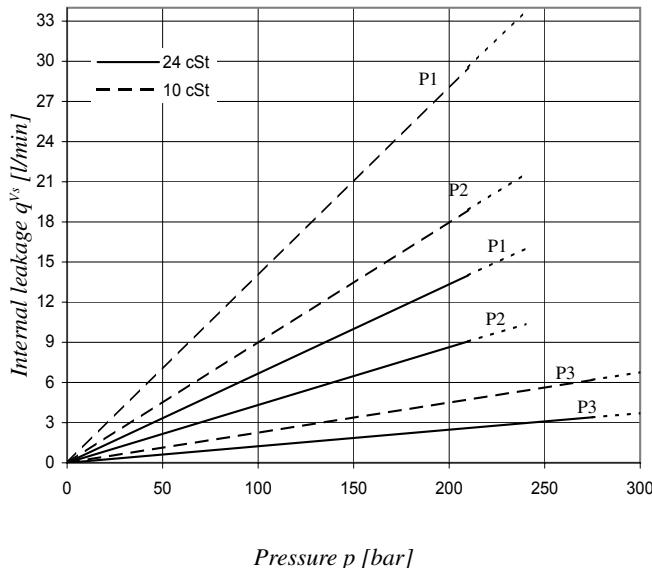


NOISE LEVEL (TYPICAL) - T7EDB - 062 - B35 - B04

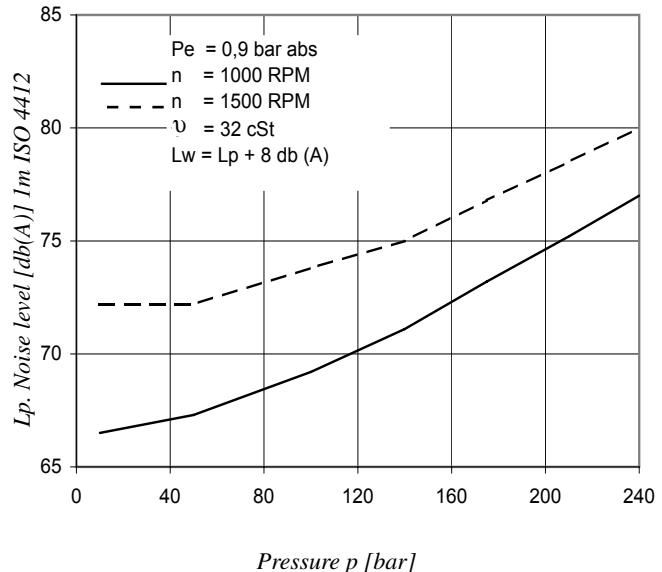


Do not operate pump more than 5 seconds at any speed or viscosity if internal leakage is higher than 50% of theoretical flow.
 Total leakage is the sum of each section loss under its respective operating conditions.

POWER LOSS HYDROMECHANICAL (TYPICAL)

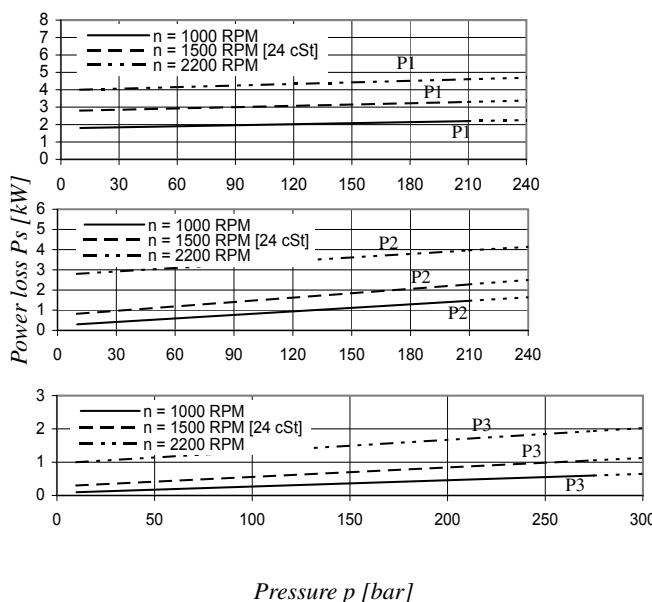

PERMISSIBLE RADIAL LOAD

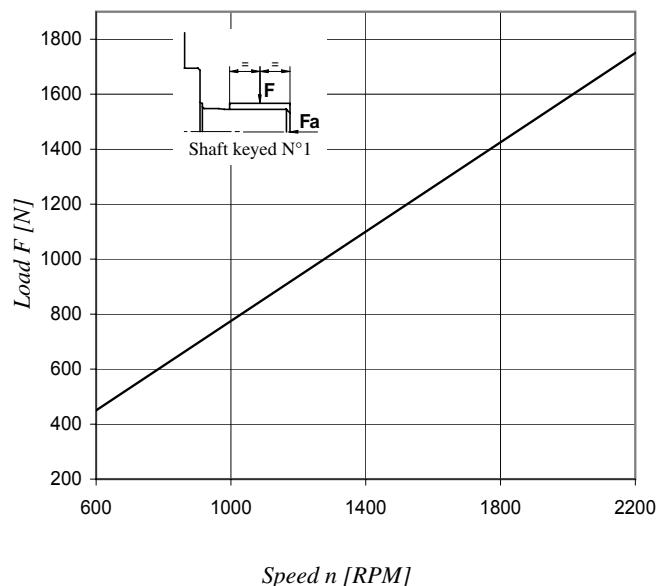

Total hydromechanical power loss is the sum of each section loss under its respective operating conditions.

Maximum permissible axial load $F_a = 2000 \text{ N}$

Model No.

T7EDB or T7EDBS - 062 - B35 - B10 - 1 R 00 - A 1 - 01 - ..

T7EDB series - ISO 4 bolts 3019-2

Mounting flange 250-B4-HW

T7EDBS series - SAE E 4 bolts

J744 mounting flange

P1

P2

P3

Modifications

Mounting w/connection variables

4 bolts SAE flange J518

P1 = 1.1/2"	P2 = 1.1/4"	S = 4"
Metric thread	UNC thread	
T7EDB-P3 = 1"	M0	
T7EDB-P3 = 3/4"	M1	
T7EDBS-P3 = 1"	M0	00
T7EDBS-P3 = 3/4"	M1	01

Seal class

1 = S1 BUNA N - 0,7 bar max. (for mineral oil)

4 = S4 EPDM - 7 bar max. (for fire resistant fluids)

5 = S5 VITON® - 7 bar max. (for mineral oil and fire resistant fluids)

Design letter

Porting combination (see pages 72 - 73)

00 = standard

Direction of rotation (shaft end view)

R = Clockwise L = Counter-clockwise

Type of shaft T7EDB

1 = keyed (ISO 3019/2 - G45N)

Type of shaft T7EDBS

2 = keyed (SAE D & E)

3 = splined 8/16 (SAE D & E) (13 teeth)

Displacement for "P1"

Volumetric displacement (ml/rev)		
042 = 132,3	054 = 171,0	066 = 213,3
045 = 142,4	057 = 183,3	072 = 227,1
050 = 158,5	062 = 196,7	085 = 268,7
052 = 164,8		

Displacement for "P2"

Volumetric displacement (ml/rev)		
B14 = 44,0	B24 = 81,1	B38 = 120,6
B17 = 55,0	B28 = 90,0	B42 = 137,5
B20 = 66,0	B31 = 99,2	B45 = 145,7
B22 = 70,3	B35 = 113,4	B50 = 158,0
B24 = 81,1		

Displacement for "P3"

Volumetric displacement (ml/rev)		
B02 = 5,8	B07 = 22,5	B11 = 35,0
B03 = 9,8	B08 = 24,9	B12 = 41,0
B04 = 12,8	B09 = 28,0	B14 = 45,0
B05 = 15,9	B10 = 31,8	B15 = 50,0
B06 = 19,8		


Type of shaft T7EDB



1 = keyed (ISO 3019/2 - G45N)

OPERATING CHARACTERISTICS - TYPICAL [24 cSt]

Pressure port	Series	Vi Volumetric displacement	Flow q _v [l/min] & n = 1500 RPM			Input power P [kW] & n = 1500 RPM		
			p = 0 bar	p = 140 bar	p = 240 bar	p = 7 bar	p = 140 bar	p = 240 bar
P1	042	132,3 ml/rev	198,5	188,5	181,3	5,2	49,4	82,6
	045	142,4 ml/rev	213,6	203,6	196,5	5,4	52,9	88,7
	050	158,5 ml/rev	237,7	227,7	220,6	5,7	58,5	98,3
	052	164,8 ml/rev	247,2	237,2	230,1	5,8	60,8	102,1
	054	171,0 ml/rev	256,5	246,5	239,4	5,9	63,0	105,8
	057	183,3 ml/rev	275,0	265,0	257,9	6,1	67,3	113,2
	062	196,7 ml/rev	295,0	285,0	277,9	6,4	71,9	121,3
	066	213,3 ml/rev	319,9	309,0	302,8	6,7	77,7	131,2
	072	227,1 ml/rev	340,6	330,6	323,5	6,9	82,6	139,5
	085	268,7 ml/rev	403,0	392,0 ¹⁾	-	9,1	65,8 ¹⁾	-
P2			p = 0 bar	p = 140 bar	p = 250 bar	p = 7 bar	p = 140 bar	p = 250 bar
	B14	44,0 ml/rev	66,0	59,4	54,2	1,5	16,6	29,0
	B17	55,0 ml/rev	82,5	75,9	70,7	1,7	20,4	35,8
	B20	66,0 ml/rev	99,0	92,4	87,2	1,9	24,3	42,7
	B22	70,3 ml/rev	105,5	98,8	93,7	2,0	25,8	45,4
	B24	81,1 ml/rev	121,7	115,0	109,9	2,2	29,5	52,1
	B28	90,0 ml/rev	135,0	128,4	123,2	2,3	32,7	57,7
	B31	99,2 ml/rev	148,8	142,2	137,0	2,5	35,9	63,5
	B35	113,4 ml/rev	170,1	163,5	158,3	2,7	40,8	72,3
	B38	120,6 ml/rev	180,9	174,3	169,1	2,9	43,4	76,8
	B42	137,5 ml/rev	206,3	199,6	194,5	3,2	49,3	87,4
P3	B45	145,7 ml/rev	218,6	209,2	202,6 ³⁾	4,1	52,8	89,5 ³⁾
	B50	158,0 ml/rev	237,0	227,7	223,0 ²⁾	4,4	57,1	85,0 ²⁾
			p = 0 bar	p = 140 bar	p = 300 bar	p = 7 bar	p = 140 bar	p = 300 bar
	B02	5,8 ml/rev	8,7	7,0	5,1	0,5	2,6	5,1
	B03	9,8 ml/rev	14,7	13,0	11,1	0,6	4,0	8,1
	B04	12,8 ml/rev	19,2	17,5	15,6	0,6	5,0	10,4
	B05	15,9 ml/rev	23,9	22,2	20,2	0,7	6,1	12,7
	B06	19,8 ml/rev	29,7	28,0	26,1	0,7	7,5	15,6
	B07	22,5 ml/rev	33,7	32,0	30,2	0,8	8,5	17,6
	B08	24,9 ml/rev	37,4	35,7	33,7	0,8	9,3	19,5
	B09	28,0 ml/rev	42,0	40,3	38,4	0,9	10,4	21,8
	B10	31,8 ml/rev	47,7	46,0	44,1	0,9	11,7	26,2
	B11	35,0 ml/rev	52,5	50,8	48,9	1,0	12,8	27,0
	B12	41,0 ml/rev	61,5	59,8	57,9	1,1	14,9	31,5
	B14	45,0 ml/rev	67,5	65,8	63,9	1,2	16,3	34,5
	B15	50,0 ml/rev	75,0	73,3	71,6 ⁴⁾	1,3	18,1	35,7 ⁴⁾

¹⁾ 085 = 90 bar max. int.²⁾ 050 = 210 bar max. int.³⁾ 045 = 240 bar max. int.⁴⁾ B15 = 280 bar max. int.

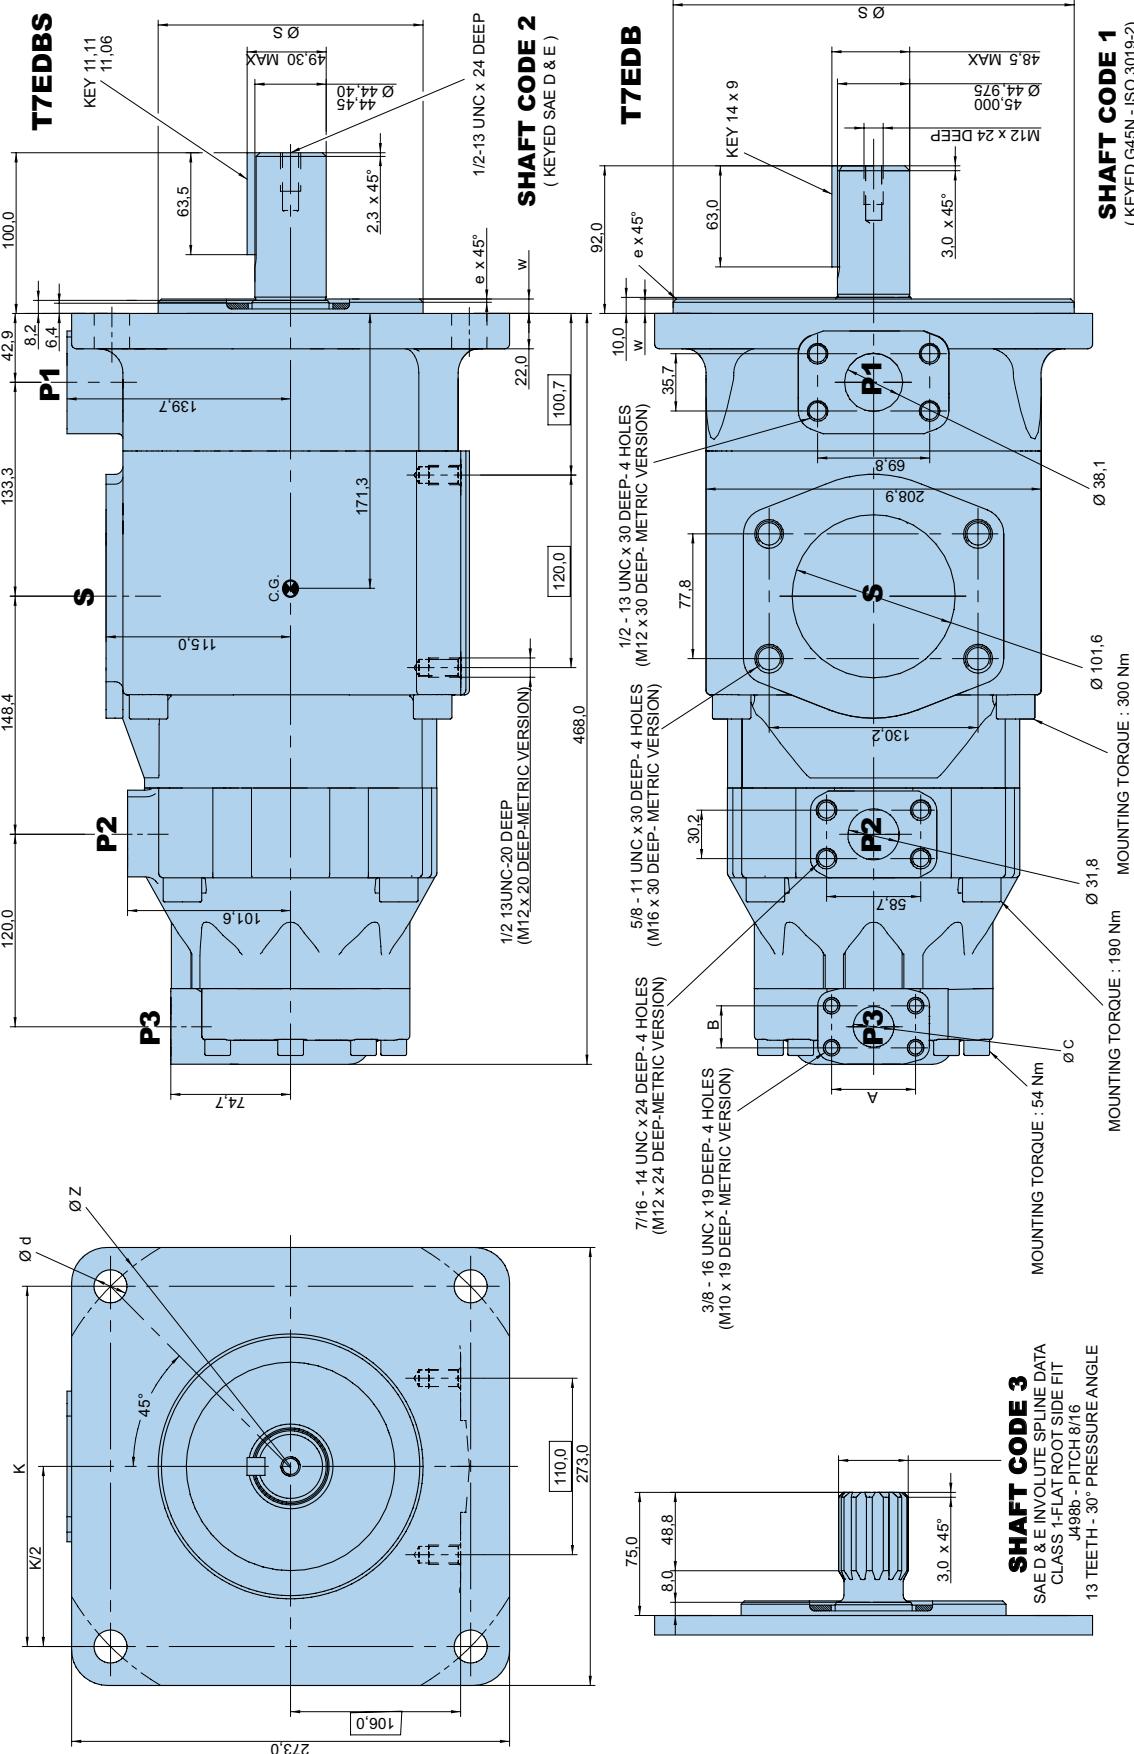

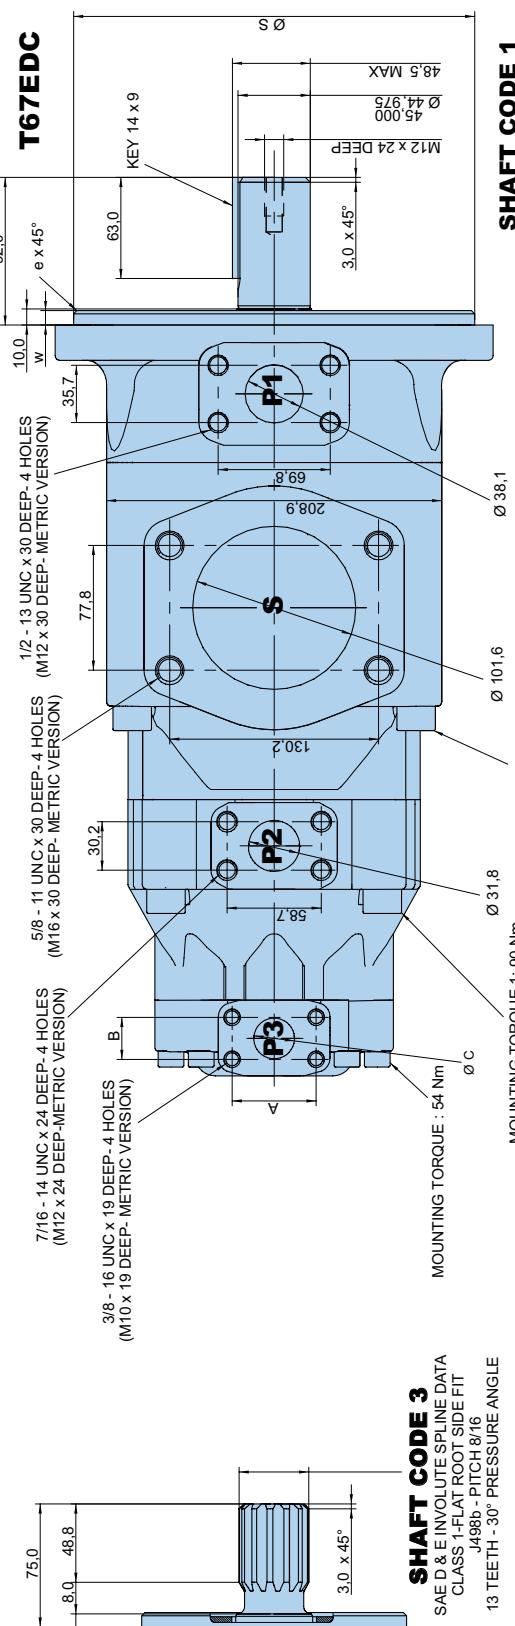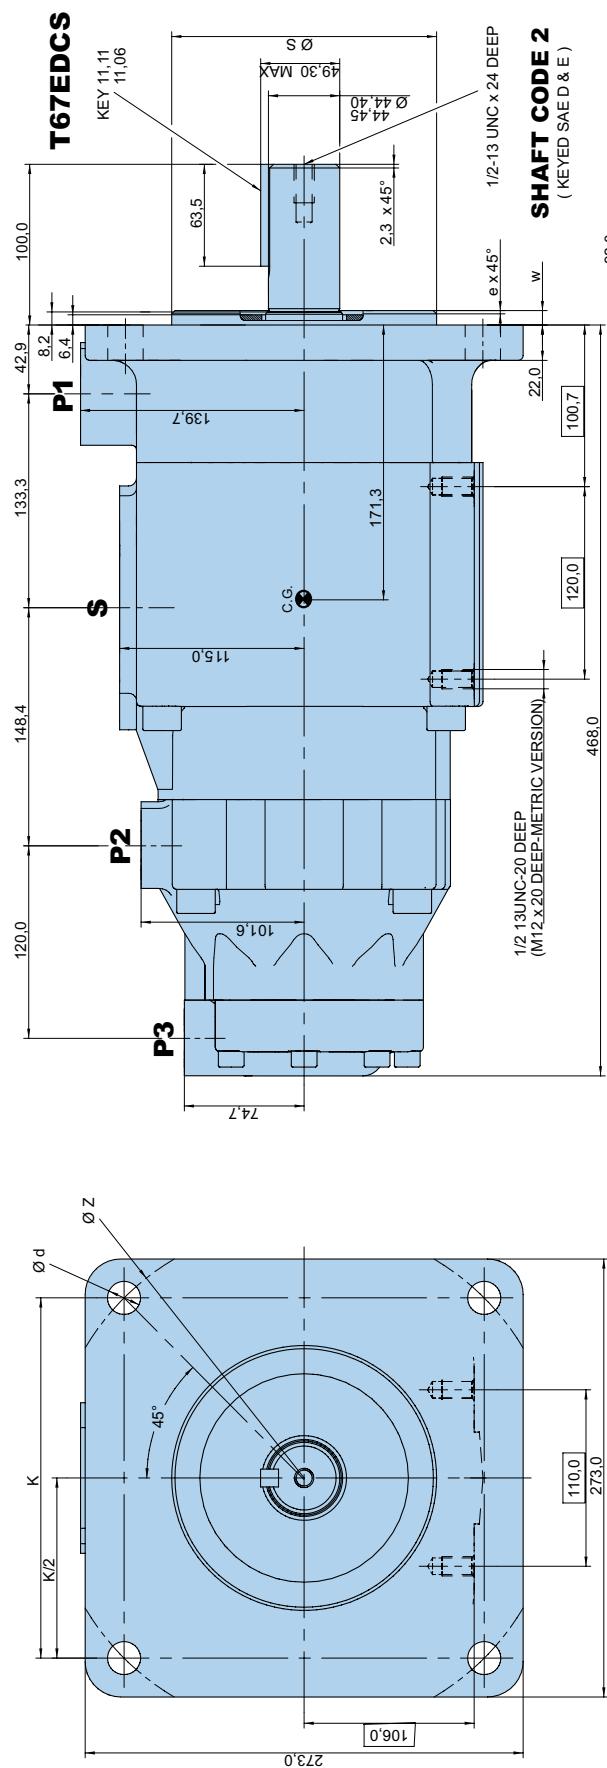

SH
SAE D &
CLASS
13 TEET

SHAFT CODE 3
SAE D & E INVOLUTE SPLINE DATA
CLASS 1-FLAT ROOT SIDE FIT
J498b - PITCH 8/16
13 TEE TEETH - 30° PRESSURE ANGLE

Shaft torque limits [ml/rev. x bar]		
Shaft	Vi x p max.	P1 + P2 + P3
1		114600
2		118340
3		124800

Alternate mounting flange

Alternate connect. variables			
	00	01	47,6
A	52,4	26,2	22,2
B	26,2	25,4	19,0
C	25,4	19,0	19,0

Model No. T67EDC or T67EDCS - 062 - B35 - 010 - 1 R 00 - A 1 - M1 - ..

T67EDC series - ISO 4 bolts 3019-2

Mounting flange 250-B4-HW

T67EDCS series - SAE E 4 bolts

J744 mounting flange

P1**P2****P3****Modifications****Mounting w/connection variables**

4 bolts SAE flange J518

P1 = 1.1/2" - P2 = 1.1/4" - S = 4"

	Metric thread	UNC thread
T67EDC-P3 = 1"	M0	
T67EDC-P3 = 3/4"	M1	
T67EDCS-P3 = 1"	M0	00
T67EDCS-P3 = 3/4"	M1	01

Seal class

1 = S1 BUNA N - 0,7 bar max. (for mineral oil)

4 = S4 EPDM - 7 bar max. (for fire resistant fluids)

5 = S5 VITON® - 7 bar max. (for mineral oil and fire
resistant fluids)**Design letter****Porting combination (see pages 72 - 73)**

00 = standard

Direction of rotation (shaft end view)

R = Clockwise L = Counter-clockwise

Type of shaft T67EDC _____ **Type of shaft T67EDCS**

1 = keyed (ISO 3019/2 - G45N)

2 = keyed (SAE D & E)

3 = splined 8/16 (SAE D & E) (13 teeth)

Displacement for "P1"

Volumetric displacement (ml/rev)

042 = 132,3 054 = 171,0 066 = 213,3

045 = 142,4 057 = 183,3 072 = 227,1

050 = 158,5 062 = 196,7 085 = 268,7

052 = 164,8

B14 = 44,0 B24 = 81,1 B38 = 120,6

B17 = 55,0 B28 = 90,0 B42 = 137,5

B20 = 66,0 B31 = 99,2 045 = 145,7

B22 = 70,3 B35 = 113,4 050 = 158,0

Displacement for "P2"

Volumetric displacement (ml/rev)

003 = 10,8 012 = 37,1 022 = 70,3

005 = 17,2 014 = 46,0 025 = 79,3

006 = 21,3 017 = 58,3 028 = 88,8

008 = 26,4 020 = 63,8 031 = 100,0

010 = 34,1

012 = 44,0 024 = 81,1 035 = 113,4

014 = 55,0 028 = 90,0 042 = 132,3

017 = 66,0 031 = 99,2 050 = 158,5

020 = 70,3 035 = 113,4 052 = 164,8

022 = 73,1 038 = 120,6 054 = 171,0

024 = 76,4 042 = 137,5 057 = 183,3

028 = 80,0 045 = 145,7 062 = 196,7

031 = 83,8 050 = 158,0 085 = 268,7

035 = 87,4 057 = 132,3 066 = 171,0

042 = 90,0 062 = 113,4 072 = 158,0

045 = 93,1 066 = 137,5 085 = 183,3

050 = 96,4 072 = 145,7 085 = 196,7

052 = 99,2 072 = 164,8 085 = 213,3

054 = 102,1 072 = 183,3 085 = 227,1

057 = 105,8 072 = 213,3 085 = 268,7

062 = 108,6 072 = 227,1 085 = 268,7

066 = 111,4 072 = 247,2 085 = 283,0²⁾072 = 114,2 072 = 247,2 085 = 283,0²⁾085 = 117,0 072 = 247,2 085 = 283,0²⁾

003 = 10,8 012 = 37,1 022 = 70,3

005 = 17,2 014 = 46,0 025 = 79,3

006 = 21,3 017 = 58,3 028 = 88,8

008 = 26,4 020 = 63,8 031 = 100,0

010 = 34,1 012 = 44,0 024 = 81,1

014 = 55,0 017 = 66,0 028 = 90,0

017 = 66,0 020 = 70,3 031 = 99,2

020 = 70,3 022 = 73,1 035 = 113,4

022 = 73,1 024 = 76,4 038 = 120,6

024 = 76,4 028 = 80,0 042 = 132,3

028 = 80,0 031 = 83,8 050 = 158,0

031 = 83,8 035 = 87,4 057 = 132,3

042 = 90,0 062 = 113,4 072 = 158,0

045 = 93,1 066 = 137,5 085 = 183,3

050 = 96,4 072 = 145,7 085 = 196,7

052 = 99,2 072 = 164,8 085 = 213,3

054 = 102,1 072 = 183,3 085 = 227,1

057 = 105,8 072 = 213,3 085 = 268,7

062 = 108,6 072 = 227,1 085 = 268,7

066 = 111,4 072 = 247,2 085 = 283,0²⁾072 = 114,2 072 = 247,2 085 = 283,0²⁾085 = 117,0 072 = 247,2 085 = 283,0²⁾

003 = 10,8 012 = 37,1 022 = 70,3

005 = 17,2 014 = 46,0 025 = 79,3

006 = 21,3 017 = 58,3 028 = 88,8

008 = 26,4 020 = 63,8 031 = 100,0

010 = 34,1 012 = 44,0 024 = 81,1

014 = 55,0 017 = 66,0 028 = 90,0

017 = 66,0 020 = 70,3 031 = 99,2

020 = 70,3 022 = 73,1 035 = 113,4

022 = 73,1 024 = 76,4 038 = 120,6

024 = 76,4 028 = 80,0 042 = 132,3

028 = 80,0 031 = 83,8 050 = 158,0

031 = 83,8 035 = 87,4 057 = 132,3

042 = 90,0 062 = 113,4 072 = 158,0

045 = 93,1 066 = 137,5 085 = 183,3

050 = 96,4 072 = 145,7 085 = 196,7

052 = 99,2 072 = 164,8 085 = 213,3

054 = 102,1 072 = 183,3 085 = 227,1

057 = 105,8 072 = 213,3 085 = 268,7

062 = 108,6 072 = 227,1 085 = 268,7

066 = 111,4 072 = 247,2 085 = 283,0²⁾072 = 114,2 072 = 247,2 085 = 283,0²⁾085 = 117,0 072 = 247,2 085 = 283,0²⁾

003 = 10,8 012 = 37,1 022 = 70,3

005 = 17,2 014 = 46,0 025 = 79,3

006 = 21,3 017 = 58,3 028 = 88,8

008 = 26,4 020 = 63,8 031 = 100,0

010 = 34,1 012 = 44,0 024 = 81,1

014 = 55,0 017 = 66,0 028 = 90,0

017 = 66,0 020 = 70,3 031 = 99,2

020 = 70,3 022 = 73,1 035 = 113,4

022 = 73,1 024 = 76,4 038 = 120,6

024 = 76,4 028 = 80,0 042 = 132,3

028 = 80,0 031 = 83,8 050 = 158,0

031 = 83,8 035 = 87,4 057 = 132,3

042 = 90,0 062 = 113,4 072 = 158,0

045 = 93,1 066 = 137,5 085 = 183,3

050 = 96,4 072 = 145,7 085 = 196,7

052 = 99,2 072 = 164,8 085 = 213,3

054 = 102,1 072 = 183,3 085 = 227,1

057 = 105,8 072 = 213,3 085 = 268,7

062 = 108,6 072 = 227,1 085 = 268,7

066 = 111,4 072 = 247,2 085 = 283,0²⁾072 = 114,2 072 = 247,2 085 = 283,0²⁾085 = 117,0 072 = 247,2 085 = 283,0²⁾

003 = 10,8 012 = 37,1 022 = 70,3

005 = 17,2 014 = 46,0 025 = 79,3

006 = 21,3 017 = 58,3 028 = 88,8

008 = 26,4 020 = 63,8 031 = 100,0

010 = 34,1 012 = 44,0 024 = 81,1

014 = 55,0 017 = 66,0 028 = 90,0

017 = 66,0 020 = 70,3 031 = 99,2

020 = 70,3 022 = 73,1 035 = 113,4

022 = 73,1 024 = 76,4 038 = 120,6

024 = 76,4 028 = 80,0 042 = 132,3

028 = 80,0 031 = 83,8 050 = 158,0

031 = 83,8 035 = 87,4 057 = 132,3

042 = 90,0 062 = 113,4 072 = 158,0

045 = 93,1 066 = 137,5 085 = 183,3

050 = 96,4 072 = 145,7 085 = 196,7

052 = 99,2 072 = 164,8 085 = 213,3

054 = 102,1 072 = 183,3 085 = 227,1

057 = 105,8 072 = 213,3 085 = 268,7

062 = 108,6 072 = 227,1 085 = 268,7

066 = 111,4 072 = 247,2 085 = 283,0²⁾072 = 114,2 072 = 247,2 085 = 283,0²⁾085 = 117,0 072 = 247,2 085 = 283,0²⁾

003 = 10,8 012 = 37,1 022 = 70,3

005 = 17,2 014 = 46,0 025 = 79,3

006 = 21,3 017 = 58,3 028 = 88,8

008 = 26,4 020 = 63,8 031 = 100,0

010 = 34,1 012 = 44,0 024 = 81,1

014 = 55,0 017 = 66,0 028 = 90,0

017 = 66,0 020 = 70,3 031 = 99,2

020 = 70,3 022 = 73,1 035 = 113,4

022 = 73,1 024 = 76,4 038 = 120,6

024 = 76,4 028 = 80,0 042 = 132,3

028 = 80,0 031 = 83,8 050 = 158,0

031 = 83,8 035 = 87,4 057 = 132,3

042 = 90,0 062 = 113,4 072 = 158,0

045 = 93,1 066 = 137,5 085 = 183,3

050 = 96,4 072 = 145,7 085 = 196,7

052 = 99,2 072 = 164,8 085 = 213,3

054 = 102,1 072 = 183,3 085 = 227,1

057 = 105,8 072 = 213,3 085 = 268,7

062 = 108,6 072 = 227,1 085 = 268,7

066 = 111,4 072 = 247,2 085 = 283,0²⁾072 = 114,2 072 = 247,2 085 = 283,0²⁾085 = 117,0 072 = 247,2 085 = 283,0²⁾

003 = 10,8 012 = 37,1 022 = 70,3

005 = 17,2 014 = 46,0 025 = 79,3

006 = 21,3 017 = 58,3 028 = 88,8

008 = 26,4 020 = 63,8 031 = 100,0

010 = 34,1 012 = 44,0 024 = 81,1

014 = 55,0 017 = 66,0 028 = 90,0

017 = 66,0 020 = 70,3 031 = 99,2

020 = 70,3 022 = 73,1 035 = 113,4

022 = 73,1 024 = 76,4 038 = 120,6

024 = 76,4 028 = 80,0 042 = 132,3

028 = 80,0 031 = 83,8 050 = 158,0


031 = 83,8 035 = 87,4 057 = 132,3

042 = 90,0 062 = 113,4 072 = 158,0


045 = 93,1 066 = 137,5 085 = 183,3

0

INTERNAL LEAKAGE (TYPICAL)

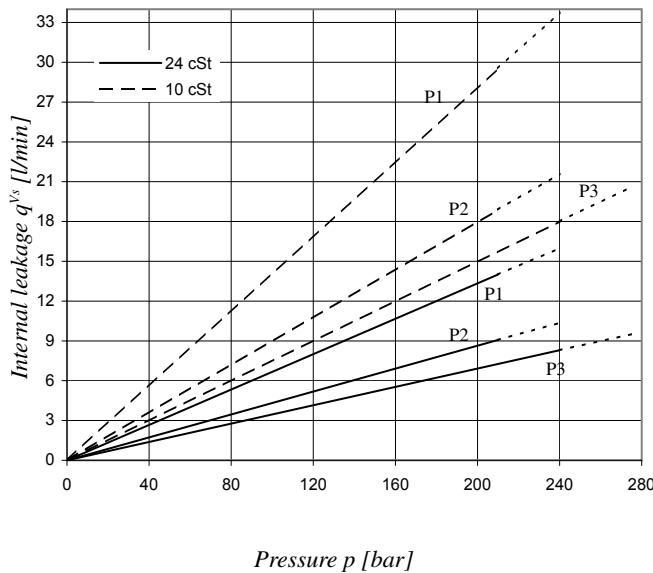

NOISE LEVEL (TYPICAL) - T67EDCS - 062 - B35 - 022

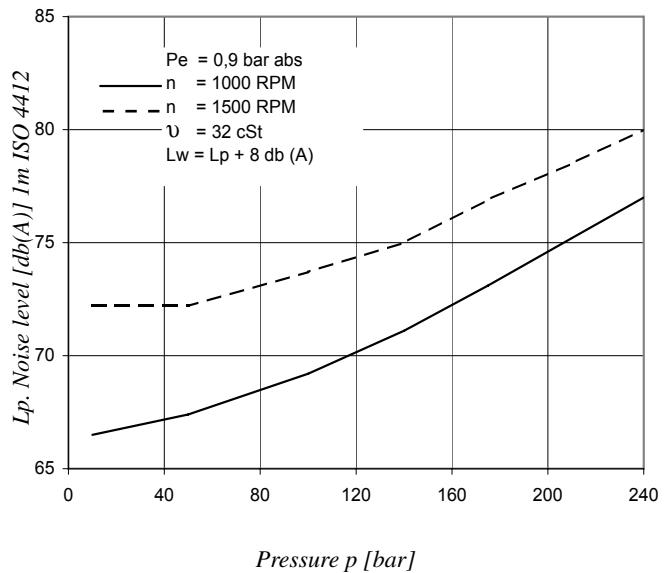


Do not operate pump more than 5 seconds at any speed or viscosity if internal leakage is higher than 50% of theoretical flow.


Total leakage is the sum of each section loss under its respective operating conditions.

Triple pump noise level is given with all stages discharging at the pressure value indicated on the curve.

POWER LOSS HYDROMECHANICAL (TYPICAL)


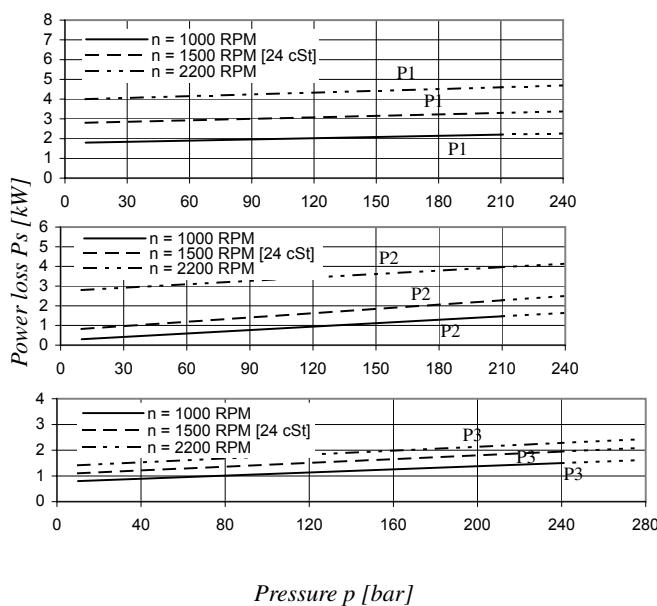


PERMISSIBLE RADIAL LOAD

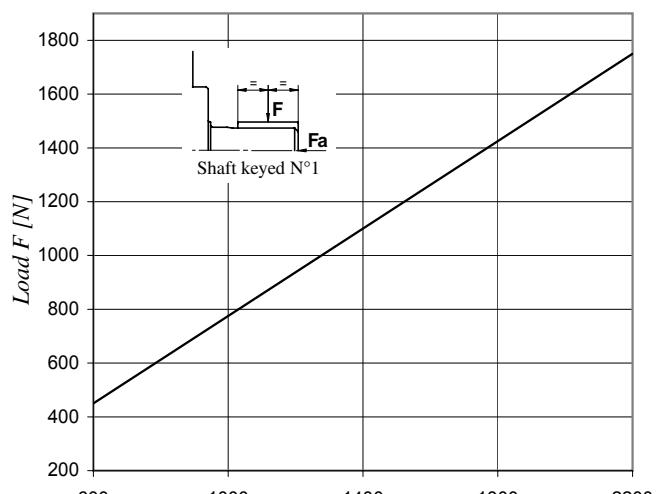

Total hydromechanical power loss is the sum of each section loss under its respective operating conditions.



Maximum permissible axial load $F_a = 2000 \text{ N}$

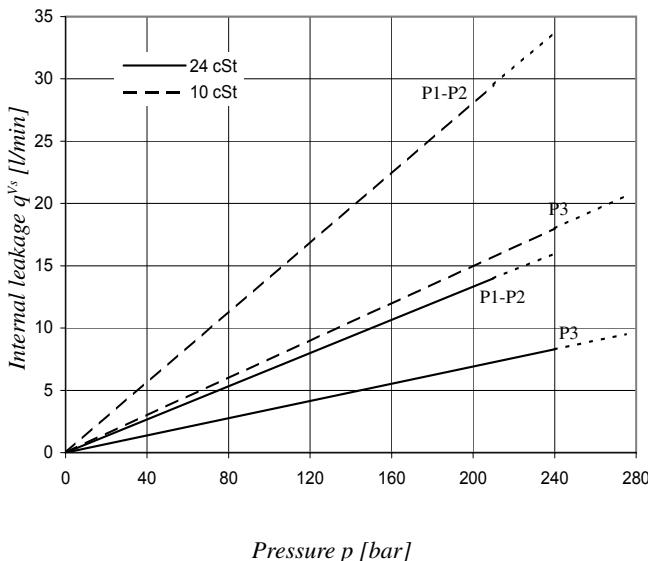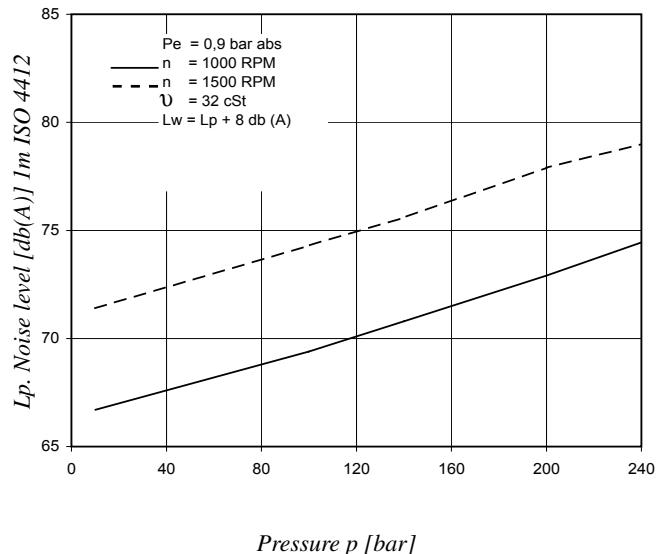INTERNAL LEAKAGE (TYPICAL)**NOISE LEVEL (TYPICAL) - T7EECS - 052 - 052 - 025**

Do not operate pump more than 5 seconds at any speed or viscosity if internal leakage is higher than 50% of theoretical flow.

Total leakage is the sum of each section loss under its respective operating conditions.

Triple pump noise level is given with all stages discharging at the pressure value indicated on the curve.

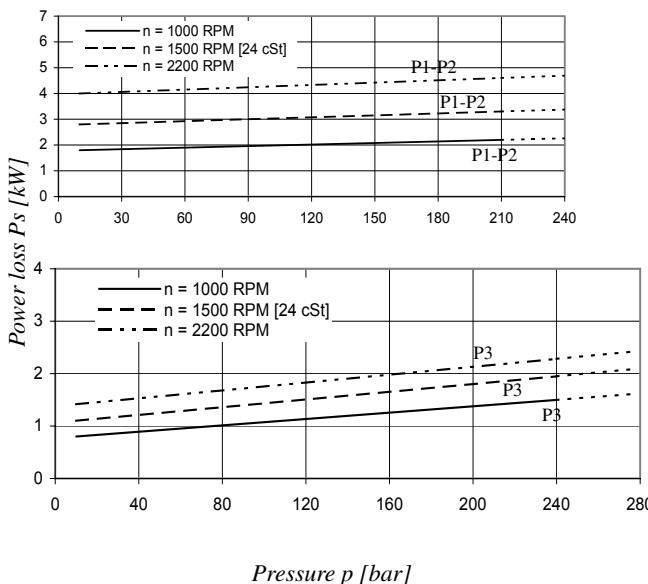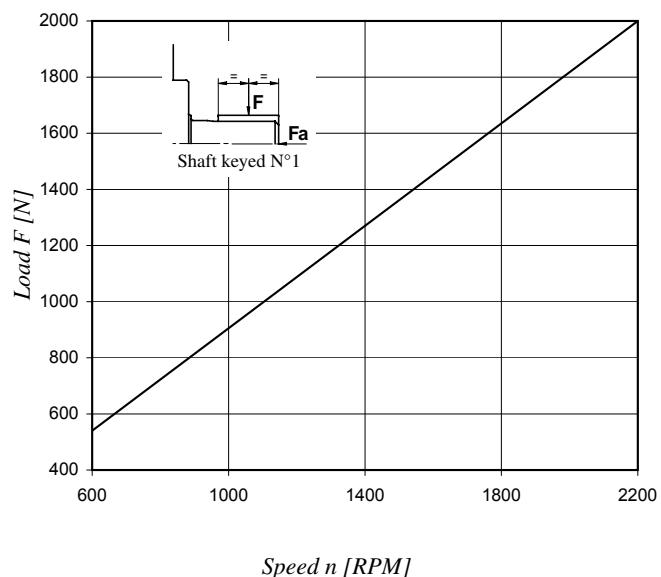POWER LOSS HYDROMECHANICAL (TYPICAL)**PERMISSIBLE RADIAL LOAD**

Total hydromechanical power loss is the sum of each section loss under its respective operating conditions.

Maximum permissible axial load Fa = 2000 N


Model No.	T7EEC or T7EECS - 062 - 062 - 017 - 2 R 00 - A 1 - M0 - ..			Modifications
T7EEC series - 250-B4-HW				Mounting w/connection variables
ISO 4 bolts 3019-2 mounting flange	P1	P2	P3	4 bolts SAE flange J518
T7EECS series - SAE E 4 bolts				P1 = 1.1/2" - P2 = 1.1/2" - P3 = 3/4" & 1" - S = 4"
J744 mounting flange				Metric UNC
Displacement for "P1" & "P2"				T7EEC - 3/4" M1
Volumetric displacement (ml/rev)				T7EECS - 3/4" M1 01
042 = 132,3	057 = 183,3			T7EEC - 1" M0
045 = 142,4	062 = 196,7			T7EECS - 1" M0 00
050 = 158,5	066 = 213,3			
052 = 164,8	072 = 227,1			
054 = 171,0	085 = 268,7			
Displacement for "P3"				Seal class
Volumetric displacement (ml/rev.)				1 = S1 BUNA N - 0,7 bar max. (for mineral oil)
003 = 10,8	017 = 58,3			
005 = 17,2	020 = 63,8			Design letter
006 = 21,3	022 = 70,3			Porting combination (see pages 72 - 73)
008 = 26,4	025 = 79,3			00 = standard
010 = 34,1	028 = 88,8			Direction of rotation (shaft end view)
012 = 37,1	031 = 100,0			R = Clockwise
014 = 46,0				L = Counter-clockwise
				Type of shaft T7EEC - T7EECS
				2 = keyed (ISO 3019/2 - G45N))
				Type of shaft T7EECS
				4 = splined 8/16 (SAE D & E) (13 teeth)




OPERATING CHARACTERISTICS - TYPICAL [24 cSt]

Pressure port	Series	Vi Volumetric displacement	Flow q_{v_e} [l/min] & n = 1500 RPM			Input power P [kW] & n = 1500 RPM		
			p = 0 bar	p = 140 bar	p = 240 bar	p = 7 bar	p = 140 bar	p = 240 bar
P1 & P2	042	132,3 ml/rev	198,5	188,5	181,3	5,2	49,4	82,6
	045	142,4 ml/rev	213,6	203,6	196,5	5,4	52,9	88,7
	050	158,5 ml/rev	237,7	227,7	220,6	5,7	58,5	98,3
	052	164,8 ml/rev	247,2	237,2	230,1	5,8	60,8	102,1
	054	171,0 ml/rev	256,5	246,5	239,4	5,9	63,0	105,8
	057	183,3 ml/rev	275,0	265,0	257,9	6,1	67,3	113,2
	062	196,7 ml/rev	295,0	285,0	277,9	6,4	71,9	121,3
	066	213,3 ml/rev	319,9	309,0	302,8	6,7	77,7	131,2
	072	227,1 ml/rev	340,6	330,6	323,5	6,9	82,6	139,5
	085	268,7 ml/rev	403,0	392,0 ²⁾	-	9,1	65,8 ²⁾	-
P3			p = 0 bar	p = 140 bar	p = 275 bar	p = 7 bar	p = 140 bar	p = 275 bar
	003	10,8 ml/rev	16,2	11,2	*	1,3	5,3	*
	005	17,2 ml/rev	25,8	20,8	16,1	1,4	7,5	13,9
	006	21,3 ml/rev	31,9	26,9	22,2	1,5	8,9	16,8
	008	26,4 ml/rev	39,6	34,6	29,9	1,6	10,7	20,3
	010	34,1 ml/rev	51,1	46,1	41,4	1,7	13,4	25,6
	012	37,1 ml/rev	55,6	50,6	45,9	1,7	14,4	27,6
	014	46,0 ml/rev	69,0	64,0	59,3	1,9	17,6	33,7
	017	58,3 ml/rev	87,4	82,4	77,7	2,1	21,9	42,2
	020	63,8 ml/rev	95,7	90,7	86,0	2,2	23,8	46,0
	022	70,3 ml/rev	105,4	100,4	95,7	2,3	26,1	50,4
	025	79,3 ml/rev	118,9	113,9	109,2	2,5	29,2	56,6
	028	88,8 ml/rev	133,2	128,2	125,8 ¹⁾	2,8	32,7	48,5 ¹⁾
	031	100,0 ml/rev	150,0	145,0	142,6 ¹⁾	2,8	36,5	54,4 ¹⁾

* We do not recommend to use the size 003 in P3 at 275 bar & 1500 RPM as the internal leakage is over 50% of theoretical flow.

¹⁾ 028 - 031 = 210 bar max.int.²⁾ 085 = 90 bar max.int.

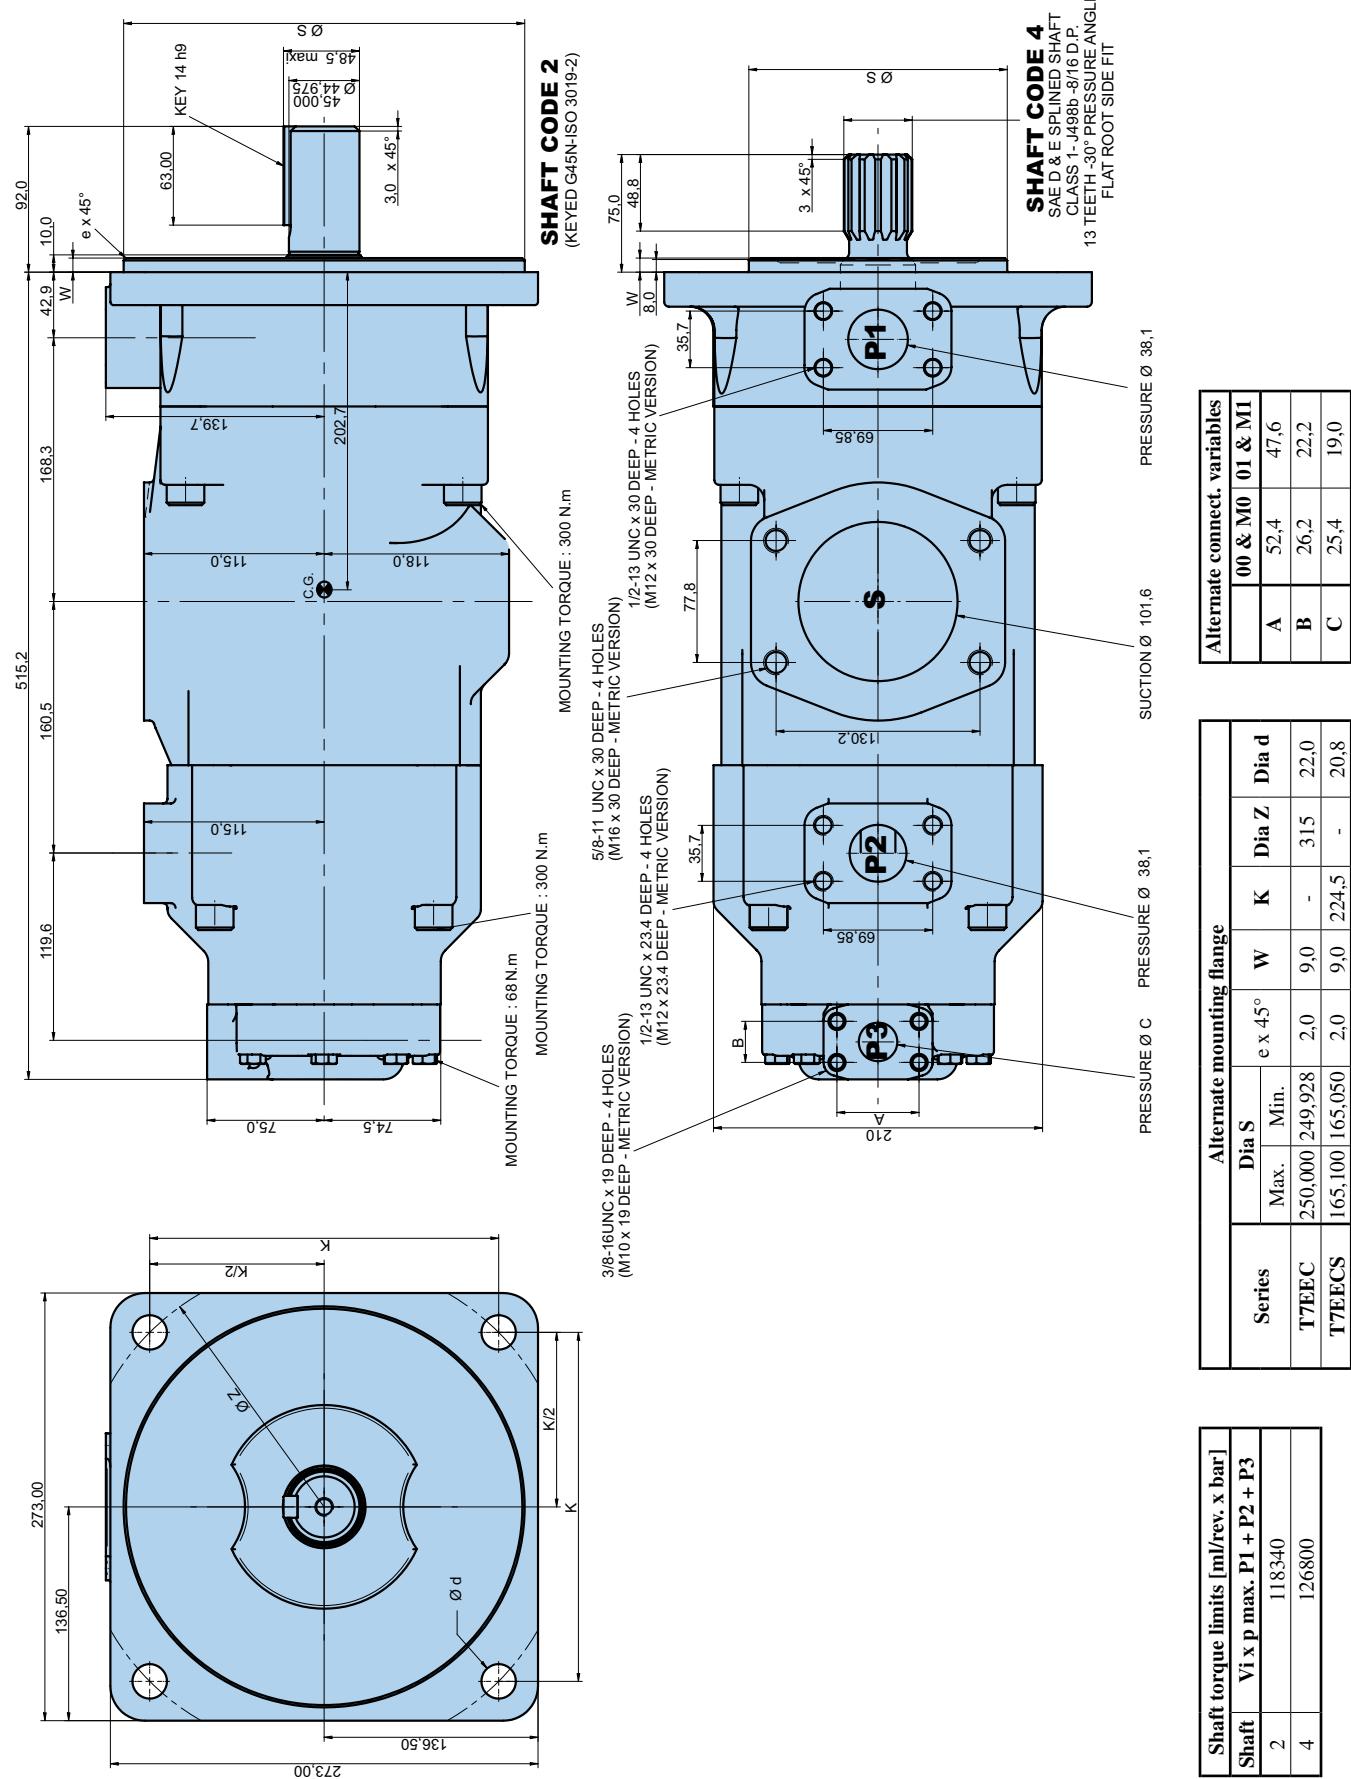

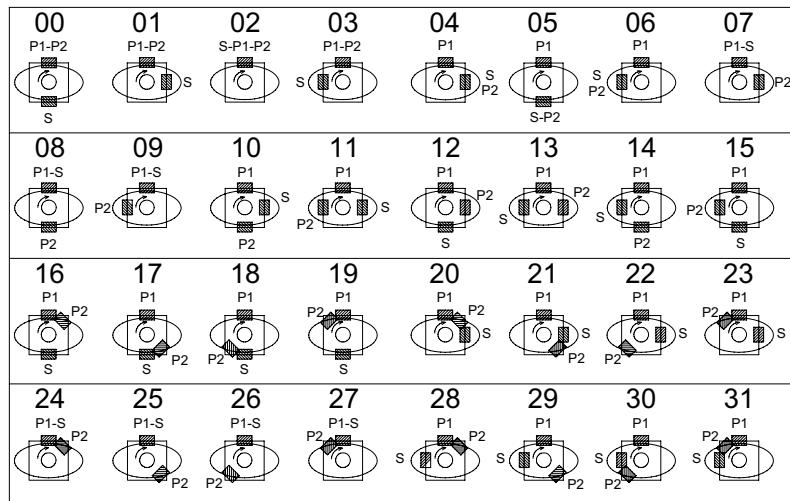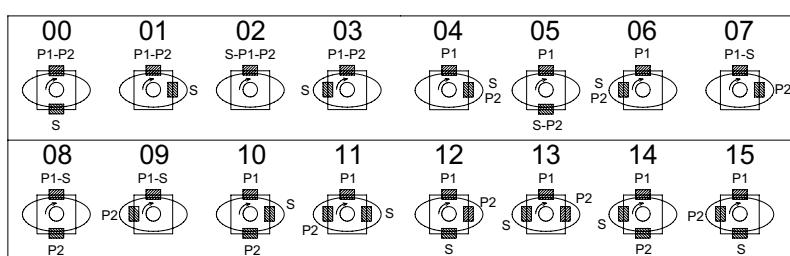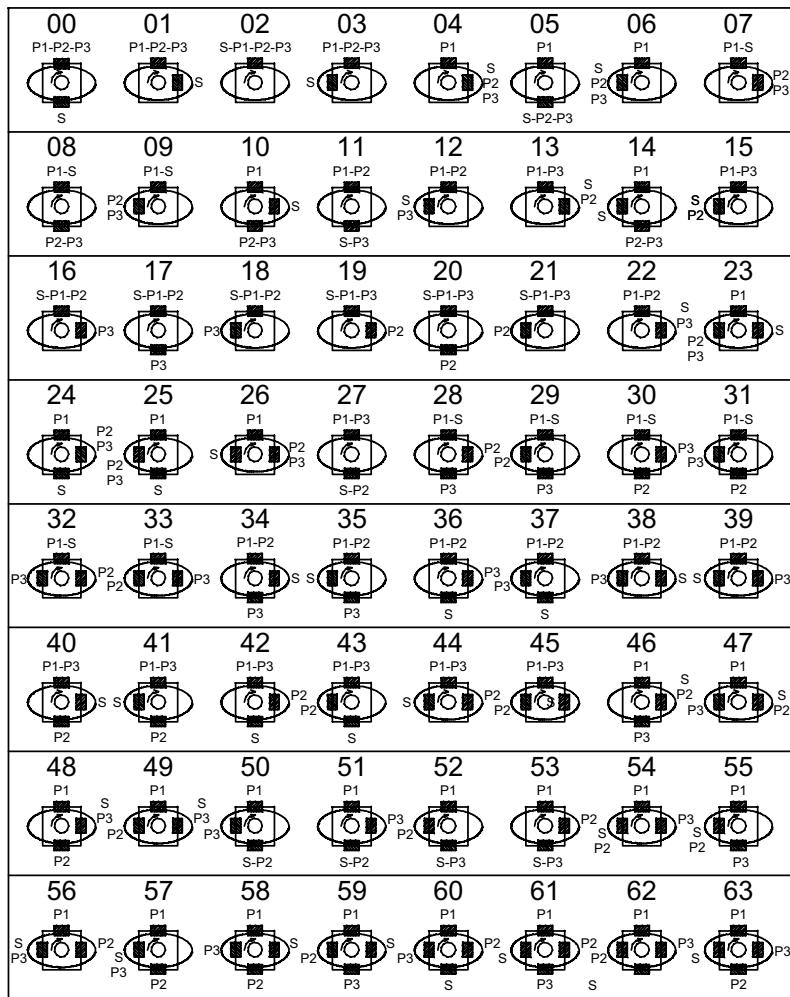T7BB/T7BBS**T6CC****T67CB****T7DB/T7DBS****T67DC****T7EB/T7EBS****T67EC****T7DD/T7DDS****T7ED/T7EDS****T7EE/T7EES****T7DBB/T7DBBS****T7DCB/T7DCBS****T7DCC/T7DCCS****T7DBB/T7DBBS****T67DDCS****T7EDB/T7EDBS****T67EDC/T67EDCS****T7EEC/T7EECS**

T7DBB/T7DBBS

T7DCB/T7DCBS

T7DCC/T7DCCS


T7DBB/T7DBBS

T67DDCS

T7EDB/T7EDBS

T67EDC/T67EDCS

T7EEC/T7EECS

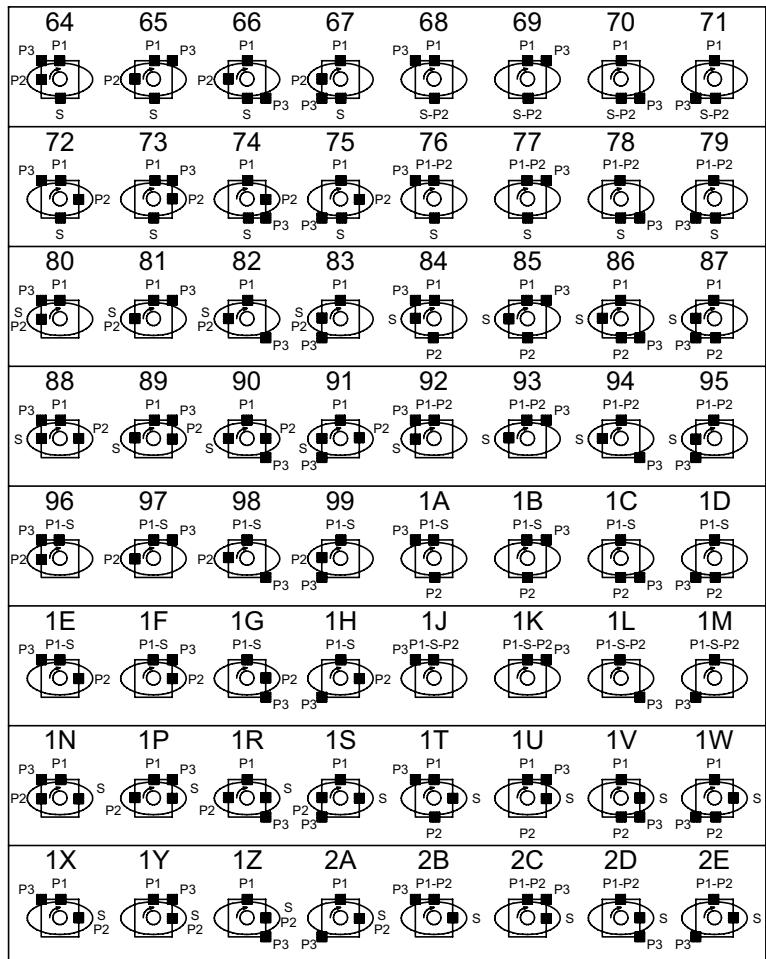

S	P2	P3				P2	P3			
		02	16	17	18		20	30	08	31
		19	07	28	32		21	33	29	09
		01	22	34	38		40	48	10	58
		13	04	46	47		45	49	59	23
		00	36	11	37		27	51	05	50
		42	24	53	60		43	62	52	25
		03	39	35	12		41	63	14	57
		44	26	61	56		15	54	55	06



WARNING — USER RESPONSIBILITY

FAILURE OR IMPROPER SELECTION OR IMPROPER USE OF THE PRODUCTS DESCRIBED HEREIN OR RELATED ITEMS CAN CAUSE DEATH, PERSONAL INJURY AND PROPERTY DAMAGE.

- This document and other information from Parker-Hannifin Corporation, its subsidiaries and authorized distributors provide product or system options for further investigation by users having technical expertise.
- The user, through its own analysis and testing, is solely responsible for making the final selection of the system and components and assuring that all performance, endurance, maintenance, safety and warning requirements of the application are met. The user must analyze all aspects of the application, follow applicable industry standards, and follow the information concerning the product in the current product catalog and in any other materials provided from Parker or its subsidiaries or authorized distributors.
- To the extent that Parker or its subsidiaries or authorized distributors provide component or system options based upon data or specifications provided by the user, the user is responsible for determining that such data and specifications are suitable and sufficient for all applications and reasonably foreseeable uses of the components or systems.

Offer of Sale

Please contact your Parker representation for a detailed "Offer of Sale".

Parker Worldwide

AE – UAE, Dubai
Tel: +971 4 8127100
parker.me@parker.com

AR – Argentina, Buenos Aires
Tel: +54 3327 44 4129

AT – Austria, Wiener Neustadt
Tel: +43 (0)2622 23501-0
parker.austria@parker.com

AT – Eastern Europe,
Wiener Neustadt
Tel: +43 (0)2622 23501 900
parker.easternEurope@parker.com

AU – Australia, Castle Hill
Tel: +61 (0)2-9634 7777

AZ – Azerbaijan, Baku
Tel: +994 50 2233 458
parker.azerbaijan@parker.com

BE/LU – Belgium, Nivelles
Tel: +32 (0)67 280 900
parker.belgium@parker.com

BR – Brazil, Cachoeirinha RS
Tel: +55 51 3470 9144

BY – Belarus, Minsk
Tel: +375 17 209 9399
parker.belarus@parker.com

CA – Canada, Milton, Ontario
Tel: +1 905 693 3000

CH – Switzerland, Etoy
Tel: +41 (0) 21 821 02 30
parker.switzerland@parker.com

CL – Chile, Santiago
Tel: +56 2 623 1216

CN – China, Shanghai
Tel: +86 21 2899 5000

CZ – Czech Republic, Klicany
Tel: +420 284 083 111
parker.czechrepublic@parker.com

DE – Germany, Kaarst
Tel: +49 (0)2131 4016 0
parker.germany@parker.com

DK – Denmark, Ballerup
Tel: +45 43 56 04 00
parker.denmark@parker.com

ES – Spain, Madrid
Tel: +34 902 330 001
parker.spain@parker.com

FI – Finland, Vantaa
Tel: +358 (0)20 753 2500
parker.finland@parker.com

FR – France, Contamine s/Arve
Tel: +33 (0)4 50 25 80 25
parker.france@parker.com

GR – Greece, Athens
Tel: +30 210 933 6450
parker.greece@parker.com

HK – Hong Kong
Tel: +852 2428 8008

HU – Hungary, Budapest
Tel: +36 1 220 4155
parker.hungary@parker.com

IE – Ireland, Dublin
Tel: +353 (0)1 466 6370
parker.ireland@parker.com

IN – India, Mumbai

Tel: +91 22 6513 7081-85

IT – Italy, Corsico (MI)
Tel: +39 02 45 19 21
parker.italy@parker.com

JP – Japan, Fujisawa

Tel: +(81) 4 6635 3050

KR – South Korea, Seoul
Tel: +82 2 559 0400

KZ – Kazakhstan, Almaty
Tel: +7 7272 505 800
parker.easternEurope@parker.com

LV – Latvia, Riga
Tel: +371 6 745 2601
parker.latvia@parker.com

MX – Mexico, Apodaca
Tel: +52 81 8156 6000

MY – Malaysia, Shah Alam
Tel: +60 3 7849 0800

NL – The Netherlands,
Oldenzaal
Tel: +31 (0)541 585 000
parker.nl@parker.com

NO – Norway, Ski
Tel: +47 64 91 10 00
parker.norway@parker.com

NZ – New Zealand, Mt Wellington
Tel: +64 9 574 1744

PL – Poland, Warsaw
Tel: +48 (0)22 573 24 00
parker.poland@parker.com

PT – Portugal, Leca da Palmeira
Tel: +351 22 999 7360
parker.portugal@parker.com

RO – Romania, Bucharest
Tel: +40 21 252 1382
parker罗马尼亞@parker.com

RU – Russia, Moscow
Tel: +7 495 645-2156
parker.russia@parker.com

SE – Sweden, Spånga
Tel: +46 (0)8 59 79 50 00
parker.sweden@parker.com

SG – Singapore
Tel: +65 6887 6300

SK – Slovakia, Banská Bystrica
Tel: +421 484 162 252
parker.slovakia@parker.com

SL – Slovenia, Novo Mesto
Tel: +386 7 337 6650
parker.slovenia@parker.com

TH – Thailand, Bangkok
Tel: +662 717 8140

TR – Turkey, Istanbul
Tel: +90 216 4997081
parker.turkey@parker.com

TW – Taiwan, Taipei
Tel: +886 2 2298 8987

UA – Ukraine, Kiev
Tel: +380 44 494 2731
parker.ukraine@parker.com

UK – United Kingdom,
Warwick
Tel: +44 (0)1926 317 878
parker.uk@parker.com

US – USA, Cleveland
(industrial)
Tel: +1 216 896 3000

US – USA, Lincolnshire
(mobile)
Tel: +1 847 821 1500

VE – Venezuela, Caracas
Tel: +58 212 238 5422

ZA – South Africa,
Kempton Park
Tel: +27 (0)11 961 0700
parker.southafrica@parker.com

European Product Information Centre
Free phone: 00 800 27 27 5374
(from AT, BE, CH, CZ, DE, DK, EE, ES, FI,
FR, IE, IL, IS, IT, LU, MT, NL, NO, PL, PT, RU,
SE, UK, ZA)

© 2009 Parker Hannifin Corporation. All rights reserved.

Catalogue HY29-0001/UK. XM 10/2009 PC

HYGE Ed. 2009-10-01



Parker Hannifin Ltd.
Tachbrook Park Drive
Tachbrook Park, Warwick CV34 6TU
United Kingdom
Tel.: +44 (0) 1926 317 878
Fax: +44 (0) 1926 317 855
www.parker.com

Your local authorized Parker distributor