

Non-Return Valves

Non-return valves allow compressed air to flow in one direction and prevent it from flowing in the other. Fitted upstream of the circuit to be protected, they provide **total protection**.

Product Advantages

Variety of Applications	Wide range
	Push-in connection: ease of use Available in threaded or push-in version
Powerful Design	Tried and tested durability according to DI 2006/42/CE
	Lip seals for improved sealing performance
	Excellent vibration resistance
	Compact
	Lightweight
	Symbol showing the operating direction of flow
	Safe installation with colour codes: <ul style="list-style-type: none">• green push-button: supply version• red push-button: exhaust version




Automotive Process
Robotics
Vacuum
Textile
Semi-Conductors
Packaging
Pneumatics

Applications

Technical Characteristics

Compatible Fluids	Compressed air	
Working Pressure	1 to 10 bar	
Working Temperature	0°C to +70°C	
Cracking Pressure	0.3 bar	
Flow Characteristics (Nl/min)	Model	Flow at 6 bar
	4 mm	350
	6 mm	670
	8 mm	1080
	10 mm	2230
	12 mm	2300

Component Materials

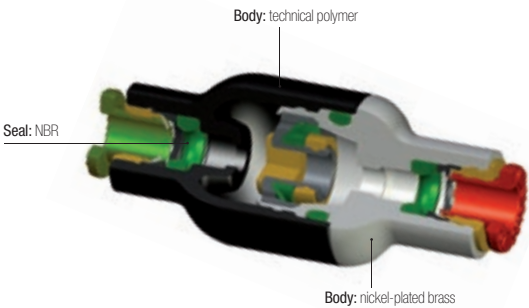

Silicone-free

Regulations

DI: 2002/95/EC (RoHS)
RG: 1907/2006 (REACH)
DI: 97/23/EC (PED)

DI : 2006/42/EC (Machine Directive)
test according to ISO 19973-5. B10d (1Hz)
>40 millions of cycles

Operation

In-Line Version

Supply Version

Models 7984-7985

Exhaust Version


Models 7994-7995

Installation Diagram

Non-Return Valves

7996 In-Line Equal Non-Return Valve


Technical polymer, nickel-plated brass, NBR



ØD		G	L	Kg
4	7996 04 00	16	38.5	0.008
6	7996 06 00	16	41	0.013
8	7996 08 00	19	51.5	0.017
10	7996 10 00	23	63.5	0.070
12	7996 12 00	23	66.5	0.050

7984 In-Line Non-Return Valve, Supply, Male BSPP and Metric Thread


Technical polymer, nickel-plated brass, NBR



ØD	C		E	F	H	Kg
4	M5x0.8	7984 04 19	3	9	32	0.008
	G1/8	7984 04 10	5	16	28.5	0.015
6	G1/8	7984 06 10	5	16	30.5	0.015
	G1/4	7984 06 13	5.5	16	30.5	0.015
8	G1/8	7984 08 10	5	19	36	0.021
	G1/4	7984 08 13	5.5	19	36	0.023
10	G3/8	7984 10 17	5.5	23	42	0.047
12	G3/8	7984 12 17	5.5	23	42	0.010
	G1/2	7984 12 21	7.5	23	44	0.041

7994 In-Line Non-Return Valve, Exhaust, Male BSPP and Metric Thread


Technical polymer, nickel-plated brass, NBR



ØD	C		E	F	H	Kg
4	M5x0.8	7994 04 19	3	9	32	0.790
	G1/8	7994 04 10	5	16	28.5	0.018
6	G1/8	7994 06 10	5	16	30.5	0.015
	G1/4	7994 06 13	5.5	16	30.5	0.015
8	G1/8	7994 08 10	5	19	36	0.023
	G1/4	7994 08 13	5.5	19	36	0.023
10	G3/8	7994 10 17	5.5	23	42	0.050
12	G3/8	7994 12 17	5.5	23	42	0.043
	G1/2	7994 12 21	7.5	23	44	0.045

7985 In-Line Non-Return Valve, Supply, Male BSPT Thread

Technical polymer, nickel-plated brass, NBR




ØD	C		F	H	Kg
4	R1/8	7985 04 10	16	28.5	0.016
6	R1/8	7985 06 10	16	30.5	0.016
	R1/4	7985 06 13	16	30.5	0.021
8	R1/8	7985 08 10	19	36	0.022
	R1/4	7985 08 13	19	36	0.020
10	R3/8	7985 10 17	23	42	0.049
12	R3/8	7985 12 17	23	42	0.042
	R1/2	7985 12 21	23	44	0.048

Pre-coated thread

7995 In-Line Non-Return Valve, Exhaust, Male BSPT Thread

Technical polymer, nickel-plated brass, NBR



ØD	C		F	H	Kg
4	R1/8	7995 04 10	16	28.5	0.015
6	R1/8	7995 06 10	16	30.5	0.016
	R1/4	7995 06 13	16	30.5	0.022
8	R1/8	7995 08 10	19	36	0.022
	R1/4	7995 08 13	19	36	0.026
10	R3/8	7995 10 17	23	42	0.048
12	R3/8	7995 12 17	23	42	0.042
	R1/2	7995 12 21	23	44	0.048

Pre-coated thread