

Manually-Operated Valves

Manually-operated valves offer a **reliable** and **durable** system for opening and closing the circuit when the system has to be **switched frequently**. They provide a significant reduction in the time needed to work on pneumatic circuits.

Product Advantages

Manual Switch-Operated Valves

- Downstream control supply provided by simply moving the lever
- 2 models available to provide the best solution for the system:
 - 3/2: opening, closing, venting
 - 2/2: opening, closing
- Compact and ergonomic (can be positioned through 360°)
- Push-in connections

Valves with Sliding Sleeve

- Uni-directional use ensures the downstream circuit is vented
- Operated in the plane of the tube
- Lightweight due to the use of aluminium
- Ideal for complex installations in a restricted space
- Immediate identification of the venting system by the colour (red)



Robotics
Conveyors
Textile
Plastics Engineering
Printing
Pneumatics
Packaging

Applications

Technical Characteristics

Compatible Fluids	Compressed air
Working Pressure	0 to 10 bar Model 0669: 0 to 16 bar
Working Temperature	-10°C to +80°C Model 0669: -5°C to +70°C

Component Materials


Seals: NBR

Bolt:

Manual switch-operated valve: nickel-plated brass with seal
Sleeve valve: nickel-plated brass

Body:

Manual switch-operated valve: technical polymer
Sleeve valve: nickel-plated brass




Silicone-free

Regulations


- DI: 2002/95/EC (RoHS)
- RG: 1907/2006 (REACH)
- DI: 97/23/EC (PED)

Operation

Switch-Operated Valves

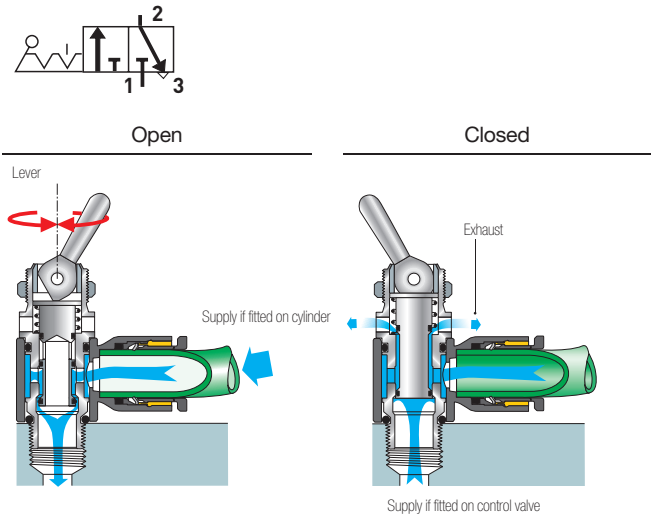


Sleeve Valves

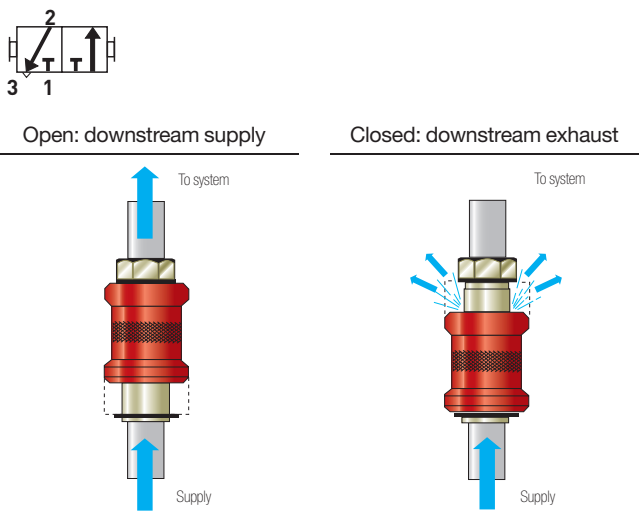

Manually-Operated Valves

7800 3/2 Manual Switch-Operated Valve, Supply, Male BSPP and Metric Thread

Technical polymer, nickel-plated brass, NBR




ØD	C		F	F1	H	L1	L2	Kg
4	M5x0.8	7800 04 19	14	14	55	7	18.5	0.032
	G1/8	7800 04 10	14	14	43	7	18.5	0.022
6	M5x0.8	7800 06 19	14	14	55	7	18.5	0.032
	G1/8	7800 06 10	14	14	43	7	20	0.023
8	G1/4	7800 08 13	17	14	50.5	9	22	0.048
	G1/8	7800 08 10	14	14	43	7	25	0.023
10	G1/4	7800 10 13	17	14	50.5	9	29	0.048
	G1/8	7800 10 13	17	14	50.5	9	29	0.048

For part numbers 7800 04 19 and 7800 06 19, adaptor sealing is effected by a flat PTFE seal and tightening torque is maximum 0.16 daN.m.

7801 3/2 Manual Switch-Operated Valve, Control, Male BSPP Thread


Technical polymer, nickel-plated brass, NBR



ØD	C		F	F1	H	L1	L2	Kg
4	G1/8	7801 04 10	14	14	43	7	18.5	0.023
6	G1/8	7801 06 10	14	14	43	7	20	0.023
	G1/4	7801 06 13	17	14	50.5	9	22	0.048
8	G1/8	7801 08 10	14	14	43	7	25	0.026
	G1/4	7801 08 13	17	14	50.5	9	27	0.049
10	G1/4	7801 10 13	17	14	50.5	9	29	0.051

7802 2/2 Manual Switch-Operated Valve, Male BSPP Thread


Technical polymer, nickel-plated brass, NBR



ØD	C		F	F1	H	L1	L2	Kg
4	G1/8	7802 04 10	14	14	43	7	18.5	0.023
6	G1/8	7802 06 10	14	14	43	7	20	0.023
	G1/4	7802 06 13	17	14	50.5	9	22	0.051
8	G1/8	7802 08 10	14	14	43	7	25	0.024
	G1/4	7802 08 13	17	14	50.5	9	27	0.052
10	G1/4	7802 10 13	17	14	50.5	9	29	0.052

0669 3/2 Sleeve Valve, Female BSPP and Metric Thread

Nickel-plated brass, NBR



C	DN		F	G	L	Kg
M5x0.8	2.5	0669 02 19	10	14	30.5	0.012
G1/8	4	0669 04 10	14	25	48	0.050
G1/4	7	0669 07 13	19	30	58	0.095
G3/8	10	0669 10 17	22	35	68	0.154
G1/2	14	0669 14 21	27	40	75	0.209
G3/4	19	0669 19 27	32	50	83	0.323