




## 483510 Series - Standard Bi-Frequency Coil F Class - IP65

Encapsulated in synthetic material. Connector for 2P+E DIN 43650 A Plug. IP65 insulation class to be considered with connector plug only.

This coil conforms to the IEC/CENELEC safety standards and complies with European low-voltage directive 73/23/EC.

<b>Voltage tolerances:</b>	-10% to +10% of the nominal voltage (AC).
<b>Duty:</b>	Continuous duty coil (100%ED).
<b>Weight:</b>	130 g without plug.

Voltage	Power Consumption	Reference	Approvals	Ambient Temperature	Class of Insulation	Dimensional Drawing
12/50-60	9 W	<b>4835101W</b>	-	-40°C to +50°C	F Class 155°C	23
24/50-60	9 W	<b>483510P0</b>	VDE	-40°C to +50°C	F Class 155°C	23
48/50-60	9 W	<b>483510S6</b>	VDE	-40°C to +50°C	F Class 155°C	23
110-115/50 120/60	9 W	<b>483510S5</b>	VDE	-40°C to +50°C	F Class 155°C	23
220-240/50 240/60	9 W	<b>483510S6</b>	VDE	-40°C to +50°C	F Class 155°C	23

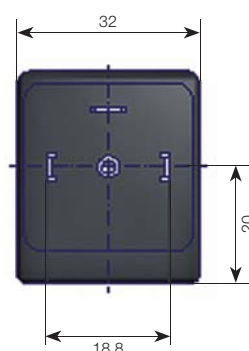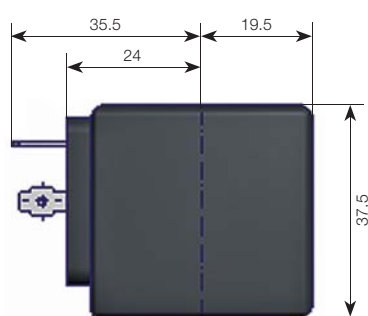

All dimensions are in mm

Dimensional Drawing N° 23