

Miniature Regulator

RB3 Brass

RA3 Aluminum

 = "Most Popular"

Specifications

Flow Capacity*	1/4	14 SCFM (6.6 dm ³ /s)
Maximum Supply Pressure	300 PSIG (20.7 bar)	
Operating Temperature	40° to 125°F (4.4° to 52°C)	
Port Size	NPT / BSPP-G	1/8, 1/4
Weight	lb. (kg)	0.5 (0.23)

* Inlet pressure 100 PSIG (6.9 bar). Secondary pressure 90 PSIG (6.2 bar).
(flow at 25% pressure drop)

Materials of Construction

Body	RB3	Brass
	RA3	Aluminum
Bonnet	Acetal	
Diaphragm & Seals	Nitrile	
Valve Assembly & Bottom Plug	Brass	

Note: Panel Nut included, but not shown on dimensional drawing.

Note: 1.19" dia. (30.2) mm hole required for panel mounting.


WARNING

Product rupture can cause serious injury.
Do not connect regulator to bottled gas.
Do not exceed maximum primary pressure rating.

CAUTION:

REGULATOR PRESSURE ADJUSTMENT – The working range of knob adjustment is designed to permit outlet pressures within their full range. Pressure adjustment beyond this range is also possible because the knob is not a limiting device. This is a common characteristic of most industrial regulators, and limiting devices may be obtained only by special design.


For best performance, regulated pressure should always be set by increasing the pressure up to the desired setting.



RB3-02-F000

Features

- Brass Body Construction Handles Water and Compressed Air Service
- Large Diaphragm to Valve Area Ratio for Precise Regulation and High Flow Capacity
- Spring Loaded Diaphragm
- High Flow: 1/4" -14 SCFM
- Panel Mount Nut Standard
- Two 1/8" Gauge Ports

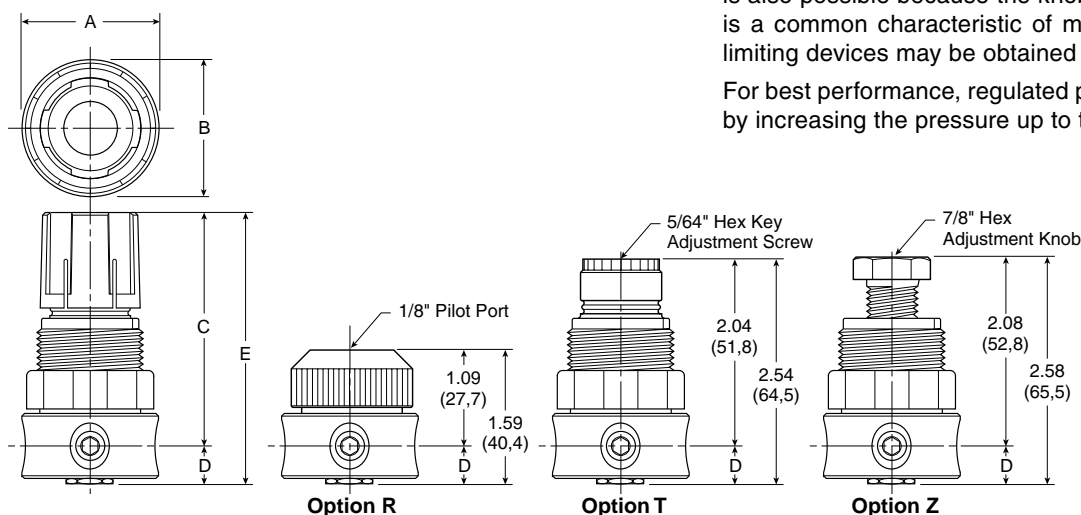

Dimensions




Model	Inches (mm)	A	B	C	D	E
Brass Regulator - Miniature RB3-XX-XXXX		1.56 (39.8)	1.56 (39.8)	2.56 (65)	.50 (12.7)	3.06 (77.7)
Aluminum Regulator - Miniature RA3-XX-XXXX		1.56 (39.8)	1.56 (39.8)	2.56 (65)	.50 (12.7)	3.06 (77.7)

Repair Kits

Bonnet, Knob, Adjusting Screw Kit.....	RRP-96-821
Bonnet, Tamper Resistant Adjustment Kit.....	RRP-96-822
Repair Kit –	
Relieving.....	RRP-96-824
Non-relieving	RRP-96-825

Accessories

Pressure Gauge –	
0-160 PSI (0-11,0 bar), 1-1/2" Dial Face,	
1/8" NPT, CBM	K4515N18160
0-60 PSI (0-4,1 bar), 1-1/2" Dial Face,	
1/8" NPT	K4515N18060
Panel Mount Nut –	
Aluminum.....	RPA-96-733
Plastic	RPA-96-734
Wall Mounting Bracket –	
L-Type	GRP-95-147
L-Type with Plastic Panel Mount Nut.....	GRP-95-747

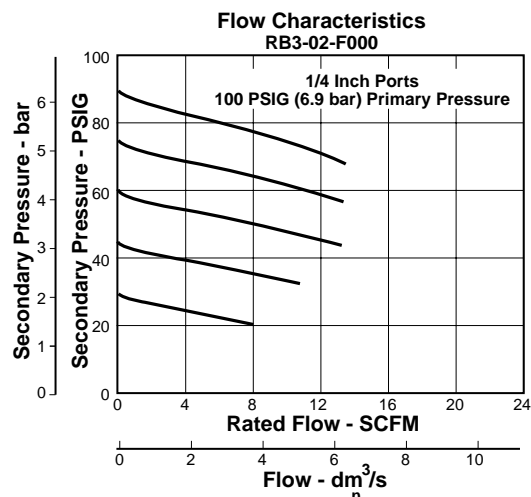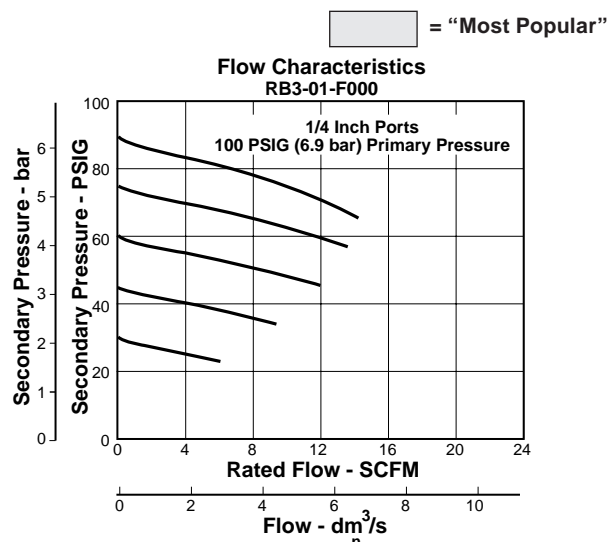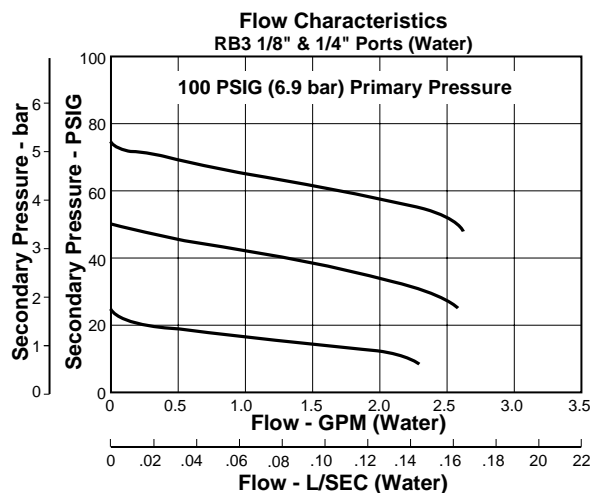

Ordering Information


Model Type	Port Size	Without Gauge 2 to 125 PSI (0.14 to 8.6 bar)	Without Gauge 1 to 60 PSI (0.07 to 4.1 bar)	Without Gauge 1-25 PSI (0.07 to 1.7 bar)
Relieving	1/8"	RB3-01-F000	RB3-01-D000	RB3-01-C000
	1/4"	RB3-02-F000	RB3-02-D000	RB3-02-C000
Non-relieving	1/8"	RB3-01-R000	RB3-01-W000	RB3-01-P000
	1/4"	RB3-02-R000	RB3-02-W000	RB3-02-P000
Relieving	1/8"	RA3-01-F000	RA3-01-D000	RA3-01-C000
	1/4"	RA3-02-F000	RA3-02-D000	RA3-02-C000
Non-relieving	1/8"	RA3-01-R000	RA3-01-W000	RA3-01-P000
	1/4"	RA3-02-R000	RA3-02-W000	RA3-02-P000

Options - To order an option supplied with the unit model, add the appropriate coded suffix letter in the designated position of the model number.

RB3 / RA3 Series Regulator

Numbering System

= "Most Popular"

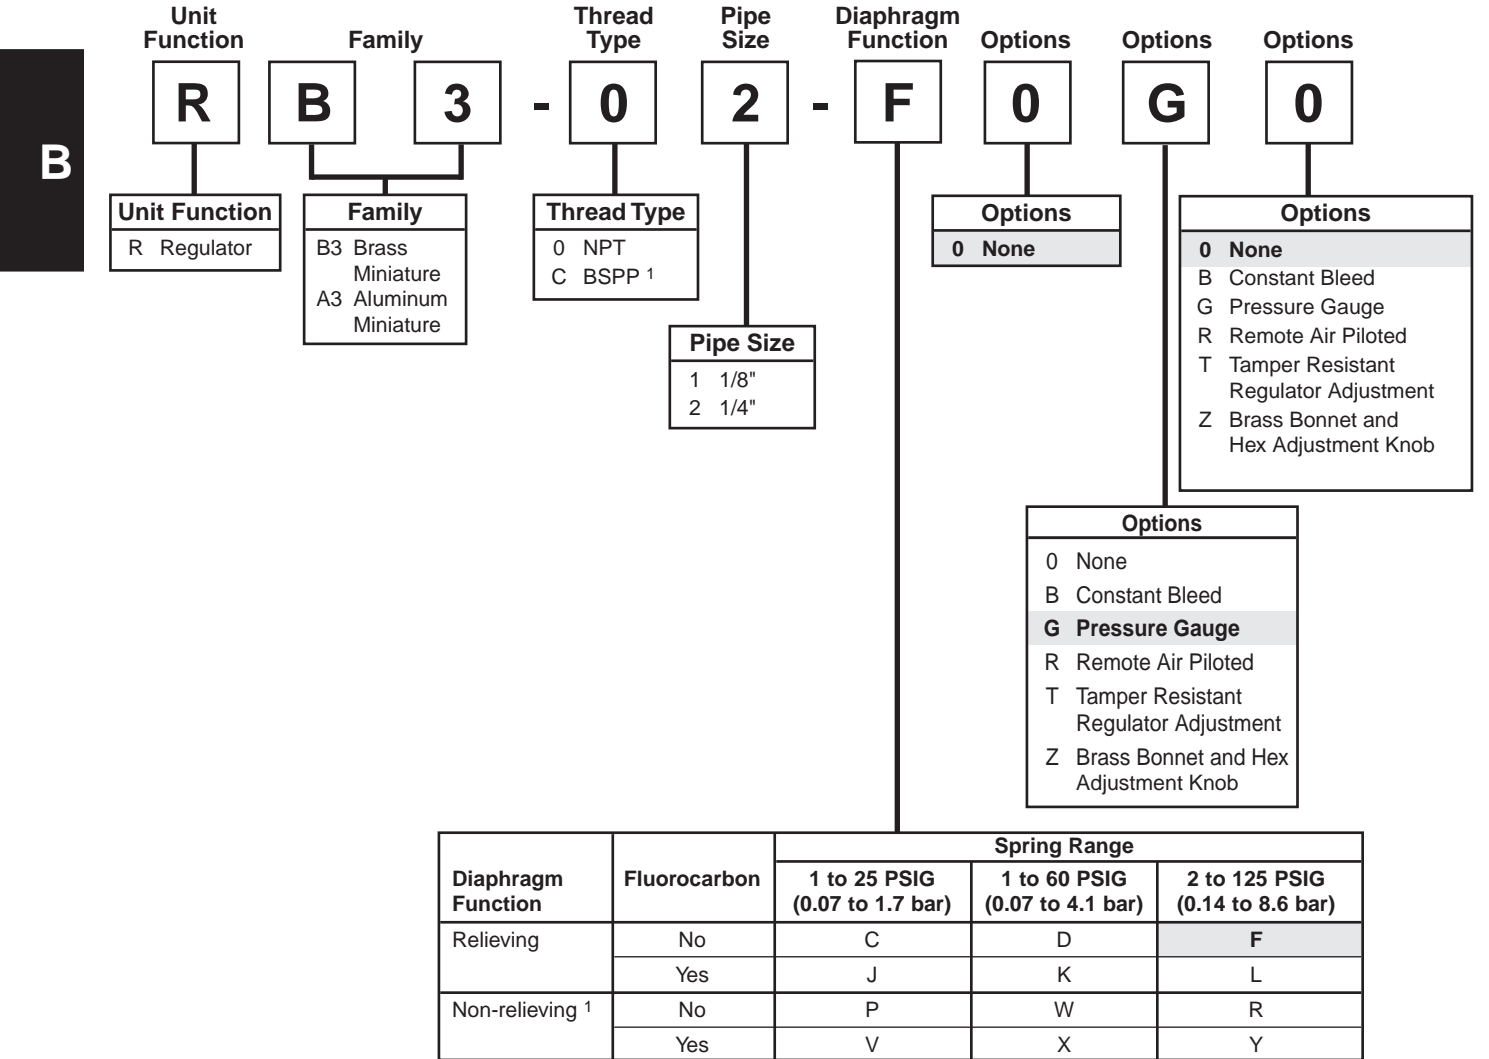

¹ ISO, R228 (G Series)

NOTE: Standard pressure adjustment is plastic “snap lock” knob and plastic bonnet with plastic panel mount nut.

NOTE: When selecting from the options columns, please enter letters in alphabetical order for positions 8, and 9.
For example:

RB3 - 0 3 - F 0 G T