



Regulator R08



Relieving



Non-Relieving




R08-01-F0G0





R08-01-F000

Features

- Balanced Valve Design
- 2 Gauge Ports
- Serviceability and Ease of Maintenance
- Unique Flush-mounted Pressure Gauge
- Light Weight
- Modern Design and Appearance



R08-XX-F0G0



R08-XX-F000

NOTES: Flush mounted gauge kits will not fit units originally purchased with threaded gauge ports.
1.25" Dia. (31.7 mm) hole required for panel nut mounting.

Dimensions

Models	Inches (mm)	A	B	C	D	E	F
Standard Unit R08-XX-F000		1.58 (40)	1.58 (40)	1.34 (34)	2.60 (66)	3.94 (100)	2.40 (61)
With Gauge R08-XX-F0G0		1.58 (40)	2.53 (64)	2.60 (66)	1.34 (34)	3.94 (100)	2.40 (61)

 = "Most Popular"

Specifications

Flow Capacity*	1/8	29.2 SCFM (13.5 dm ³ /s)
	1/4	44.0 SCFM (18.9 dm ³ /s)
Adjusting Range Pressure		0 to 30 PSIG (0 to 2.1 bar)
		0 to 60 PSIG (0 to 4.1 bar)
		0 to 125 PSIG (0 to 8.6 bar)

Gauge Port (2 ea.)** NPT	1/8
Maximum Supply Pressure	300 PSIG (20.7 bar)
Operating Temperature	32° to 150°F (0° to 65.5°C)
Port Size	NPT / BSPP-G 1/8, 1/4
Weight	lb. (kg) .66 (0.3)

* Inlet pressure 100 PSIG (6.9 bar). Secondary pressure 90 PSIG (6.2 bar).

** Non-gauge option only.

Materials of Construction

Adjustment Knob	Acetal
Body	Zinc
Body Cap	ABS
Bonnet	PBT
Bottom Plug	33% Glass-Filled Nylon
Diaphragm Assembly	Brass / Nitrile
Panel Nut	Acetal
Seals	Nitrile
Springs	Steel
Valve Assembly	Brass / Nitrile

WARNING

**Product rupture can cause serious injury.
Do not connect regulator to bottled gas.
Do not exceed maximum primary pressure rating.**

CAUTION:

REGULATOR PRESSURE ADJUSTMENT – The working range of knob adjustment is designed to permit outlet pressures within their full range. Pressure adjustment beyond this range is also possible because the knob is not a limiting device. This is a common characteristic of most industrial regulators, and limiting devices may be obtained only by special design.

For best performance, regulated pressure should always be set by increasing the pressure up to the desired setting.



 = "Most Popular"

Replacement Kits

Diaphragm Assembly –	
Non-relieving	GRP-96-726
Relieving	GRP-96-725
Spring, Regulating –	
0 to 30 PSIG (0 to 2.1 bar)	GRP-95-111
0 to 60 PSIG (0 to 4.1 bar)	GRP-96-718
0 to 125 PSIG (0 to 8.6 bar)	GRP-96-717
Valve Assembly	RRP-96-727
Valve Spring	RRP-96-728

Accessories

Adjusting Knob	RRP-16-005-000
Bottom Plug	RRP-16-383-000
Gauge Adapter Block, 1/4" NPT,	GPA-97-037
Replaces Flush Mount Gauge	
Panel Mount Nut –	
Aluminum	RPA-96-733
Plastic	RPA-96-734
Pressure Gauge, Flush Mounted –	
0 to 150 PSIG	K4511SCR150
0 to 60 PSIG	K4511SCR060
0 to 11 bar	K4511SCR11B
Pressure Gauge, 0 to 60 PSIG (0 to 4.1 bar),	
1-1/2" Dial Face, 1/8 NPT, CBM	K4515N18060
Pressure Gauge, 0 to 160 PSIG (0 to 11.0 bar),	
1-1/2" Dial Face, 1/8 NPT, CBM	K4515N18160
Tamper Resistant Kit	RPA-96-735
Wall Mounting Bracket –	
C-Type	GPA-97-010
L-Type	GRP-96-739
T-Type	GPA-96-737

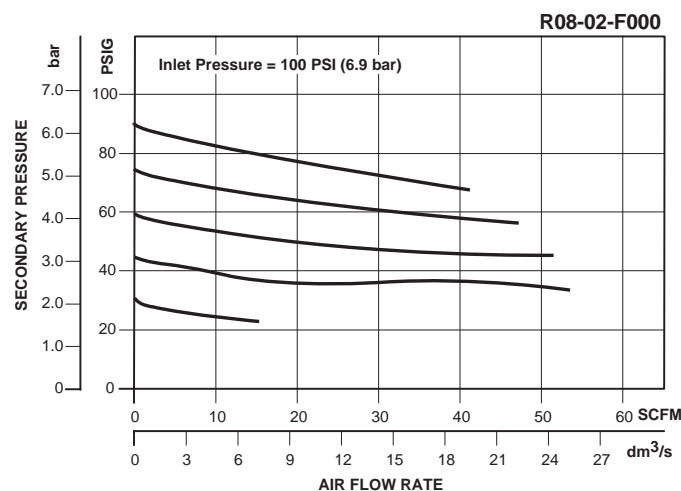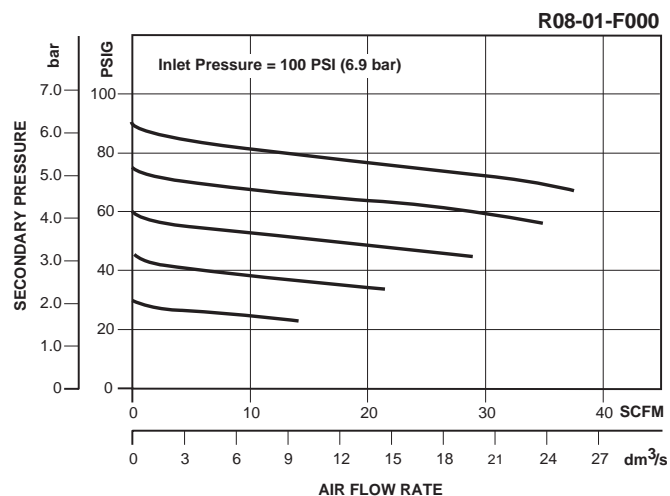

Ordering Information

Model Type	Port Size	With Gauge 0 to 125 PSIG (0 to 8.6 bar)	With Gauge 0 to 30 PSIG (0 to 2.1 bar)	With Gauge 0 to 60 PSIG (0 to 4.1 bar)	Without Gauge 0 to 125 PSIG (0 to 8.6 bar)	Without Gauge 0 to 30 PSIG (0 to 2.1 bar)	Without Gauge 0 to 60 PSIG (0 to 4.1 bar)
Relieving	1/8	R08-01-F0G0	R08-01-C0G0	R08-01-D0G0	R08-01-F000	R08-01-C000	R08-01-D000
	1/4	R08-02-F0G0	R08-02-C0G0	R08-02-D0G0	R08-02-F000	R08-02-C000	R08-02-D000
Non-relieving	1/8	R08-01-R0G0	R08-01-P0G0	R08-01-W0G0	R08-01-R000	R08-01-P000	R08-01-W000
	1/4	R08-02-R0G0	R08-02-P0G0	R08-02-W0G0	R08-02-R000	R08-02-P000	R08-02-W000

Options - To order an option supplied with the unit model, add the appropriate coded suffix letter in the designated position of the model number.

Regulator Numbering System

= "Most Popular"

Unit Function

R

Unit Function

R Regulator

Family

18

Family

08 Miniature
18 Compact
28 Standard
39 Jumbo

Thread Type

0

Thread Type

0 NPT
C BSPP³

Pipe Size

3

Code	Pipe Size	08	18	28	39
1	1/8"	X			
2	1/4"	X	X		
3	3/8"		X	X	
4	1/2"		X	X	
6	3/4"			X	X
8	1"				X

Diaphragm Function

F

Diaphragm Function ⁵	Fluorocarbon ¹	0 to 30 PSIG ¹ (0 to 2.1 bar)	0 to 60 PSIG ¹ (0 to 4.1 bar)	0 to 125 PSIG (0 to 8.6 bar)	0 to 200 PSIG ^{1,6} (0 to 13.7 bar)	0 to 250 PSIG ^{1,6} (0 to 17.2 bar)
Relieving	No	C	D	F	H	G
	Yes	J	K	L	N	M
Non-relieving	No	P	W	R	T	S
	Yes	V	X	Y	U	Z

Options

0

Options

0 None

Options

G

Options

0 None
C Tamper Resistant Regulator Adj^{1,2}
G Pressure Gauge⁴
P Metal Panel Nut (08, 18 & 28 Only)
R Reverse Flow (08, 18 & 28 Only)

Options

0

B

¹ Not Available on 39 Series.

² Tamper kit not installed. Kit is shipped loose in carton, for 08, 18 & 28 NPT units.

³ ISO, R228 (G Series).

⁴ For 08 Series only: "G" in position 8 or 9 is for unit with flush mounted pressure gauge. Units without gauge have 1/8" threaded gauge ports, and a center back mounted pressure gauge must be ordered separately.

⁵ 39 Series is piston type.

⁶ Not Available on 08 Series.

NOTE: When selecting from the options columns, please enter letters in alphabetical order for positions 7, 8, and 9.

For example:

R 1 8 - 0 3 - F 0 G 0