

Electrical Parts


YB Series - Standard Coil Bi-Frequency and UL approved - F Class - IP67

Coil manufactured with H class copper wire, moulded in thermoplastic material polyester with 30% glass fiber, IP67 protection rate. Electrical coection: 2x1000 mm cables.

This coil conforms to the IEC/CENELEC safety standards and complies with European low-voltage directive 73/23/EC.

Voltage tolerances:	-10% to +10% of the nominal voltage (AC), -5% to +10% of the nominal voltage (DC).
Duty:	Continuous duty coil (100%ED).
Weight:	150 g.

Voltage	Power Consumption	Coil Description	Approvals	Ambient Temperature	Class of Insulation	Dimensional Drawing
110-120/50-60	9 W	YB09 110-120/50-60	-	-10°C to +50°C	F Class 155°C	20
220-230/50-60	9 W	YB09 220-230/50-60	IMQ	-10°C to +50°C	F Class 155°C	20
24/50-60	9 W	YB09 24/50-60	-	-10°C to +50°C	F Class 155°C	20
240/50-60	9 W	YB09 240/50-60	-	-10°C to +50°C	F Class 155°C	20
120/60 UR	9 W	YB09 120/60 UR	UL	-10°C to +50°C	F Class 155°C	20
208-240/60 UR	9 W	YB09 208-240/60 UR	UL	-10°C to +50°C	F Class 155°C	20
24/60 UR	9 W	YB09 24/60 UR	UL	-10°C to +50°C	F Class 155°C	20
24DC	12W	YB12 24DC	-	-10°C to +50°C	F Class 155°C	20

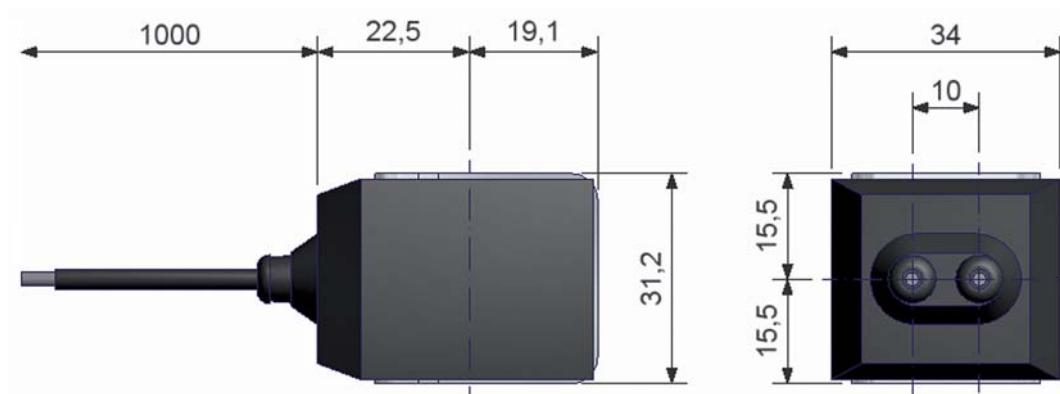

All dimensions are in mm

Dimensional Drawing N° 20