


45° Swept Female BSP Parallel Pipe with O-ring Swivel (DKOR 45°)

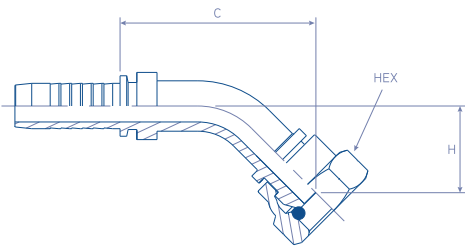

23.3142.

ISO 12151-6 / ISO 8434-6 / BS 5200

REFERENCE	hose dash	hose Ø inch	thread inch	C cut off mm	H mm	HEX mm
23.3142.0404	-4	1/4"	1/4" - 19	33.5	13.0	19
23.3142.0606	-6	3/8"	3/8" - 19	40.0	14.7	22
23.3142.0808	-8	1/2"	1/2" - 14	46.0	18.0	27
23.3142.1010	-10	5/8"	5/8" - 14	60.5	23.3	27
23.3142.1212	-12	3/4"	3/4" - 14	67.5	24.5	32
23.3142.1216	-12	3/4"	1" - 11	70.0	26.0	38
23.3142.1616	-16	1"	1" - 11	83.6	33.8	38
23.3142.1620	-16	1"	1.1/4" - 11	92.3	41.7	50
23.3142.2020	-20	1.1/4"	1.1/4" - 11	97.0	37.5	50
23.3142.2024	-20	1.1/4"	1.1/2" - 11	102.0	42.0	55
23.3142.2424	-24	1.1/2"	1.1/2" - 11	119.0	49.2	55
23.3142.2432	-24	1.1/2"	2" - 11	125.0	55.0	70
23.3142.3232	-32	2"	2" - 11	149.8	60.0	70

MATERIAL: Carbon Steel
FINISH: Chromium-(VI) Free plating /
ROHS compliant

VERSIONS: Stainless Steel (add an 'S'
at the end of the REFERENCE)

NOTES: On larger sizes nuts can be
supplied with Trust-Wire Nut (W)