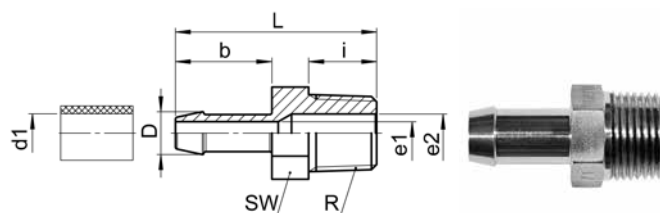


Einschraubtülle R
Douille cannelée à visser R
Male adaptor hose nozzle R

SO 50511

Type -d1 -R	Mat.-Nr.	SW	L	D	i	b	e1	e2	kg/100
R=Rohrgewinde (kegelig)		R=Filetage-gaz BSP (conique)			R=BSP thread (tapered)				
SO 50511-4-1/8	056.0511.060	10	23.0	5.0	8.0	11.0	3.0	6.0	0.560
SO 50511-4-1/4	056.0511.065	14	28.5	5.0	12.0	11.0	3.0	8.5	1.370
SO 50511-6-1/8	056.0511.100	10	29.0	7.5	8.0	17.0	4.0	6.0	0.760
SO 50511-6-1/4	056.0511.110	14	34.5	7.5	12.0	17.0	5.0	8.5	1.460
SO 50511-6-3/8	056.0511.120	17	35.0	7.5	12.0	17.0	5.0	10.5	2.290
SO 50511-6-1/2	056.0511.125	22	40.0	7.5	16.0	17.0	5.0	13.0	4.630
SO 50511-8-1/8	056.0511.160	10	29.0	9.5	8.0	17.0	6.0	6.0	0.850
SO 50511-8-1/4	056.0511.170	14	34.5	9.5	12.0	17.0	6.0	8.5	1.640
SO 50511-8-3/8	056.0511.180	17	35.0	9.5	12.0	17.0	6.0	10.5	2.470
SO 50511-8-1/2	056.0511.185	22	40.0	9.5	16.0	17.0	6.0	13.0	4.800
SO 50511-10-1/4	056.0511.270	14	36.5	11.5	12.0	19.0	8.0	8.0	1.820
SO 50511-10-3/8	056.0511.280	17	37.0	11.5	12.0	19.0	8.0	10.5	2.550
SO 50511-10-1/2	056.0511.285	22	42.0	11.5	16.0	19.0	8.0	13.0	4.910
SO 50511-12,7-1/4	056.0511.380	17	52.0	15.0	12.0	33.0	8.0	8.0	4.260
SO 50511-13-3/8	056.0511.450	17	39.0	15.0	12.0	21.0	11.0	11.0	2.640
SO 50511-13-1/2	056.0511.454	22	44.0	15.0	16.0	21.0	11.0	11.0	5.590
SO 50511-16-1/2	056.0511.566	22	49.0	18.0	16.0	26.0	13.0	13.0	5.720
SO 50511-19-1/2	056.0511.676	22	49.0	21.5	16.0	26.0	16.0	16.0	4.930
SO 50511-19-3/4	056.0511.678	27	51.0	21.5	16.5	26.0	16.0	16.0	9.170
SO 50511-25-1	056.0511.810	36	59.0	27.5	20.0	29.0	22.0	22.0	16.000

d1 = Schlauchinnendurchmesser

d1 = diamètre intérieur du tuyau

d1 = hose inside diameter