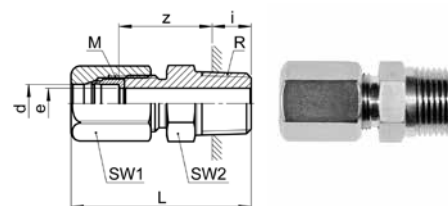


# Gerade Einschraubverschraubung

## Union mâle

## Male adaptor union


**SO 51121**

Type -d-R	Mat.-Nr.	bar	M	SW1	SW2	L	i	z	e	kg/100
Für metrische Rohre	Pour tubes métriques		For metric tubes							
R=Rohrgewinde (kegelig)	R=Filetage-gaz BSP (conique)		R=BSP thread (tapered)							
SO 51121-2-1/8	058.1101.020	250	6x0.75	8	10	22.5	5.0	14.0	1.5	0.800
SO 51121-3-1/8	058.1101.040	250	6x0.75	8	10	24.0	5.0	14.0	2.2	0.860
SO 51121-4-1/8	058.1101.060	250	8x1.0	10	10	26.5	5.0	16.5	3.5	1.320
★ SO 51121-4-1/4	058.1101.065	200	10x1.0	12	14	35.0	8.0	19.0	3.5	2.880
SO 51121-5-1/8	058.1101.082	250	8x1.0	10	10	27.0	5.0	16.0	3.5	1.300
★ SO 51121-5-1/4	058.1101.084	200	10x1.0	12	14	35.0	8.0	19.0	4.0	2.840
SO 51121-6-1/8	058.1101.100	200	10x1.0	12	10	29.0	5.0	16.0	4.5	1.690
SO 51121-6-1/4	058.1101.110	200	10x1.0	12	14	35.0	8.0	19.0	4.5	2.790
SO 51121-6-3/8	058.1101.120	200	10x1.0	12	17	35.0	8.0	19.0	4.5	3.180
SO 51121-6-1/2	058.1101.125	200	10x1.0	12	22	40.0	10.0	22.0	4.5	5.300
SO 51121-8-1/8	058.1101.160	200	12x1.0	14	12	30.5	5.0	17.0	6.0	2.090
SO 51121-8-1/4	058.1101.170	200	12x1.0	14	14	37.0	8.0	20.5	6.5	2.980
SO 51121-8-3/8	058.1101.180	200	12x1.0	14	17	37.0	8.0	20.5	6.5	3.070
SO 51121-8-1/2	058.1101.185	200	12x1.0	14	22	42.0	10.0	23.5	6.5	5.600
SO 51121-10-1/4	058.1101.270	160	14x1.0	17	14	39.5	8.0	20.0	8.5	3.530
SO 51121-10-3/8	058.1101.280	160	14x1.0	17	17	39.5	8.0	20.0	8.5	4.640
SO 51121-10-1/2	058.1101.285	160	14x1.0	17	22	44.5	10.0	23.0	8.5	6.800
SO 51121-10-3/4	058.1101.290	160	14x1.0	17	27	46.5	12.0	23.0	8.5	9.260
SO 51121-12-1/4	058.1101.380	160	16x1.0	19	17	40.0	8.0	20.0	8.5	4.590
SO 51121-12-3/8	058.1101.390	160	16x1.0	19	17	40.0	8.0	20.0	10.0	4.790
SO 51121-12-1/2	058.1101.400	160	16x1.0	19	22	45.0	10.0	23.0	10.0	7.660
★ SO 51121-14-1/2	058.1101.504	100	20x1.5	24	22	49.5	10.0	25.5	12.0	8.800
SO 51121-15-3/8	058.1101.532	100	20x1.5	24	22	44.5	8.0	22.5	10.5	8.840
SO 51121-15-1/2	058.1101.534	100	20x1.5	24	22	49.5	10.0	25.5	13.0	9.030
★ SO 51121-15-3/4	058.1101.536	100	24x1.5	30	27	53.0	12.0	25.5	13.0	14.470
★ SO 51121-16-1/2	058.1101.566	100	24x1.5	30	24	52.0	10.0	26.5	13.5	13.040
★ SO 51121-16-3/4	058.1101.568	100	24x1.5	30	27	53.0	12.0	25.5	14.0	14.220
SO 51121-18-1/2	058.1101.646	100	24x1.5	30	24	52.0	10.0	26.5	13.5	12.540
SO 51121-18-3/4	058.1101.648	100	24x1.5	30	27	53.0	12.0	25.5	15.0	13.720
SO 51121-22-3/4	058.1101.768	64	28x1.5	32	30	56.5	12.0	25.5	19.0	15.490
SO 51121-28-1	058.1101.850	40	36x2.0	41	36	64.5	14.0	31.0	24.0	18.600

Fortsetzung nächste Seite

Suite à la prochaine page


Continued on next page

d=Rohraussen-ø  
 e=kleinste Bohrung  
 L=Mass in montiertem Zustand  
 \*=mit reduziertem Klemmring

d=ø extérieur du tube  
 e=ø-min. de passage  
 L=après montage  
 \*=avec bague de serrage de réduction

d=tube outside diameter  
 e=minimum bore  
 L=installed length  
 \*=with reduction compression ferrule

# Gerade Einschraubverschraubung Union mâle Male adaptor union

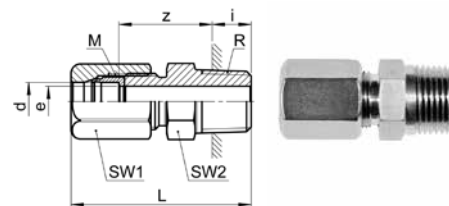
**SO 51121**

Type -d-R	Mat.-Nr.	bar	M	SW1	SW2	L	i	z	e	kg/100
Für Zollrohre	Pour tubes pouces					For inch tubes				
R=Rohrgewinde (kegelig)	R=Filetage-gaz BSP (conique)					R=BSP thread (tapered)				
SO 51121-3,2-1/8	058.1101.045	250	6x0.75	8	10	24.0	5.0	13.0	2.2	0.860
SO 51121-6,35-1/8	058.1101.135	200	10x1.0	12	10	29.0	5.0	16.0	4.5	1.690
SO 51121-6,35-1/4	058.1101.140	200	10x1.0	12	14	35.0	8.0	19.0	4.5	2.790
SO 51121-6,35-3/8	058.1101.145	200	10x1.0	12	17	35.0	8.0	19.0	4.5	3.180
SO 51121-6,35-1/2	058.1101.150	200	10x1.0	12	22	40.0	10.0	22.0	4.5	5.900
SO 51121-9,52-1/4	058.1101.230	160	14x1.0	17	14	34.0	8.0	20.0	8.0	3.560
SO 51121-9,52-3/8	058.1101.235	160	14x1.0	17	17	40.0	8.0	20.0	8.0	4.670
SO 51121-9,52-1/2	058.1101.240	160	14x1.0	17	22	45.0	10.0	23.0	8.0	7.500
SO 51121-12,7-1/2	058.1101.434	160	20x1.5	24	22	49.0	10.0	25.5	11.0	9.030
★ SO 51121-13,5-1/2	058.1101.474	100	20x1.5	24	22	49.5	10.0	25.5	12.0	8.900
★ SO 51121-17,2-1/2	058.1101.616	100	24x1.5	30	24	52.0	10.0	26.5	13.5	12.740
★ SO 51121-17,2-3/4	058.1101.620	100	24x1.5	30	27	53.0	12.0	25.5	15.0	12.920
★ SO 51121-21,3-3/4	058.1101.738	64	28x1.5	32	30	56.5	12.0	25.5	19.0	16.890

Umrechnung für "d" bei Zollrohren:

3,2 = 1/8  
 6,35 = 1/4  
 9,52 = 3/8  
 12,7 = 1/2  
 13,5 = 17/32  
 17,2 = 11/16  
 21,3 = 27/32

Conversion de "d" pour tubes en pouces:

3,2 = 1/8  
 6,35 = 1/4  
 9,52 = 3/8  
 12,7 = 1/2  
 13,5 = 17/32  
 17,2 = 11/16  
 21,3 = 27/32

Conversion for "d" for inch tubes:

3,2 = 1/8  
 6,35 = 1/4  
 9,52 = 3/8  
 12,7 = 1/2  
 13,5 = 17/32  
 17,2 = 11/16  
 21,3 = 27/32