

Gerade Einschraubverschraubung


mit Dichtkante

Union mâle

avec arête d'étanchéité

Male adaptor union

with edge seal

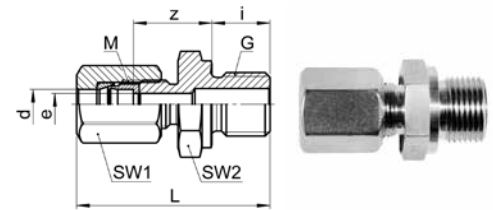

SOL 51124

Type -d-G	Mat.-Nr.	bar	M	SW1	SW2	L	D	i	t	z	e	kg/100
Für metrische Rohre	Pour tubes métriques					For metric tubes						
G=Rohrgewinde (zylindrisch)	G=Filetage-gaz BSP (cylindrique)					G=BSP thread (parallel)						
SOL 51124-6-1/8	078.1141.100	400	10x1.0	14	14	32.5	14.5	8.0	1.0	14.5	4.5	2.900
SOL 51124-6-1/4	078.1141.110	400	10x1.0	14	19	38.0	18.5	12.0	1.5	16.0	4.5	4.400
SOL 51124-6-3/8	078.1141.120	400	10x1.0	14	22	39.5	22.5	12.0	2.0	17.5	4.5	4.400
SOL 51124-6-1/2	078.1141.125	400	10x1.0	14	27	42.0	27.0	14.0	2.5	18.0	4.5	7.600
SOL 51124-8-1/8	078.1141.160	330	12x1.0	17	14	34.0	14.5	8.0	1.0	15.5	5.0	5.200
SOL 51124-8-1/4	078.1141.170	330	12x1.0	17	19	39.5	18.5	12.0	1.5	17.0	6.5	4.400
SOL 51124-8-1/2	078.1141.185	330	12x1.0	17	27	43.5	27.0	14.0	2.5	19.0	6.5	8.200
SOL 51124-10-1/4	078.1141.270	330	14x1.0	19	19	41.5	18.5	12.0	1.5	17.0	7.0	6.000
SOL 51124-10-3/8	078.1141.280	330	14x1.0	19	22	43.0	22.5	12.0	2.0	18.5	8.5	7.500
SOL 51124-10-1/2	078.1141.285	330	14x1.0	19	27	45.5	27.0	14.0	2.5	19.0	8.5	10.300
SOL 51124-10-3/4	078.1141.290	330	14x1.0	19	32	48.5	33.0	16.0	2.5	20.0	8.5	12.600
SOL 51124-12-1/4	078.1141.380	330	16x1.0	22	19	42.5	18.5	12.0	1.5	17.0	7.0	7.600
SOL 51124-12-3/8	078.1141.390	330	16x1.0	22	22	44.0	22.5	12.0	2.0	18.5	10.0	8.400
SOL 51124-12-1/2	078.1141.400	330	16x1.0	22	27	46.5	27.0	14.0	2.5	19.0	10.0	9.900
SOL 51124-12-3/4	078.1141.405	330	16x1.0	22	32	49.5	33.0	16.0	2.5	20.0	10.0	12.100
SOL 51124-15-1/2	078.1141.534	250	20x1.5	27	27	50.5	27.0	14.0	2.5	21.0	13.0	14.000
SOL 51124-16-1/2	078.1141.566	200	24x1.5	30	27	53.5	27.0	14.0	2.5	21.0	13.5	18.200
SOL 51124-16-1	078.1141.570	200	24x1.5	30	41	59.5	40.0	18.0	2.5	23.0	13.5	22.500
SOL 51124-18-1/2	078.1141.646	200	24x1.5	30	27	52.0	27.0	14.0	2.5	21.5	13.5	16.700

Für Zollrohre	Pour tubes pouces					For inch tubes						
SOL 51124-6,35-1/8	078.1141.135	400	10x1.0	14	14	31.5	14.5	8.0	1.0	14.5	4.5	3.000
SOL 51124-6,35-1/4	078.1141.140	400	10x1.0	14	19	38.5	18.5	12.0	1.5	16.0	4.5	3.000
SOL 51124-6,35-3/8	078.1141.145	400	10x1.0	14	22	40.0	22.5	12.0	2.0	17.5	4.5	5.500
SOL 51124-6,35-1/2	078.1141.150	400	10x1.0	14	27	42.5	27.0	14.0	2.5	18.0	4.5	7.700
SOL 51124-9,52-1/4	078.1141.230	330	14x1.0	19	19	41.5	18.5	12.0	1.5	17.0	7.0	6.500
SOL 51124-9,52-3/8	078.1141.235	330	14x1.0	19	22	43.0	22.5	12.0	2.0	18.5	8.0	7.900
SOL 51124-9,52-1/2	078.1141.240	330	14x1.0	19	27	45.5	27.0	14.0	2.5	19.0	8.0	10.800
SOL 51124-12,7-1/2	078.1141.434	330	20x1.5	27	27	50.5	27.0	14.0	2.5	21.5	11.0	15.300
SOL 51124-12,7-3/4	078.1141.536	330	20x1.5	27	32	52.0	33.0	16.0	2.5	22.5	11.0	15.100

Umrechnung für "d" bei Zollrohren:

6,35 = 1/4

9,52 = 3/8

12,7 = 1/2

Conversion de "d" pour tubes en pouces:

6,35 = 1/4

9,52 = 3/8

12,7 = 1/2

Conversion for "d" for inch tubes:

6,35 = 1/4


9,52 = 3/8

12,7 = 1/2

Einbauempfehlung:

Conseil de montage:

Recommendation for installation:

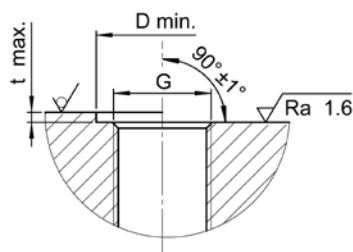

d=Rohraussen-ø
 e=kleinste Bohrung
 L=Mass in montiertem Zustand

d=ø extérieur du tube
 e=ø-min. de passage
 L=après montage

d=tube outside diameter
 e=minimum bore
 L=installed length