

Doppelnippel G


60°-Innenkonus

Mamelon double G

cône intérieur 60°

Male threaded adaptor G

60° inner cone

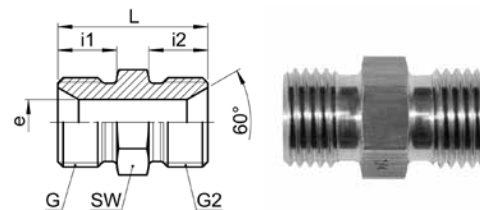


ADH HNC 40

Type -G -G2	Mat.-Nr.	SW	L	i1	i2	e	kg/100
G=Rohrgewinde (zylindrisch)							
G2=Rohrgewinde (zylindrisch)							
ADH HNC 40-1/4-1/4	496.4100.104	14	26.0	10.0	10.0	7.5	1.690
ADH HNC 40-1/4-3/8	496.4100.106	14	27.0	10.0	11.0	7.5	2.330
ADH HNC 40-3/8-3/8	496.4100.166	17	28.0	11.0	11.0	8.5	3.160

Übergangsmuffe G-G

Adaptateur femelle G - femelle G

Female adaptor G-G

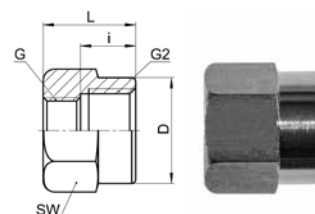

AD FA 40

Type -G -G2	Mat.-Nr.	SW	L	D	i	kg/100
G=Rohrgewinde (zylindrisch)						
G2=Rohrgewinde (zylindrisch)						
AD FA 40-1/8-1/8	016.0311.042	14	16.0	13.8	8.0	1.240
AD FA 40-1/8-1/4	016.0311.044	17	19.0	16.8	9.0	2.170
AD FA 40-1/8-3/8	016.0311.046	22	20.0	21.8	9.5	4.160
AD FA 40-1/8-1/2	016.0311.048	27	22.0	26.8	11.5	6.940
AD FA 40-1/4-1/4	016.0311.104	17	18.0	16.8	9.0	1.710
AD FA 40-1/4-3/8	016.0311.106	22	21.0	21.8	9.5	4.060
AD FA 40-1/4-1/2	016.0311.108	27	23.0	26.8	11.5	6.900
AD FA 40-3/8-3/8	016.0311.166	22	19.0	21.8	9.5	3.090
AD FA 40-3/8-1/2	016.0311.168	27	23.5	26.8	11.5	6.520
AD FA 40-1/2-1/2	016.0311.228	27	23.0	26.8	11.5	5.450
AD FA 40-3/4-3/8	016.0311.286	32	26.5	31.8	9.5	7.830
AD FA 40-3/4-1/2	016.0311.288	32	28.5	31.8	11.5	9.870
AD FA 40-3/4-3/4	016.0311.292	32	28.0	31.8	14.0	7.580