


Übergangsmuffe G-NPT

Adaptateur femelle G - femelle NPT

Female adaptor G-NPT




AD FA 40 NPT

Type -G -RNPT2	Mat.-Nr.	SW	L	D	i	kg/100
G=Rohrgewinde (zylindrisch)	G=Filetage-gaz BSP (cylindrique)		G=BSP thread (parallel)			
RNPT2=NPT Gewinde	RNPT2=Filetage NPT		RNPT2=NPT thread			
AD FA 40-1/8-1/8 NPT	016.0312.042	14	20.0	13.8	10.0	1.340
AD FA 40-1/8-1/4 NPT	016.0312.044	19	22.0	18.8	14.0	3.970
AD FA 40-1/8-3/8 NPT	016.0312.046	22	22.0	21.8	14.0	4.260
AD FA 40-1/4-1/8 NPT	016.0312.102	17	18.5	16.8	7.5	2.710
AD FA 40-1/4-1/4 NPT	016.0312.104	19	25.0	18.8	14.0	4.300
AD FA 40-1/4-3/8 NPT	016.0312.106	22	23.0	21.8	14.0	4.060
AD FA 40-3/8-1/4 NPT	016.0312.164	22	21.0	21.8	9.0	3.670
AD FA 40-3/8-3/8 NPT	016.0312.166	22	26.0	21.8	14.0	4.270
AD FA 40-3/8-1/2 NPT	016.0312.168	27	28.0	26.8	18.0	6.870
AD FA 40-1/2-1/4 NPT	016.0312.224	27	23.0	19.8	9.0	6.030
AD FA 40-1/2-3/8 NPT	016.0312.226	27	24.0	26.8	10.0	6.520
AD FA 40-1/2-1/2 NPT	016.0312.228	27	32.0	26.8	18.0	6.850

Übergangsnippel G-R

Adaptateur femelle G - mâle R

Adaptor female G - male R

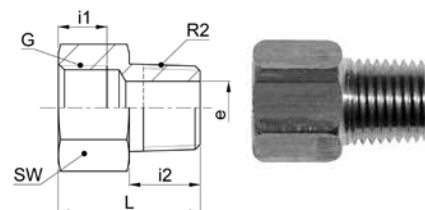

AD A 40 G-R

Type -G -R2	Mat.-Nr.	SW	L	i1	i2	e	kg/100
G=Rohrgewinde (zylindrisch)	G=Filetage-gaz BSP (cylindrique)		G=BSP thread (parallel)				
R2=Rohrgewinde (kegelig)	R2=Filetage-gaz BSP (conique)		R2=BSP thread (tapered)				
AD A 40-1/8-1/8	016.0411.042	14	21.0	8.0	8.0	5.0	2.100
AD A 40-1/8-1/4	016.0411.044	14	17.5	8.0	12.0	8.6	1.060
AD A 40-1/8-3/8	016.0411.046	17	18.0	8.0	12.0	8.6	2.280
AD A 40-1/8-1/2	016.0411.048	22	23.0	9.6	16.0	14.0	3.970
AD A 40-1/4-1/8	016.0411.102	17	21.0	9.0	8.0	5.0	1.630
AD A 40-1/4-1/4	016.0411.104	17	26.0	9.0	12.0	8.5	2.600
AD A 40-1/4-3/8	016.0411.106	17	20.0	9.0	12.0	11.4	1.690
AD A 40-1/4-1/2	016.0411.108	22	23.0	9.7	16.0	14.0	3.590
AD A 40-1/4-3/4	016.0411.110	27	25.5	11.2	16.5	19.0	9.050
AD A 40-3/8-1/8	016.0411.162	22	24.0	9.5	8.0	5.0	3.490
AD A 40-3/8-1/4	016.0411.164	22	27.0	9.5	12.0	8.5	3.180
AD A 40-3/8-3/8	016.0411.166	22	27.0	9.5	12.0	10.5	4.500
AD A 40-3/8-1/2	016.0411.168	22	26.0	9.5	16.0	15.0	2.740
AD A 40-3/8-3/4	016.0411.170	27	25.5	9.5	16.5	14.8	7.510
AD A 40-1/2-1/4	016.0411.224	27	29.0	11.5	12.0	8.5	5.852
AD A 40-1/2-3/8	016.0411.226	27	29.0	11.5	12.0	10.5	5.720
AD A 40-1/2-1/2	016.0411.228	27	32.0	11.5	14.0	13.0	8.200
AD A 40-1/2-3/4	016.0411.232	27	27.5	11.5	16.5	18.6	5.133
AD A 40-1/2-1	016.0411.236	36	31.0	12.5	18.5	24.0	13.100
AD A 40-3/4-3/8	016.0411.286	32	33.5	14.0	12.0	10.5	8.900
AD A 40-3/4-1/2	016.0411.288	32	37.5	14.0	16.0	14.0	11.000
AD A 40-3/4-3/4	016.0411.292	32	38.0	14.0	16.5	19.0	9.400
AD A 40-3/4-1	016.0411.296	36	34.0	14.0	20.0	24.1	13.900