


Gerade Aufschraubverschraubung Union femelle Female adaptor union

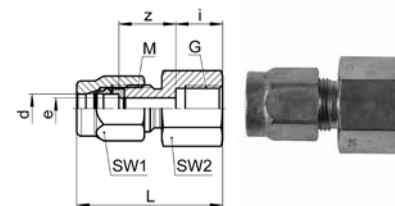

SO 41221

Type -d-G	Mat.-Nr.	bar	M	SW1	SW2	L	i	z	e	kg/100
Für metrische Rohre G=Rohrgewinde (zylindrisch)	Pour tubes métriques G=Filetage-gaz BSP (cylindrique)									
★ SO 41221-3-1/8	018.1201.040	125	8x1.0	10	14	28.5	10.0	12.0	2.5	2.060
SO 41221-4-1/8	018.1201.060	125	8x1.0	10	14	28.0	10.0	12.0	3.4	2.000
★ SO 41221-4-1/4	018.1201.065	125	10x1.0	12	17	31.5	11.0	13.0	3.4	3.110
SO 41221-5-1/8	018.1201.082	125	8x1.0	10	14	28.5	10.0	12.0	3.5	2.000
★ SO 41221-5-1/4	018.1201.084	125	10x1.0	12	17	31.5	11.0	13.0	4.0	3.060
SO 41221-6-1/8	018.1201.100	250	10x1.0	12	14	29.5	10.0	12.0	4.5	2.360
SO 41221-6-1/4	018.1201.110	250	10x1.0	12	17	31.5	11.0	13.0	4.5	3.000
★ SO 41221-6-3/8	018.1201.120	250	12x1.0	14	22	34.0	12.0	14.0	4.5	5.100
★ SO 41221-6-1/2	018.1201.125	250	12x1.0	14	27	36.0	14.0	14.0	4.5	7.400
SO 41221-8-1/8	018.1201.160	150	12x1.0	14	14	31.0	10.0	13.0	6.5	2.790
SO 41221-8-1/4	018.1201.170	150	12x1.0	14	17	33.0	11.0	14.0	6.5	2.430
SO 41221-8-3/8	018.1201.180	150	12x1.0	14	22	34.0	12.0	14.0	6.5	4.940
SO 41221-8-1/2	018.1201.185	150	12x1.0	14	27	36.0	14.0	14.0	6.5	7.300
SO 41221-10-1/4	018.1201.270	125	14x1.0	17	17	35.0	11.0	14.0	8.5	4.180
SO 41221-10-3/8	018.1201.280	125	14x1.0	17	22	36.0	12.0	14.0	8.5	5.900
★ SO 41221-10-1/2	018.1201.285	100	16x1.0	19	27	39.0	14.0	14.0	8.5	9.060
SO 41221-12-1/4	018.1201.380	100	16x1.0	19	17	36.0	11.0	14.0	8.5	4.790
SO 41221-12-3/8	018.1201.390	100	16x1.0	19	22	37.0	12.0	14.0	10.5	6.450
SO 41221-12-1/2	018.1201.400	100	16x1.0	19	27	39.0	14.0	14.0	10.0	8.780
★ SO 41221-12-3/4	018.1201.405	40	20x1.5	24	32	45.5	17.0	16.0	10.0	14.180
★ SO 41221-13-1/2	018.1201.454	40	20x1.5	24	27	45.0	14.0	18.5	11.0	11.950
★ SO 41221-13-3/4	018.1201.456	40	20x1.5	24	32	45.5	17.0	16.0	11.0	14.070
SO 41221-14-1/2	018.1201.504	40	20x1.5	24	27	45.0	14.0	18.5	12.0	11.840
SO 41221-14-3/4	018.1201.506	40	20x1.5	24	32	45.5	17.0	16.0	12.0	13.960
SO 41221-15-1/2	018.1201.534	40	20x1.5	24	27	45.0	14.0	18.5	12.5	11.520
SO 41221-15-3/4	018.1201.536	40	20x1.5	24	32	45.5	17.0	16.0	12.0	13.640
SO 41221-16-1/2	018.1201.566	40	24x1.5	27	27	45.0	10.0	17.0	14.0	13.270
SO 41221-16-3/4	018.1201.568	40	24x1.5	27	32	47.0	17.0	16.0	14.0	15.700
SO 41221-17-1/2	018.1201.596	40	24x1.5	27	27	45.0	14.0	17.0	14.5	13.020
SO 41221-17-3/4	018.1201.598	40	24x1.5	27	32	47.0	17.0	16.0	15.0	15.450
SO 41221-18-1/2	018.1201.646	40	24x1.5	27	27	45.0	14.0	17.0	14.5	12.750
SO 41221-18-3/4	018.1201.648	40	24x1.5	27	32	47.0	17.0	16.0	15.0	15.180
★ SO 41221-19-3/4	018.1201.678	25	28x1.5	32	32	51.5	17.0	17.0	16.0	20.100
SO 41221-22-3/4	018.1201.768	25	28x1.5	32	32	51.5	17.0	17.0	19.0	18.710
SO 41221-28-1	018.1201.850	16	36x2.0	41	41	60.5	20.0	21.0	24.0	38.000

Fortsetzung nächste Seite

Suite à la prochaine page

Continued on next page

d=Rohrassens-ø
 e=kleinste Bohrung
 L=Mass in montiertem Zustand
 *=mit reduziertem Klemmring


d=ø extérieur du tube
 e=ø-min. de passage
 L=après montage
 *=avec bague de serrage de réduction

d=tube outside diameter
 e=minimum bore
 L=installed length
 *=with reduction compression ferrule

Gerade Aufschraubverschraubung

Union femelle

Female adaptor union

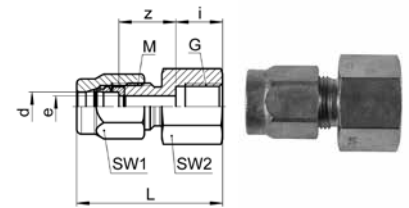

SO 41221

Type -d -G	Mat.-Nr.	bar	M	SW1	SW2	L	i	z	e	kg/100
Für Zollrohre	Pour tubes pouces					For inch tubes				
G=Rohrgewinde (zylindrisch)	G=Filetage-gaz BSP (cylindrique)					G=BSP thread (parallel)				
SO 41221-6,35-1/8	018.1201.135	250	10x1.0	12	14	29.5	10.0	12.0	4.5	2.350
SO 41221-6,35-1/4	018.1201.140	250	10x1.0	12	17	31.5	11.0	13.0	4.5	2.990
SO 41221-9,52-1/4	018.1201.230	125	14x1.0	17	17	35.0	11.0	14.0	8.0	4.240
SO 41221-9,52-3/8	018.1201.235	125	14x1.0	17	22	36.0	12.0	14.0	8.0	4.860
★ SO 41221-12,7-1/2	018.1201.434	40	20x1.5	24	27	45.0	14.0	18.5	11.0	11.950
★ SO 41221-12,7-3/4	018.1201.436	40	20x1.5	24	32	45.5	17.0	16.0	11.0	14.070

Umrechnung für "d" bei Zollrohren:

$$6,35 = 1/4$$

$$9,52 = 3/8$$

$$12,7 = 1/2$$

Conversion de "d" pour tubes en pouces:

$$6,35 = 1/4$$

$$9,52 = 3/8$$

$$12,7 = 1/2$$

Conversion for "d" for inch tubes:

$$6,35 = 1/4$$


$$9,52 = 3/8$$

$$12,7 = 1/2$$

Gerade Aufschraubverschraubung NPT

Union femelle NPT

Female adaptor union NPT

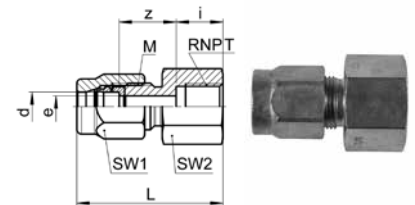

SO 41221 NPT

Type -d -RNPT	Mat.-Nr.	bar	M	SW1	SW2	L	i	z	e	kg/100
Für metrische Rohre	Pour tubes métriques					For metric tubes				
RNPT=NPT Gewinde	RNPT=Filetage NPT					RNPT=NPT thread				
SO 41221-6-1/8 NPT	018.1202.100	250	10x1.0	12	14	29.5	10.0	12.0	4.5	2.360
SO 41221-6-1/4 NPT	018.1202.110	250	10x1.0	12	17	34.0	14.0	12.5	4.5	2.650
★ SO 41221-6-3/8 NPT	018.1202.120	250	12x1.0	14	22	36.0	14.0	14.0	4.5	5.100
★ SO 41221-8-1/4 NPT	018.1202.170	150	14x1.0	17	17	37.0	14.0	13.0	6.5	3.000
SO 41221-8-3/8 NPT	018.1202.180	150	12x1.0	14	22	36.0	14.0	14.0	6.5	5.100
SO 41221-8-1/2 NPT	018.1202.185	150	12x1.0	14	27	40.5	18.0	14.5	6.5	5.900
SO 41221-10-1/4 NPT	018.1202.270	125	14x1.0	17	17	37.0	14.0	13.0	8.5	4.180
★ SO 41221-10-3/8 NPT	018.1202.280	100	16x1.0	19	22	38.0	14.0	14.0	8.5	7.300
★ SO 41221-10-1/2 NPT	018.1202.285	100	16x1.0	19	27	43.5	18.0	14.5	8.5	9.000
SO 41221-12-3/8 NPT	018.1202.390	100	16x1.0	19	22	39.0	14.0	14.0	10.0	8.900
SO 41221-12-1/2 NPT	018.1202.400	100	16x1.0	19	27	43.5	18.0	14.5	10.0	9.000

Für Zollrohre

Pour tubes pouces

For inch tubes

SO 41221-6,35-1/8 NPT	018.1202.135	250	10x1.0	12	14	29.5	10.0	12.0	4.5	2.350
SO 41221-6,35-1/4 NPT	018.1202.140	250	10x1.0	12	17	34.0	14.0	12.5	4.5	2.640
SO 41221-9,52-1/4 NPT	018.1202.230	125	14x1.0	17	17	37.0	14.0	13.0	8.5	4.240

Umrechnung für "d" bei Zollrohren:

$$6,35 = 1/4$$

$$9,52 = 3/8$$

Conversion de "d" pour tubes en pouces:

$$6,35 = 1/4$$

$$9,52 = 3/8$$

Conversion for "d" for inch tubes:

$$6,35 = 1/4$$

$$9,52 = 3/8$$

d=Rohraussen-ø

e=kleinste Bohrung

L=Mass in montiertem Zustand

*=mit reduziertem Klemmring

d=ø extérieur du tube

e=ø-min. de passage

L=après montage

*=avec bague de serrage de réduction

d=tube outside diameter

e=minimum bore

L=installed length

*=with reduction compression ferrule