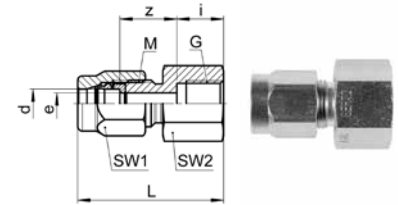


Gerade Aufschraubverschraubung Union femelle Female adaptor union


SO 81221

Type -d-G	Mat.-Nr.	bar	M	SW1	SW2	L	i	z	e	kg/100
G=Rohrgewinde (zylindrisch)			G=Filetage-gaz BSP (cylindrique)			G=BSP thread (parallel)				
* SO 81221-4-1/4	038.1201.065	125	10x1.0	12	17	31.5	11.0	13.0	3.4	3.110
SO 81221-6-1/8	038.1201.100	125	10x1.0	12	14	29.5	10.0	12.0	4.5	2.360
SO 81221-6-1/4	038.1201.110	125	10x1.0	12	17	31.5	11.0	13.0	4.5	3.000
SO 81221-8-1/4	038.1201.170	80	12x1.0	14	17	33.0	11.0	14.0	6.5	2.430
SO 81221-10-1/4	038.1201.270	60	14x1.0	17	17	35.0	11.0	14.0	8.5	4.180
SO 81221-10-3/8	038.1201.280	60	14x1.0	17	22	36.0	12.0	14.0	8.5	5.900
* SO 81221-10-1/2	038.1201.285	60	16x1.0	19	27	39.0	14.0	14.0	8.5	9.060
SO 81221-12-1/4	038.1201.380	40	16x1.0	19	17	36.0	11.0	14.0	8.5	4.790
SO 81221-12-1/2	038.1201.400	40	16x1.0	19	27	39.0	14.0	14.0	10.0	8.780
SO 81221-15-1/2	038.1201.534	25	20x1.5	24	27	45.0	14.0	18.5	12.5	11.520
SO 81221-15-3/4	038.1201.536	25	20x1.5	24	32	45.5	17.0	16.0	13.0	13.640
SO 81221-18-1/2	038.1201.646	25	24x1.5	27	27	45.0	14.0	17.0	14.5	12.750

d=Rohraussen-ø
 e=kleinste Bohrung
 L=Mass in montiertem Zustand
 *=mit reduziertem Klemmring

d=ø extérieur du tube
 e=ø-min. de passage
 L=après montage
 *=avec bague de serrage de reduction

d=tube outside diameter
 e=minimum bore
 L=installed length
 *=with reduction compression ferrule