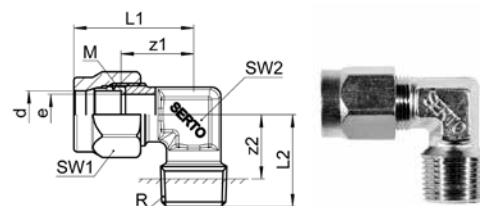


# Winkel-Einschraubverschraubung Coude mâle Male adaptor elbow union

**SO 82421**


Type -d -R	Mat.-Nr.	bar	M	SW1	SW2	L1	L2	z1	z2	e	kg/100
R=Rohrgewinde (kegelig)		R=Filetage-gaz BSP (conique)		R=BSP thread (tapered)							
★ SO 82421-4-1/4	038.2401.065	125	10x1.0	12	10	25.5	22.5	18.0	13.0	3.4	1.800
SO 82421-6-1/8	038.2401.100	125	10x1.0	12	10	23.5	17.5	16.0	12.0	4.5	2.150
SO 82421-6-1/4	038.2401.110	125	10x1.0	12	10	25.5	22.5	18.0	13.0	4.0	2.880
SO 82421-8-1/8	038.2401.160	80	12x1.0	14	10	26.0	18.0	18.0	11.5	6.0	2.540
SO 82421-8-1/4	038.2401.170	80	12x1.0	14	10	26.0	22.5	18.0	13.0	6.0	3.090
★ SO 82421-8-3/8	038.2401.180	80	14x1.0	17	14	30.5	25.0	20.5	15.0	6.5	5.310
SO 82421-10-1/4	038.2401.270	60	14x1.0	17	14	30.5	25.0	20.5	15.5	8.0	4.640
SO 82421-10-3/8	038.2401.280	60	14x1.0	17	14	30.5	25.0	20.5	15.0	8.0	5.110
★ SO 82421-10-1/2	038.2401.285	60	16x1.0	19	19	34.0	29.5	23.0	16.5	8.5	9.020
SO 82421-12-1/4	038.2401.380	40	16x1.0	19	17	32.5	26.0	21.5	16.5	8.0	8.480
SO 82421-12-3/8	038.2401.390	40	16x1.0	19	17	32.5	26.0	21.5	16.0	10.0	6.120
SO 82421-12-1/2	038.2401.400	40	16x1.0	19	19	34.0	29.5	23.0	18.0	10.0	8.710
SO 82421-15-1/2	038.2401.534	25	20x1.5	24	19	36.0	29.5	23.5	18.0	13.0	9.950
SO 82421-18-1/2	038.2401.646	25	24x1.5	27	22	40.5	31.5	26.5	20.0	15.0	12.520

d=Rohraussen-ø  
e=kleinste Bohrung  
L=Mass in montiertem Zustand  
\*=mit reduziertem Klemmring

d=ø extérieur du tube  
e=ø-min. de passage  
L=après montage  
\*=avec bague de serrage de réduction

d=tube outside diameter  
L=installed length  
e=minimum bore  
\*=with reduction compression ferrule