

Winkel-Schottverschraubung

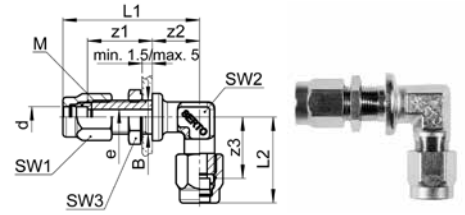
Durchführungslänge max. 5mm

Coude traversée de cloison

pour cloison max. 5 mm

Panel mount elbow union

max. panel thickness 5 mm

SO 82721


Type -d	Mat.-Nr.	bar	M	SW1	SW2	SW3	L1	L2	B	z1	z2	z3	e	kg/100
* SO 82721-4	038.2700.040	125	10x1.0	12	10	14	40.5	25.5	10.5	19.0	14.0	18.0	3.4	4.270
SO 82721-6	038.2700.060	125	10x1.0	12	10	14	40.5	25.5	10.5	19.0	14.0	18.0	4.0	4.160
SO 82721-8	038.2700.080	80	12x1.0	14	11	17	45.0	28.5	12.5	20.0	17.0	20.5	6.0	6.480
SO 82721-10	038.2700.100	60	14x1.0	17	17	19	49.0	33.5	14.5	21.0	18.0	23.5	8.0	9.560
SO 82721-12	038.2700.120	40	16x1.0	19	17	19	50.0	34.5	16.5	21.0	18.0	23.5	10.0	10.640
SO 82721-15	038.2700.150	25	20x1.5	24	19	27	57.0	38.0	20.5	24.5	20.0	25.5	13.0	18.300

Sechskantmutter siehe SO 80006 METR

Ecroû à six pans voir SO 80006 METR

Hexagon nut see SO 80006 METR

d=Rohraussen-ø
e=kleinste Bohrung
L=Mass in montiertem Zustand
*=mit reduziertem Klemmring

d=ø extérieur du tube
e=ø-min. de passage
L=après montage
*=avec bague de serrage de réduction

d=tube outside diameter
e=minimum bore
L=installed length
*=with reduction compression ferrule