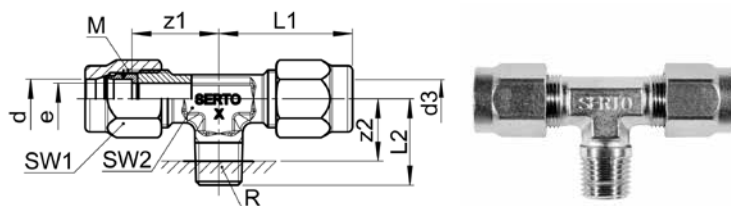


T-Einschraubverschraubung

Té mâle au centre

Male adaptor Tee union


SO 83721 T

Type -d -R -d3	Mat.-Nr.	bar	M	SW1	SW2	L1	L2	z1	z2	e	kg/100
R=Rohrgewinde (kegelig)			R=Filetage-gaz BSP (conique)			R=BSP thread (tapered)					
SO 83721-4-1/8-4	038.3701.040	125	8x1.0	10	10	22.0	17.0	16.0	10.5	3.4	2.350
★ SO 83721-4-1/4-4	038.3701.045	125	10x1.0	12	10	25.5	21.5	18.0	13.0	3.4	4.110
SO 83721-5-1/8-5	038.3701.070	125	8x1.0	10	10	22.5	17.0	16.0	10.5	4.0	2.330
★ SO 83721-5-1/4-5	038.3701.075	125	10x1.0	12	10	25.5	21.5	18.0	13.0	4.0	4.060
SO 83721-6-1/8-6	038.3701.100	125	10x1.0	12	10	23.5	17.5	16.0	11.0	4.0	3.240
SO 83721-6-1/4-6	038.3701.110	125	10x1.0	12	10	25.5	21.5	18.0	13.0	4.0	4.000
SO 83721-8-1/4-8	038.3701.170	80	12x1.0	14	10	26.0	22.5	18.0	13.0	6.0	4.730
SO 83721-10-1/4-10	038.3701.270	60	14x1.0	17	14	30.5	25.0	20.5	15.5	8.0	7.900

d=Rohraussen-ø
 e=kleinste Bohrung
 L=Mass in montiertem Zustand
 *=mit reduziertem Klemmring

d=ø extérieur du tube
 e=ø-min. de passage
 L=après montage
 *=avec bague de serrage de réduction

d=tube outside diameter
 e=minimum bore
 L=installed length
 *=with reduction compression ferrule