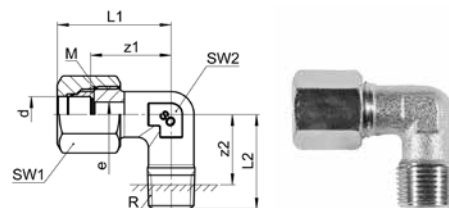


Winkel-Einschraubverschraubung

Coude mâle

Male adaptor elbow union

SO 6092


Type -d-R	Mat.-Nr.	bar	M	SW1	SW2	L1	L2	z1	z2	e	kg/100
R=Rohrgewinde (kegelig)		R=Filetage-gaz BSP (conique)				R=BSP thread (tapered)					
SO 6092-6-1/8	218.2401.100	400	12x1.5	14	12	28.0	20.0	20.0	15.0	5.0	3.100
SO 6092-6-1/4	218.2401.110	400	12x1.5	14	12	30.0	26.0	22.0	18.0	5.0	4.000
SO 6092-8-1/8	218.2401.160	300	14x1.5	17	12	30.0	26.0	22.0	21.0	5.0	4.300
SO 6092-8-1/4	218.2401.170	300	14x1.5	17	12	30.0	26.0	22.0	18.0	6.0	4.600
SO 6092-10-1/4	218.2401.270	250	16x1.5	19	14	32.5	27.0	23.0	19.0	7.0	6.400
SO 6092-10-3/8	218.2401.280	250	16x1.5	19	14	32.5	26.0	23.0	18.0	7.0	8.300
SO 6092-12-3/8	218.2401.390	250	18x1.5	22	17	37.0	28.0	25.0	20.0	9.0	8.600
SO 6092-14-3/8	218.2401.502	250	22x1.5	27	19	42.0	32.0	29.0	24.0	11.0	14.500
SO 6092-14-1/2	218.2401.504	250	22x1.5	27	19	42.0	32.0	29.0	22.0	11.0	15.600
SO 6092-15-3/8	218.2401.532	200	22x1.5	27	19	42.0	32.0	29.0	24.0	11.0	14.500
SO 6092-15-1/2	218.2401.534	200	22x1.5	27	19	42.0	32.0	29.0	22.0	11.0	15.600
SO 6092-16-1/2	218.2401.566	200	24x1.5	30	22	46.0	35.0	31.0	25.0	12.0	19.600
SO 6092-18-1/2	218.2401.646	200	26x1.5	32	24	48.0	36.0	32.0	26.0	14.0	21.700
SO 6092-18-3/4	218.2401.648	200	26x1.5	32	24	48.0	35.0	32.0	23.0	14.0	24.800
SO 6092-20-1/2	218.2401.706	200	26x1.5	32	24	50.0	36.0	33.0	26.0	14.0	21.700
SO 6092-20-3/4	218.2401.708	200	26x1.5	32	24	50.0	35.0	33.0	23.0	14.0	24.810
SO 6092-22-3/4	218.2401.768	160	30x2.0	32	27	51.0	39.0	37.0	27.0	19.0	28.800
SO 6092-25-1	218.2401.810	160	33x2.0	41	30	57.0	44.0	40.0	30.0	20.0	43.900
SO 6092-28-1	218.2401.850	160	36x2.0	41	30	56.0	46.0	40.0	32.0	24.0	39.400