


Gerade Aufschraubverschraubung Union femelle Female adaptor union

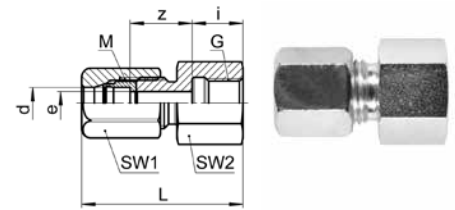


SO 6332

Type -d-G	Mat.-Nr.	bar	M	SW1	SW2	L	i	z	e	kg/100
G=Rohrgewinde (zylindrisch)	G=Filetage-gaz BSP (cylindrique)		G=BSP thread (parallel)							
SO 6332-6-1/8	218.1201.100	400	12x1.5	14	14	32.0	10.0	14.0	5.2	2.500
SO 6332-6-1/4	218.1201.110	400	12x1.5	14	19	34.0	11.0	15.0	5.2	4.200
SO 6332-6-3/8	218.1201.120	400	12x1.5	14	22	35.0	12.0	15.0	5.2	4.800
SO 6332-6-1/2	218.1201.125	400	12x1.5	14	27	41.0	14.0	19.0	5.2	8.700
SO 6332-8-1/4	218.1201.170	300	14x1.5	17	19	34.0	11.0	15.0	6.2	4.700
SO 6332-8-1/2	218.1201.185	300	14x1.5	17	27	37.0	14.0	15.0	6.2	6.900
SO 6332-10-1/4	218.1201.270	250	16x1.5	19	19	37.0	11.0	16.0	8.2	6.100
SO 6332-10-3/8	218.1201.280	250	16x1.5	19	22	38.0	12.0	16.0	8.2	6.800
SO 6332-10-1/2	218.1201.285	250	16x1.5	19	27	40.0	14.0	16.0	8.2	8.400
SO 6332-12-1/4	218.1201.380	250	18x1.5	22	19	39.0	11.0	16.0	8.2	7.700
SO 6332-12-3/8	218.1201.390	250	18x1.5	22	22	40.0	12.0	16.0	10.2	7.900
SO 6332-12-1/2	218.1201.400	250	18x1.5	22	27	42.0	14.0	16.0	10.2	9.500
SO 6332-14-1/2	218.1201.504	250	22x1.5	27	27	44.0	14.0	17.0	12.5	13.200
SO 6332-15-1/2	218.1201.534	200	22x1.5	27	27	44.0	14.0	17.0	12.5	13.200
SO 6332-16-1/2	218.1201.566	200	24x1.5	30	27	46.0	14.0	17.0	14.0	15.600
SO 6332-18-1/2	218.1201.646	200	26x1.5	32	27	48.0	14.0	18.0	14.0	17.500
SO 6332-18-3/4	218.1201.648	200	26x1.5	32	32	52.0	17.0	19.0	16.0	19.100
SO 6332-20-1/2	218.1201.706	200	26x1.5	32	27	49.5	14.0	18.5	14.0	17.500
SO 6332-20-3/4	218.1201.708	200	26x1.5	32	32	53.5	17.0	19.5	16.0	19.100
SO 6332-22-3/4	218.1201.768	160	30x2.0	36	32	52.0	17.0	21.0	18.0	23.000
SO 6332-25-1	218.1201.810	160	33x2.0	41	41	60.0	20.0	23.0	22.0	36.900
SO 6332-28-1	218.1201.850	160	36x2.0	41	41	59.0	20.0	23.0	23.0	30.200
SO 6332-30-1	218.1201.900	160	39x2.0	46	41	63.0	20.0	25.0	25.0	35.890

Anwendungsbeispiele:

Exemples d'utilisation:

Sample combinations:



d=Rohraussen-ø
 e=kleinste Bohrung
 L=Mass in montiertem Zustand

d=ø extérieur du tube
 e=ø-min. de passage
 L=après montage

d=tube outside diameter
 e=minimum bore
 L=installed length