

Gerade Einschraubverschraubung

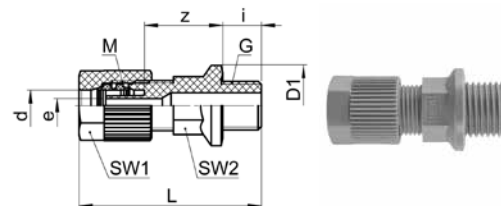
mit Dichtkante

Union mâle

avec arête d'étanchéité

Male adapter union

with edge seal


SO 31124

Type -d-G	Mat.-Nr.	bar +	M	SW1	SW2	L	D1	D2	i	t	z	e	kg/100
G=Rohrgewinde (zylindrisch)	G=Filetage-gaz BSP (cylindrique)		G=BSP thread (parallel)										
SO 31124-6-1/8	168.1161.100	10	10x1.0	12	10	34.5	16.0	16.5	8.0	3.5	15.5	2.8	0.577
SO 31124-6-1/4	168.1161.110	10	10x1.0	12	13	36.5	19.0	19.5	10.0	3.5	15.5	2.8	0.746
SO 31124-8-1/8	168.1161.160	10	12x1.0	14	10	36.5	16.0	16.5	8.0	3.5	15.5	4.8	0.690
SO 31124-8-1/4	168.1161.170	10	12x1.0	14	13	38.5	19.0	19.5	10.0	3.5	15.5	4.8	0.846
SO 31124-10-1/4	168.1161.270	10	14x1.0	17	13	39.0	19.5	20.0	10.0	3.5	15.0	6.6	1.097
SO 31124-10-3/8	168.1161.280	10	14x1.0	17	17	40.0	23.5	24.0	10.0	4.0	16.0	6.6	1.398
SO 31124-12-1/4	168.1161.380	10	16x1.0	19	13	41.5	19.5	20.0	10.0	3.5	14.0	8.0	1.317
SO 31124-12-3/8	168.1161.390	10	16x1.0	19	17	42.5	23.0	23.5	10.0	4.0	15.0	8.0	1.632

Einbauempfehlung:

Conseil de montage:

Recommendation for installation:

