

Gerade Einschraubverschraubung UNJF


mit O-Ringabdichtung (NBR)

Union mâle UNJF

avec joint torique (NBR)

Male adapter union UNJF

with O-Ring seal (NBR)

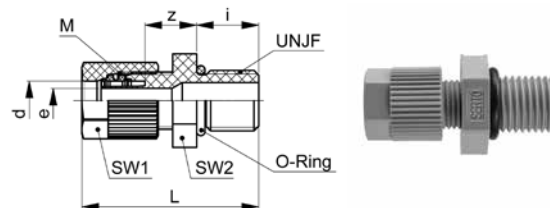


SO 31124 OR UNJF

Type -d -UNJF	Mat.-Nr.	bar +	M	SW1	SW2	L	D	i	t	O-Ring	z	e	kg/100
UNJF=Feingewinde (zylindrisch)	UNJF=Filetage fin (cylindrique)			UNJF=Fine thread (parallel)									
SO 31124-6-7/16 UNJF OR	168.1178.122	10	10x1.0	12	17	35.0	21.0	13.0	1.0	9.25x1.78	11.0	2.8	0.500
SO 31124-6-3/8 UNJF OR	168.1178.126	10	10x1.0	12	17	35.0	21.0	13.0	1.0	12.0x2.0	11.0	2.8	0.500

Einbauempfehlung:

Conseil de montage:

Recommendation for installation:

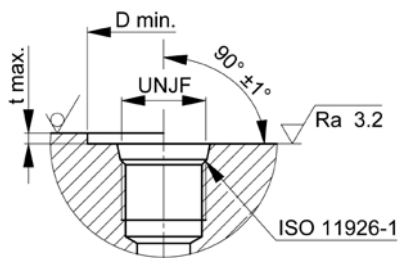

Einsatztemperaturbereich: -30°C bis +80°C

Plage de température de service: -30°C à +80°C

Operating temperature range: -30°C to +80°C