


## Aufschraubverbindung kegelig

## Union femelle conique

## Female connector tapered

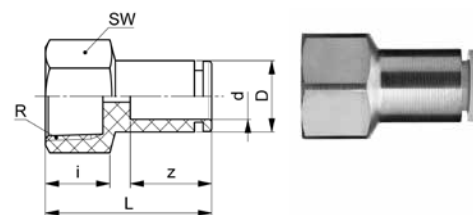


### FP 31250

Type -d-R	Mat.-Nr.	SW	L	D	i	z	g/Stk
R=Rohrgewinde (kegelig)	R=Filetage-gaz BSP (conique)	R=BSP thread (tapered)					
FP 31250-4-1/8	TFP.312.0411	14	24.0	8.0	8.5	13.3	12
FP 31250-4-1/4	TFP.312.0412	17	29.0	8.0	13.0	13.3	22
FP 31250-6-1/8	TFP.312.0611	14	23.5	10.0	8.5	13.3	12
FP 31250-6-1/4	TFP.312.0612	17	28.5	10.0	13.0	13.3	22
FP 31250-6-3/8	TFP.312.0613	19	30.0	10.0	12.7	13.3	23
FP 31250-8-1/8	TFP.312.0811	14	24.0	13.0	8.5	14.2	13
FP 31250-8-1/4	TFP.312.0812	17	29.0	13.0	12.2	14.2	22
FP 31250-8-3/8	TFP.312.0813	19	30.5	13.0	13.5	14.2	31
FP 31250-10-1/4	TFP.312.1012	17	30.0	15.5	13.0	15.6	24
FP 31250-10-3/8	TFP.312.1013	19	31.3	15.5	13.3	15.6	26
FP 31250-12-1/4	TFP.312.1212	19	31.0	18.0	12.0	17.0	33
FP 31250-12-3/8	TFP.312.1213	19	32.3	18.0	13.3	17.0	28
FP 31250-12-1/2	TFP.312.1214	24	36.3	18.0	16.0	17.0	46

## Gerade Schottverbindung

## Union double traversée de cloison

## Panel mount connector

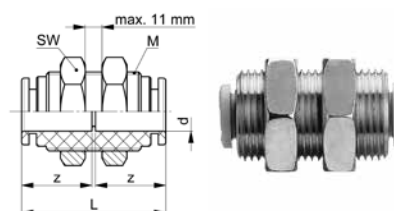

### FP 31550

Type -d	Mat.-Nr.	M	SW	L	z	g/Stk
FP 31550-4	TFP.315.0400	12x1.0	14	27.5	13.3	23
FP 31550-6	TFP.315.0600	14x1.0	17	27.5	13.3	28
FP 31550-8	TFP.315.0800	16x1.0	19	29.0	14.2	34
FP 31550-10	TFP.315.1000	20x1.0	24	32.0	15.6	64
FP 31550-12	TFP.315.1200	22x1.0	27	34.5	17.0	64