


Einschraubwinkel

Coude mâle

Male elbow connector

FP 32450

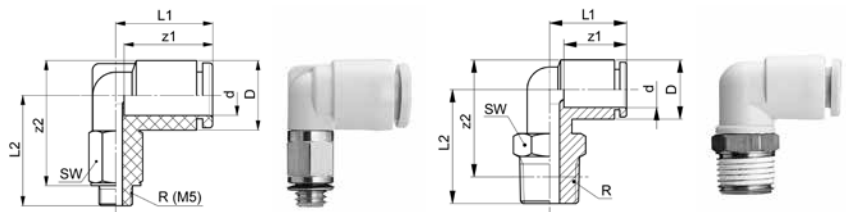


Type -d -R	Mat.-Nr.	SW	L1	L2	D	z1	z2	g/Stk
R=Rohrgewinde (kegelig)	R=Filetage-gaz BSP (conique)		R=BSP thread (tapered)					
FP 32450-4-M5	TFP.324.0441	7	15.4	14.7	8.2	13.3	15.9	3
FP 32450-6-M5	TFP.324.0641	7	14.5	16.5	10.4	13.3	18.7	3
FP 32450-4-1/8	TFP.324.0411	10	14.7	16.2	8.2	13.3	17.3	5
FP 32450-4-1/4	TFP.324.0412	14	14.7	21.7	8.2	13.3	21.0	14
FP 32450-6-1/8	TFP.324.0611	10	15.5	17.3	10.4	13.3	19.4	5
FP 32450-6-1/4	TFP.324.0612	14	15.5	22.8	10.4	13.3	23.3	15
FP 32450-6-3/8	TFP.324.0613	17	15.5	24.2	10.4	13.3	24.2	27
FP 32450-8-1/8	TFP.324.0811	10	16.5	18.7	13.3	14.2	22.1	6
FP 32450-8-1/4	TFP.324.0812	14	17.2	25.5	13.3	14.2	27.3	18
FP 32450-8-3/8	TFP.324.0813	17	17.2	25.5	13.3	14.2	27.0	25
FP 32450-10-1/4	TFP.324.1012	17	19.3	28.7	15.9	15.6	32.0	22
FP 32450-10-3/8	TFP.324.1013	17	19.3	29.6	15.9	15.6	32.5	22
FP 32450-12-1/4	TFP.324.1212	17	21.5	30.0	18.5	17.0	34.5	24
FP 32450-12-3/8	TFP.324.1213	17	21.5	30.8	18.5	17.0	35.0	24
FP 32450-12-1/2	TFP.324.1214	22	21.5	35.0	18.5	17.0	37.8	47

Einschraubwinkel lang

Coude mâle long

Male elbow connector long

FP 32550

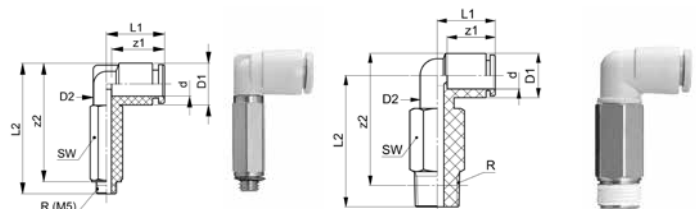

Type -d -R	Mat.-Nr.	SW	L1	L2	D1	D2	z1	z2	g/Stk
R=Rohrgewinde (kegelig)	R=Filetage-gaz BSP (conique)		R=BSP thread (tapered)						
FP 32550-4-M5	TFP.325.0441	7	15.4	25.7	8.2	7.0	13.3	26.8	6
FP 32550-6-M5	TFP.325.0641	7	14.5	27.5	10.4	7.0	13.3	29.5	6
FP 32550-4-1/8	TFP.325.0411	10	14.7	30.0	8.2	10.0	13.3	31.0	11
FP 32550-6-1/8	TFP.325.0611	10	15.5	31.0	10.4	10.0	13.3	33.0	12
FP 32550-6-1/4	TFP.325.0612	14	15.5	34.4	10.4	10.0	13.3	35.0	28
FP 32550-8-1/8	TFP.325.0811	10	16.5	32.4	13.3	10.0	14.2	36.0	12
FP 32550-8-1/4	TFP.325.0812	14	17.2	39.0	13.3	12.0	14.2	41.0	40
FP 32550-10-1/4	TFP.325.1012	17	19.3	53.0	15.9	17.0	15.6	56.2	59
FP 32550-10-3/8	TFP.325.1013	17	19.3	48.5	15.9	17.0	15.6	51.5	51
FP 32550-12-1/4	TFP.325.1212	17	21.5	54.2	18.5	17.0	17.0	58.8	61
FP 32550-12-3/8	TFP.325.1213	17	21.5	49.8	18.5	17.0	17.0	54.0	53