


Einschraubverbindung drehbar

Union mâle rotatif

Male connector swivelling

FP 31950

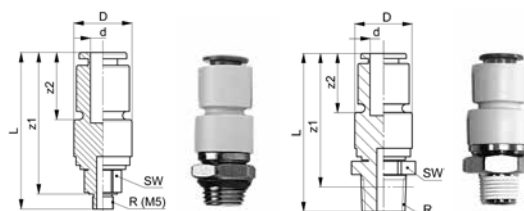


Type -d -R	Mat.-Nr.	SW	L	D	z1	z2	g/Stk
R=Rohrgewinde (kegelig)	R=Filetage-gaz BSP (conique)		R=BSP thread (tapered)				
FP 31950-4 M5	TFP.319.0441	8	36.5	12.0	33.0	16.0	9
FP 31950-6 M5	TFP.319.0641	8	37.5	14.0	33.5	17.0	12
FP 31950-4-1/8	TFP.319.0411	12	37.0	12.0	34.0	16.0	14
FP 31950-6-1/8	TFP.319.0611	14	38.5	14.0	35.5	17.0	17
FP 31950-6-1/4	TFP.319.0612	14	42.0	14.0	36.5	17.0	23
FP 31950-8-1/8	TFP.319.0811	17	43.0	17.0	40.0	18.5	23
FP 31950-8-1/4	TFP.319.0812	17	46.5	17.0	41.0	18.5	29
FP 31950-8-3/8	TFP.319.0813	17	47.0	17.0	41.5	18.5	37
FP 31950-10-1/4	TFP.319.1012	22	53.5	22.0	48.0	21.0	55
FP 31950-10-3/8	TFP.319.1013	22	54.0	22.0	48.5	21.0	63
FP 31950-10-1/2	TFP.319.1014	22	56.5	22.0	49.5	21.0	81
FP 31950-12-3/8	TFP.319.1213	24	56.0	24.0	50.5	22.0	75
FP 31950-12-1/2	TFP.319.1214	24	60.0	24.0	52.0	22.0	92

Einschraubwinkel drehbar

Coude mâle rotatif

Male elbow connector swivelling

FP 32950

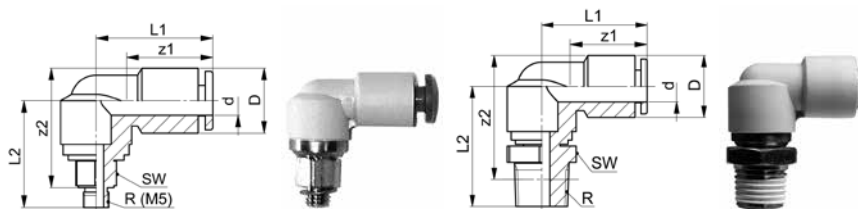

Type -d -R	Mat.-Nr.	SW	L1	L2	D	z1	z2	g/Stk
R=Rohrgewinde (kegelig)	R=Filetage-gaz BSP (conique)		R=BSP thread (tapered)					
FP 32950-4-M5	TFP.329.0441	8	21.0	20.5	10.4	16.0	22.0	9
FP 32950-6 M5	TFP.329.0641	8	23.0	21.0	12.8	17.0	23.5	12
FP 32950-4-1/8	TFP.329.0411	12	21.0	21.0	10.4	16.0	23.5	14
FP 32950-6-1/8	TFP.329.0611	14	23.0	22.0	12.8	17.0	25.5	17
FP 32950-6-1/4	TFP.329.0612	14	23.0	25.5	12.8	17.0	26.5	23
FP 32950-8-1/8	TFP.329.0811	17	26.0	25.5	15.2	18.5	30.0	23
FP 32950-8-1/4	TFP.329.0812	17	26.0	29.0	15.2	18.5	31.0	29
FP 32950-8-3/8	TFP.329.0813	17	26.0	30.0	15.2	18.5	32.0	38
FP 32950-10-1/4	TFP.329.1012	22	31.5	33.5	18.5	21.0	37.5	56
FP 32950-10-3/8	TFP.329.1013	22	31.5	34.0	18.5	21.0	38.0	64
FP 32950-12-3/8	TFP.329.1213	24	34.0	37.0	21.0	22.0	40.5	76
FP 32950-12-1/2	TFP.329.1214	24	34.0	38.5	21.0	22.0	42.0	93