

Kuppler mit Innengewinde


absperrend

Coupleur avec taraudage

obturant

Coupler with female thread

shut-off

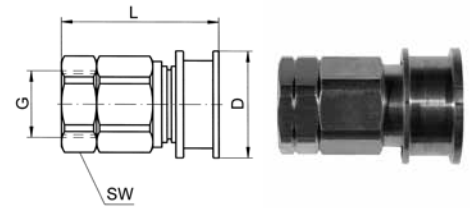

B-VEAC

Type -G	Mat.-Nr.	bar	SW	L	D	kg/100
G=Rohrgewinde (zylindrisch)	G=Filetage-gaz BSP (cylindrique)			G=BSP thread (parallel)		
B-VEAC4-G $\frac{1}{4}$ i	YBD.EA42.1040	100	22	42.0	28.8	10.800
B-VEAC6-G $\frac{3}{8}$ i	YBD.EA42.1060	100	25	48.0	33.3	15.700
B-VEAC8-G $\frac{1}{2}$ i	YBD.EA42.1080	100	30	53.0	36.5	19.000
B-VEAC12-G $\frac{3}{4}$ i	YBD.EA42.1090	100	38	61.5	47.6	21.000
B-VEAC16-G1i	YBD.OE42.1100	35	47	67.8	55.5	33.800

Stecker mit Innengewinde


absperrend

Embout avec taraudage

obturant

Nipple with female thread

shut-off

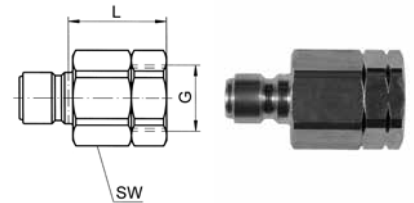

B-VEAN

Type -G	Mat.-Nr.	bar	SW	L	kg/100
G=Rohrgewinde (zylindrisch)	G=Filetage-gaz BSP (cylindrique)			G=BSP thread (parallel)	
B-VEAN4-G $\frac{1}{4}$ i	YBD.EA44.1040	100	22	25.4	7.000
B-VEAN6-G $\frac{3}{8}$ i	YBD.EA44.1060	100	25	29.0	10.500
B-VEAN8-G $\frac{1}{2}$ i	YBD.EA44.1080	100	30	34.5	15.500
B-VEAN12-G $\frac{3}{4}$ i	YBD.EA44.1090	100	38	35.6	27.000
B-VEAN16-G1i	YBD.OE44.1100	35	47	43.4	45.300