

Kuppler mit Innengewinde


nicht absperrend

Coupleur avec taraudage

non-obturant

Coupler with female thread

no shut-off

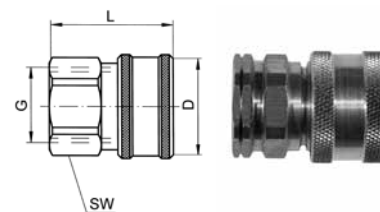

B-PHC

Type -G	Mat.-Nr.	bar	SW	L	D	kg/100
G=Rohrgewinde (zylindrisch)	G=Filetage-gaz BSP (cylindrique)			G=BSP thread (parallel)		
B-PHC4-G $\frac{1}{4}$ i	YBD.OH41.1040	280	22	34.0	25.4	7.700
B-PHC6-G $\frac{3}{8}$ i	YBD.OH41.1060	280	25	38.1	30.2	11.500
B-PHC8-G $\frac{1}{2}$ i	YBD.OH41.1080	280	30	41.2	35.3	15.500
B-PHC12-G $\frac{3}{4}$ i	YBD.OH41.1090	245	38	48.5	41.4	25.000
B-PHC16-G1i	YBD.OH41.1100	210	47	52.6	50.8	41.800

Kuppler mit Innengewinde


absperrend

Coupleur avec taraudage

obturant

Coupler with female thread

shut-off

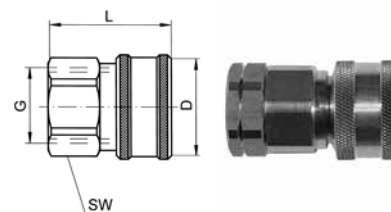

B-VHC

Type -G	Mat.-Nr.	bar	SW	L	D	kg/100
G=Rohrgewinde (zylindrisch)	G=Filetage-gaz BSP (cylindrique)			G=BSP thread (parallel)		
B-VHC4-G $\frac{1}{4}$ i	YBD.OH42.1040	155	22	41.9	25.4	10.700
B-VHC6-G $\frac{3}{8}$ i	YBD.OH42.1060	155	25	48.3	30.2	15.600
B-VHC8-G $\frac{1}{2}$ i	YBD.OH42.1080	140	30	53.1	35.3	21.800
B-VHC12-G $\frac{3}{4}$ i	YBD.OH42.1090	140	38	61.5	41.4	37.000
B-VHC16-G1i	YBD.OH42.1100	125	47	67.8	50.8	60.700

Kuppler mit Innengewinde NPT


absperrend

Coupleur avec taraudage NPT

obturant

Coupler with female thread NPT

shut-off

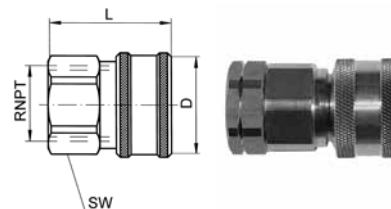

B-VHC-NPT

Type -RNPT	Mat.-Nr.	bar	SW	L	D	kg/100
RNPT=NPT Gewinde	RNPT=Filetage NPT			RNPT=NPT thread		
B-VHC4- $\frac{1}{4}$ NPSi	YBD.OH42.2040	155	22	41.9	25.4	9.400