

Kuppler mit Schlauchtülle

absperrend


Coupleur avec douille cannelée pour tuyau

obturant

Coupler with hose nozzle

shut-off

CO KA 201

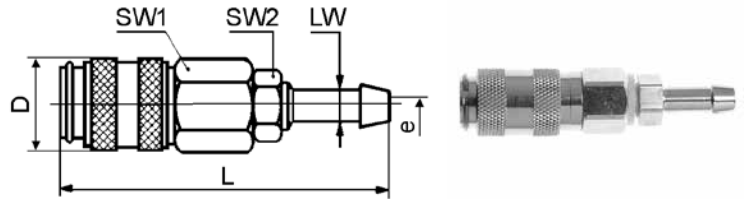

Type -LW	Mat.-Nr.	bar	SW1	SW2	L	D	e	kg/100
CO KA 201-LW 2 N	334.2040.020	35	9	7	38.0	10.0	1.5	1.200
CO KA 201-LW 2,5 N	334.2040.025	35	9	7	39.0	10.0	2.0	1.200
CO KA 201-LW 3 N	334.2040.030	35	9	7	40.0	10.0	2.0	1.200
CO KA 201-LW 4 N	334.2040.040	35	9	7	41.0	10.0	2.7	1.300

Kuppler mit Innengewinde

absperrend


Coupleur avec taraudage

obturant

Coupler with female thread

shut-off

CO KA 202

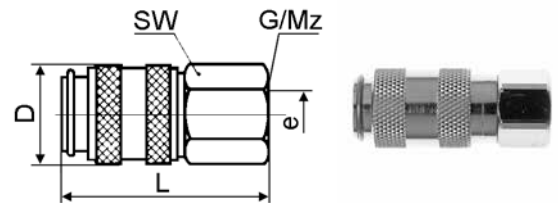

Type -G / -Mz	Mat.-Nr.	bar	SW	L	D	e	kg/100
G=Rohrgewinde (zylindrisch)	G=Filetage-gaz BSP (cylindrique)	G=BSP thread (parallel)					
Mz=metrisches Gewinde (zylindrisch)	Mz=Filetage métrique (cylindrique)	Mz=Metric thread (parallel)					
CO KA 202-G $\frac{1}{8}$ N	334.2060.020	35	12	28.0	10.0	2.7	1.400
CO KA 202-M5 N	334.2070.080	35	9	26.0	10.0	2.7	1.000