

Kuppler mit Schlauchtülle

absperrend


Coupleur avec douille cannelée pour tuyau

obturant

Coupler with hose nozzle

shut-off

CO KA 211

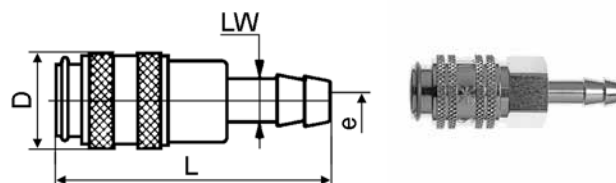

Type -LW	Mat.-Nr.	bar	L	D	e	kg/100
CO KA 211-LW 4 N	334.2540.040	35	46.0	16.0	2.0	2.500
CO KA 211-LW 6 N	334.2540.060	35	46.0	16.0	4.0	2.600
CO KA 211-LW 8 N	334.2540.080	35	46.0	16.0	6.0	2.700
CO KA 211-LW 9 N	334.2540.090	35	46.0	16.0	6.0	2.800
CO KA 211-LW10 N	334.2540.100	35	46.0	16.0	6.0	2.900

Kuppler mit Innengewinde

absperrend


Coupleur avec taraudage

obturant

Coupler with female thread

shut-off

CO KA 212

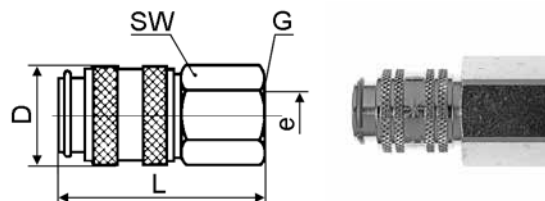

Type -G	Mat.-Nr.	bar	SW	L	D	e	kg/100
G=Rohrgewinde (zylindrisch)	G=Filetage-gaz BSP (cylindrique)		G=BSP thread (parallel)				
CO KA 212-G $\frac{1}{8}$ N	334.2560.020	35	14	36.0	16.0	5.0	2.900
CO KA 212-G $\frac{1}{4}$ N	334.2560.040	35	17	38.0	16.0	5.0	3.400
CO KA 212-G $\frac{3}{8}$ N	334.2560.060	35	19	38.0	16.0	5.0	4.300