

## Kuppler mit Schlauchtülle

absperrend


## Coupleur avec douille cannelée pour tuyau

obturant

## Coupler with hose nozzle

shut-off

### CO KA 221

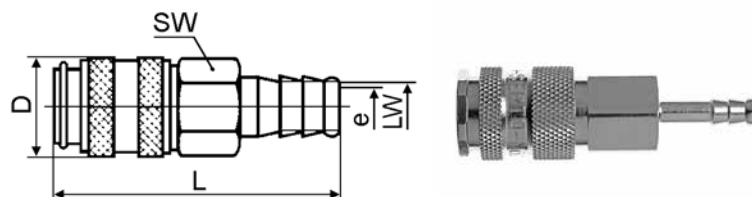

Type -LW	Mat.-Nr.	bar	SW	L	D	e	kg/100
CO KA 221-LW 6 N	334.3040.060	35	19	74.0	23.0	5.0	8.200
CO KA 221-LW 8 N	334.3040.080	35	19	74.0	23.0	5.5	8.400
CO KA 221-LW 10 N	334.3040.100	35	19	74.0	23.0	5.5	8.500

## Kuppler mit Innengewinde

absperrend


## Coupleur avec taraudage

obturant

## Coupler with female thread

shut-off

### CO KA 222

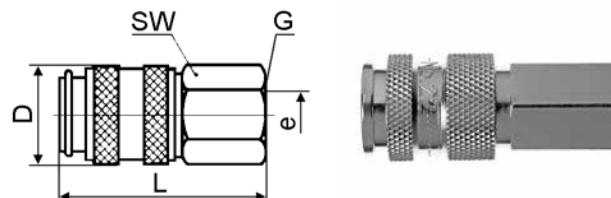

Type -G	Mat.-Nr.	bar	SW	L	D	e	kg/100
G=Rohrgewinde (zylindrisch)	G=Filetage-gaz BSP (cylindrique)	G=BSP thread (parallel)					
CO KA 222-G 1/4 N	334.3060.040	35	19	56.0	23.0	5.5	9.400
CO KA 222-G 3/8 N	334.3060.060	35	19	55.0	23.0	5.5	8.600
CO KA 222-G 1/2 N	334.3060.080	35	24	58.0	23.0	5.5	11.800

## Kuppler mit Aussengewinde

absperrend


## Coupleur avec filetage

obturant

## Coupler with male thread

shut-off

### CO KA 223

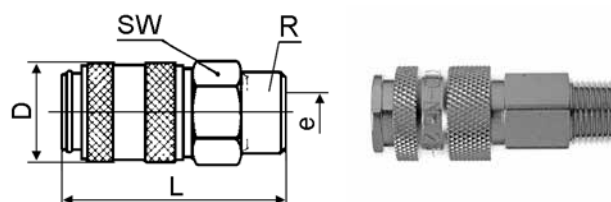

Type -R	Mat.-Nr.	bar	SW	L	D	e	kg/100
R=Rohrgewinde (kegelig)	R=Filetage-gaz BSP (conique)	R=BSP thread (tapered)					
CO KA 223-R 1/4 N	334.3080.040	35	19	61.0	23.0	5.5	9.000
CO KA 223-R 3/8 N	334.3080.060	35	19	61.0	23.0	5.5	9.200
CO KA 223-R 1/2 N	334.3080.080	35	22	66.0	23.0	5.5	11.700