

Kuppler mit Schlauchtülle

absperrend


Coupleur avec douille cannelée

obturant

Coupler with hose nozzle

shut-off

CO KA 211 (P)

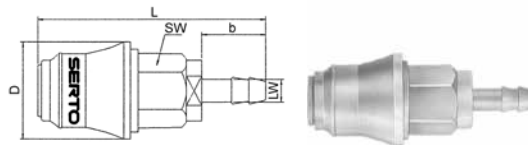

Type -LW	Mat.-Nr.	bar	SW	L	b	D	kg/100
CO KA 211-LW 4 P	302.8110.040	8	17	60.0	17.0	25.5	1.510
CO KA 211-LW 6 P	302.8110.060	8	17	60.0	17.0	25.5	1.580

Kuppler mit Innengewinde

absperrend


Coupleur avec taraudage

obturant

Coupler with female thread

shut-off

CO KA 212 (P)



Type -G	Mat.-Nr.	bar	SW	L1	L2	D	kg/100
G=Rohrgewinde (zylindrisch)	G=Filetage-gaz BSP (cylindrique)				G=BSP thread (parallel)		
CO KA 212-G 1/8 P	302.8120.020	8	17	53.0	8.0	25.5	1.300
CO KA 212-G 1/4 P	302.8120.040	8	17	39.0	9.0	25.5	1.030

Kuppler mit Aussengewinde

absperrend


Coupleur avec filetage

obturant

Coupler with male thread

shut-off

CO KA 213 (P)

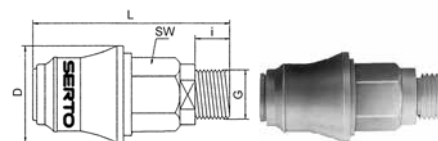

Type -G	Mat.-Nr.	bar	SW	L	i	D	kg/100
G=Rohrgewinde (zylindrisch)	G=Filetage-gaz BSP (cylindrique)				G=BSP thread (parallel)		
CO KA 213-G 1/8 P	302.8130.020	8	17	50.0	7.0	25.5	1.530
CO KA 213-G 1/4 P	302.8130.040	8	17	52.0	7.0	25.5	1.570