


# PETROCONN GRECATO SP MULTIPURPOSE



**Ideale per settore automobilistico e per veicoli industriali.**

*Ideal for the automotive sector and for the industrial vehicles.*

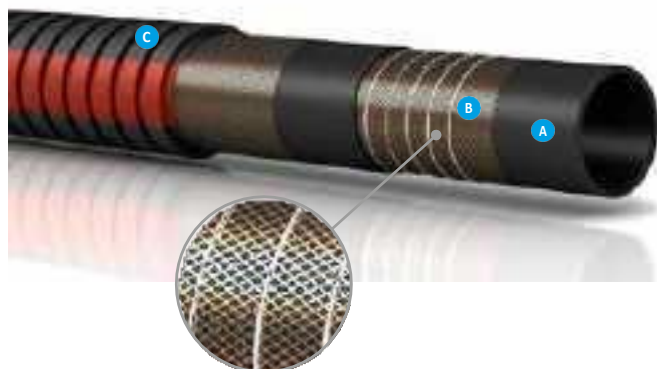

## IMPIEGO / APPLICATIONS

[IT]

Per aspirazione e mandata di olii paraffinici, aria, acqua e glicole. Particolarmente indicato negli impieghi in cui vengano richiesti ridotti raggi di curvatura; trova ampia applicazione nel settore automobilistico e dei veicoli industriali come flessibile multiuso.

[EN]

For paraffinic oils, air, water and glycol suction and delivery. Particularly used where it is necessary a small band radius. Suitable for the automotive sector and for the industrial vehicles.



## STRUTTURA / BODY

**A**

**Sottostrato / Tube**

Gomma nera NBR resistente a oli e carburanti contenuto aromatico non superiore al 50%.  
*Oil and petrol resistant, black NBR, with aromatic content up to 50%.*

**B**

**Inserti / Reinforcement**

Tessili sintetici ad alta tenacità e spirale metallica incorporata, cordicella di rame.  
*High tensile synthetic textile, steel wire helix and antistatic copper wire.*

**C**

**Copertura / Cover**

Gomma EPDM.  
*Oil, weather, ozone, abrasion resistant special synthetic rubber.*

**Superficie / Surface**

Greccato ad impressione tela.  
*Greccato with fabric impression.*

mm	mm	bar	bar	bar	gr/mt	mm	m
19	29	10	30	0,8	540	75	40
25	36	10	30	0,8	710	100	40
30	41	10	30	0,8	871	120	40
32	44	10	30	0,8	1014	130	40
35	46	10	30	0,8	993	140	40
38	49	10	30	0,8	1070	150	40
40	52	10	30	0,8	1249	160	40
45	57	10	30	0,8	1522	190	40
48	58	10	30	0,8	1314	200	40
51	63	10	30	0,8	1752	250	40
60	73	10	30	0,8	2132	310	40
70	83	10	30	0,8	2605	400	40
80	94	10	30	0,8	2983	475	20-40
90	104	10	30	0,8	3326	522	20
98	104	10	30	0,8	3326	522	20
100	117	10	30	0,8	4133	610	20-40
120	138	10	30	0,8	7400	720	20



## FASCETTE E COLLARI STRINGITUBO CONSIGLIATE RECOMMENDED CLAMP/COLLAR

STF - Fascette a vite / Hose clamps with screw

SDB - Fascette a tensione costante SAE / Constant tension clamps SAE

STC - Fascette con bullone / Hose clamps with bolt

STS - Fascette a tensione costante SAE / Constant tension clamps SAE



**i**

NORME / NORMS: ISO 1307

MARCATURA / MARKING:

EUROCORD® OIL SUCTION DELIVERY HOSE W.P. 10 BAR

CONFEZIONAMENTO / BOX: IMBALLO IN POLIETILENE

NERO / PACKAGING IN BLACK POLYETHYLENE

**°C**

-35°C / +100°C

-31°F / +212°F