


# PETROCONN CARBO TXT

[EN] for delivery of fuel oil, gasoline etc.  
widely used in internal combustion engines

[DE] zur förderung von öl und kraftstoffen  
im kfz-bereich insbesondere auf  
verbrennungsmotoren.

[ES] para el suministro de aceite, gasolina y  
de gasóleo. particularmente utilizado para  
los motores a combustión interna

[FR] pour refoulement des huiles et des  
hydrocarbures adapte aux moteurs a  
combustion interne

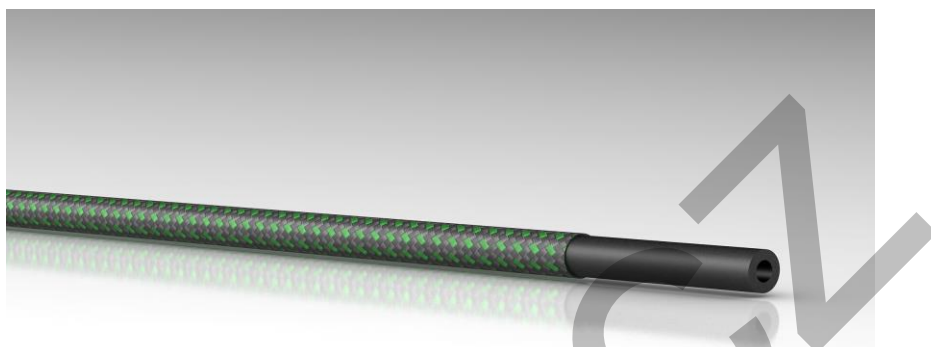

[EN] **TUBE:** oil and fuel resistant NBR  
rubber resistant to petroleum products  
with aromatic content of not over 40%  
**COVER:** textile braid impregnated with  
neoprene solution  
**SURFACE:** braided.

[DE] **SEELE:** öl-und kraftstoffbeständig,  
isolierend, NBR, schwarz, ölprodukten mit  
max 40% aromatengehalt  
**DECKE:** textilgeflecht neopren  
impragnierlösung  
**OBERFLÄCHE:** geflochten.

[ES] **SUSTRATO:** caucho sintético negro  
NBR, resistente a los productos  
petrolíferos con contenido aromatizado no  
superior al 40%.

**COBERTURA :** trenza textil impregnada con  
solución en neopreno  
**SUPERFICIE:** trenzado.

[FR] **TUBE:** caoutchouc NBR, resistant aux  
huiles et aux hydrocarbures a teneur en  
aromatiques jusqu'a 40%

**REVETEMENT:** tresse textile impregnee  
avec solution en neoprene  
**SURFACE:** tresse

mm	inch	mm	bar	bar	bar	gr/mt	mm	mt
3	1/8"	7	10	30	-	40	25	100
4	1/6"	8	10	30	-	50	35	100
5	3/16"	10	10	30	-	80	40	100
6	1/4"	11	10	30	-	100	50	100
6	1/4"	13	10	30	-	140	50	100
7	5/18"	13	10	30	-	130	55	100
7,5	5/16"	14,5	10	30	-	160	60	100
8	5/16"	13	10	30	-	110	65	100
8	5/16"	15	10	30	-	160	65	100
10	3/8"	15	10	30	-	140	80	100
10	3/8"	17	10	30	-	190	80	100
13	1/2"	20	10	30	-	240	130	100
16	5/8"	23	10	30	-	280	160	100
19	3/4"	27	10	30	-	380	190	100
25	1"	33	10	30	-	500	250	100

STF - Hose clamps with screw

-35°C / +85°C  
-31°F / +185°F

NORME: ISO 1307

MARCATURA: -