

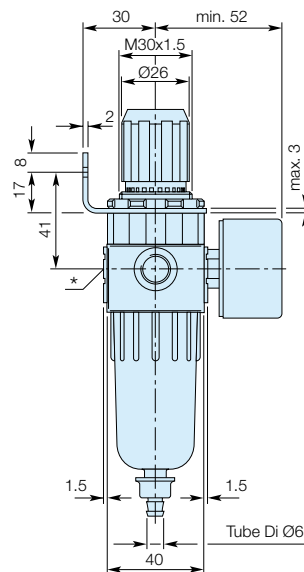


Popular Combinations :

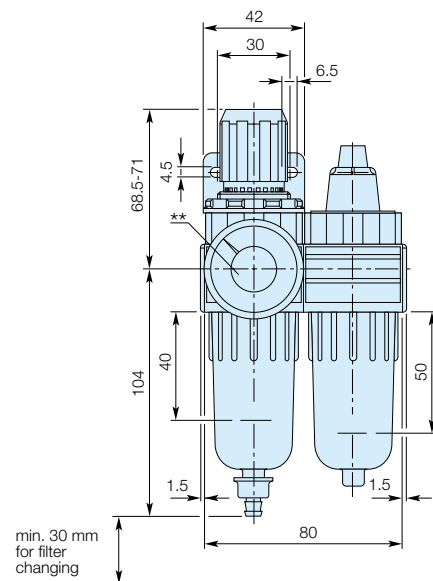

* On delivery the screw plug is not assembled
 ** Two opposite gauge ports 1/8

Filter Regulator + Lubricator Combination -

Polycarbonate bowl, 5 micron, 8-bar with Gauge, Wall mounting Bracket.

Port size	Flow dm ³ /s (scfm)	Manual Push Drain	Weight	Semi-Auto Drain	Weight
1/4"	8.0 (17.0)	P3LCA12PEPGLNW	0.32 kg (70 lbs)	P3LCA12PESGLNW	0.32 kg (70 lbs)

Inlet pressure 10 bar, Secondary pressure 6.3 bar, 1 bar pressure drop.

P 3 L	CA		2	P			N		LNW
Filter/Reg + Lubricator	BSPP NPT	1 9	1/4	5 µ Element 40 µ Element	E G		2 bar 4 bar 8 bar	Z M G	
				Manual push drain Semi-auto drain	P S				

Modular Connector Kit Assembly



P31KA00CB1
 Connects product
 (E/R + F/L)



P31KA00CB2
 Connects product
 (E/R + M + F/L)
P31KA00CB3
 (E/R + F + F)



P31KA00CB4
 Connects product
 (F + L)